DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

User activities: Army - AV
Navy - MC
Air Force -


DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

P.A ARMY-CR	
Other Cust NAVY-AS AF-85	International Interest
Procurement Specification MIL-C-26482	
SUPERSEDES: MS 3476 (NAVY) MIL-C-83723/13B MIL-C-83723/14B	TITLE CONNECTORS, PLUG, ELECTRIC, SERIES 2, CRIMP TYPE, BAYONET COUPLING, CLASSES A, L, S AND W
PAGE 1 OF 4	MS3476
	MILITARY STANDARD

FED. SUP CLASS 5935

5935-3465-6


Ⓓ "ENTIRE STANDARD REVISED"

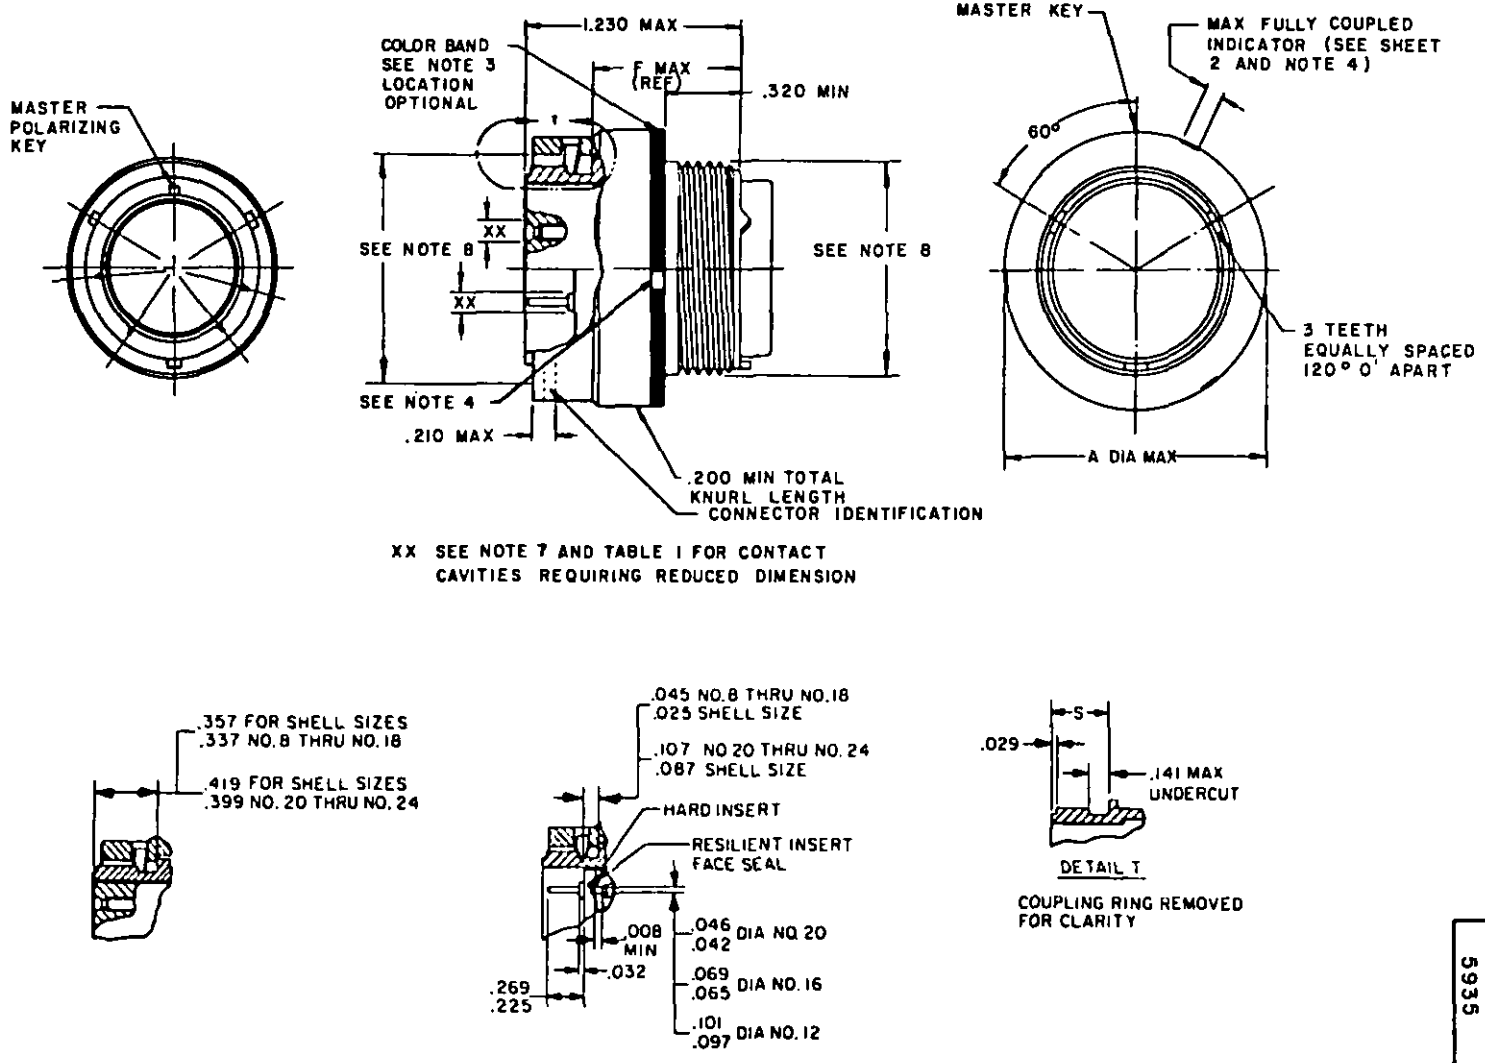


XX SEE NOTE 7 AND TABLE I FOR CONTACT CAVITIES REQUIRING REDUCED DIMENSION

APPROVED 1 APR 71 REVISED Ⓓ 12 Jul 85


Source: https://assist.dla.mil -- Downloaded: 20260-23T13:07Z
Check the source to verify that this is the current version before use.

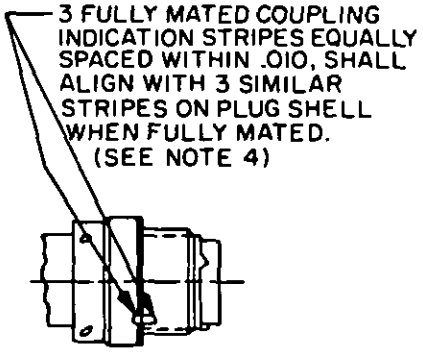


COUPLED POSITION



ASSEMBLED TO STRAIGHT BACKSHELL LESS STRAIN RELIEF (SEE NOTE 6)



ASSEMBLED TO STRAIGHT, BACKSHELL WITH STRAIN RELIEF (SEE NOTE 6)

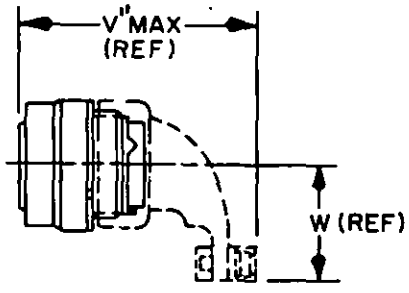

ASSEMBLED TO 90° BACKSHELL WITH STRAIN RELIEF (SEE NOTE 6)

REVISED (D) FOR CHANGES SEE PAGES 1,2,3 AND 4 12 Jul 85

APPROVED 1 APR 71

User activities: Army - AV, Navy - MC, Air Force -

Review activities: Army - AR, Navy - EC, SH, Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A ARMY-CR Other Cust NAVY-AS AF-85	International interest	TITLE CONNECTORS, PLUG, ELECTRIC, SERIES 2, CRIMP TYPE, BAYONET COUPLING, CLASSES A, L, S AND W	MILITARY STANDARD MS3476
Procurement Specification MIL-C-26482		SUPERSEDES: MS 3476 (NAVY) MIL-C-83723/13B MIL-C-83723/14B	PAGE 2 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:07Z
Check the source to verify that this is the current version before use.

INCHES	MM
.008	0.20
.010	0.25
.025	0.64
.029	0.74
.032	0.81
.042	1.07
.045	1.14
.046	1.17
.065	1.65
.069	1.75
.087	2.21
.097	2.46
.101	2.57
.107	2.72
.141	3.58
.200	5.08
.210	5.33
.225	5.72
.269	6.83
.320	8.13
.337	8.56
.357	9.07
.399	10.13
.419	10.64
1.230	31.24

Size	A	F	S	V	V'	V"	W	Max weight (lbs)* Pin	Socket
8	.782 (19.86)	.887 (22.53)	.363/.343 (9.22/8.71)	1.507 (38.28)	1.857 (47.17)	2.130 (54.10)	.830 (21.08)	.0204 (.518)	.0216 (.549)
10	.926 (23.52)	.887 (22.53)	.363/.343 (9.22/8.71)	1.507 (38.28)	1.857 (47.17)	2.130 (54.10)	.880 (22.35)	.0406 (1.031)	.0421 (1.069)
12	1.043 (26.49)	.887 (22.53)	.363/.343 (9.22/8.71)	1.507 (38.28)	1.857 (47.17)	2.265 (57.53)	.950 (24.13)	.0505 (1.283)	.0536 (1.361)
14	1.193 (30.05)	.887 (22.53)	.363/.343 (9.22/8.71)	1.507 (38.28)	2.092 (53.14)	2.355 (59.82)	1.010 (25.65)	.0639 (1.623)	.0692 (1.758)
16	1.305 (33.15)	.887 (22.53)	.363/.343 (9.22/8.71)	1.507 (38.28)	2.092 (53.14)	2.490 (63.25)	1.070 (27.18)	.0788 (2.002)	.0880 (2.235)
18	1.391 (35.33)	.887 (22.53)	.363/.343 (9.22/8.71)	1.507 (38.28)	2.092 (53.14)	2.589 (65.76)	1.130 (28.70)	.0864 (2.195)	.0957 (2.431)
20	1.531 (38.89)	.825 (20.96)	.425/.405 (10.80/10.29)	1.507 (38.28)	2.092 (53.14)	2.722 (69.14)	1.190 (30.23)	.1016 (2.581)	.1114 (2.830)
22	1.656 (42.06)	.825 (20.96)	.425/.405 (10.80/10.29)	1.507 (38.28)	2.092 (53.14)	2.845 (72.26)	1.260 (32.00)	.1241 (3.152)	.1363 (3.462)
24	1.777 (45.14)	.825 (20.96)	.425/.405 (10.80/10.29)	1.507 (38.28)	2.092 (53.14)	2.967 (75.36)	1.320 (33.53)	.1400 (3.556)	.1916 (4.867)

*Less contacts and accessories. Maximum weights do not apply to class S.

APPROVED 1 APR 71 REVISED (D) FOR CHANGES SEE PAGES 1,2,3 AND 4 12 Jul 85

User activities: Army - AV, Navy - MC, Air Force -
Review activities: Army - AR, Navy - EC, SH, Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A ARMY-CR Other Cust NAVY-AS AF-85	International interest	TITLE CONNECTORS, PLUG, ELECTRIC, SERIES 2, CRIMP TYPE, BAYONET COUPLING, CLASSES A, L, S AND W	MILITARY STANDARD MS3476
Procurement Specification MIL-C-26482		SUPERSEDES: MS 3476 (NAVY) MIL-C-83723/13B MIL-C-83723/14B	PAGE 3 OF 4

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:07Z
Check the source to verify that this is the current version before use.

TABLE I. Reduced diameters (XX).

Shell size	Insert arrangements	Contact cavities
8	-33 & -98	A, B, C
12	-10	C, G
14	-12	A, B, C, D, E, F, G, H
14	-18	A, C, E, G, J, L
14	-19	B, D, F, H, K, M
16	-26	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R
18	-32	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T
22	-41	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y

Connector part numbering

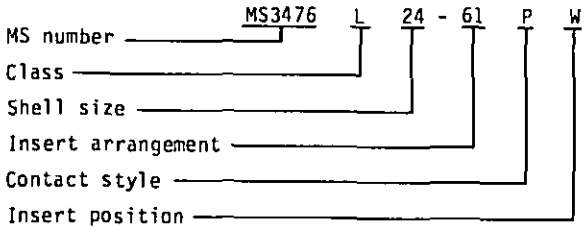

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.005 (0.13 mm) for three place decimals and ±.01 (0.3 mm) for two place decimals, and angular tolerances are ±0° ±1° and 0° 0' ±30'.
3. Color band: .070 ±.031 wide, color blue.
4. Coupling indicator, color optional.
5. The complete requirements for procuring this connector described herein shall consist of this document and the issue in effect of MIL-C-26482.
6. Connector assembly must be used with a backshell. Backshell must be procured separately. See MIL-C-85049 for applicable backshells.
7. Insert arrangements requiring reduced diameters for raised seal barriers or lead-in chamfer on outer row of contact cavities as indicated. (See table II).
8. Intermateability and rear accessory interchangeability dimensions shall be in accordance with MIL-C-26482.
9. For insert arrangements see MIL-STD-1669.
10. Connector identification marking shall be in accordance with MIL-C-26482. Example: MS3476 L----, M83723-14 R----, (minimum height does not apply to shell sizes 8, 10 and 12).
11. Class E cancelled and replaced by class L.
12. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
13. Referenced documents shall be of the issue in effect on date of invitations for bids.
14. Metric equivalents are given for general information only.
15. Metric equivalents are in parentheses.

APPROVED 1 APR 71
REVISED (D) FOR CHANGES SEE PAGES 1,2,3 AND 4 12 Jul 85

User activities: Army - AV, Navy - MC, Air Force -
Review activities: Army - AR, Navy - EC, SH, Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A ARMY-CR Other Cust NAVY-AS AF-85	International interest	TITLE CONNECTORS, PLUG, ELECTRIC, SERIES 2, CRIMP TYPE, BAYONET COUPLING, CLASSES A, L, S AND W	MILITARY STANDARD MS3476
Procurement Specification MIL-C-26482		SUPERSEDES: MS 3476 (NAVY) MIL-C-83723/13B MIL-C-83723/14B	PAGE 4 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:07Z
Check the source to verify that this is the current version before use.