

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. STOCK CLASS 5305

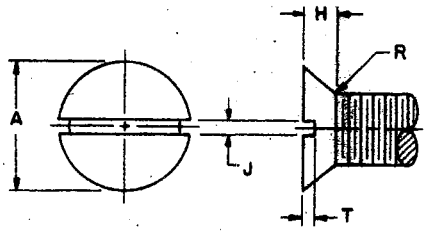

FULL HEAD

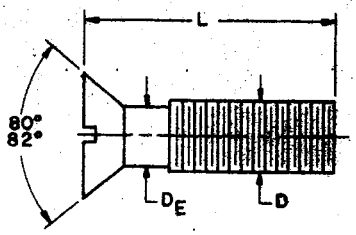



UNDERCUT HEAD

	NOMINAL SIZE D		#1 (.0730)	#2 (.0860)	#4 (.1120)	#6 (.1380)	#8 (.1640)	#10 (.1900)	1/4 (.2500)	5/16 (.3125)
	THREADS PER INCH		64NC	56NC	40NC	32NC	32NC	24NC	20UNC	18UNC
	BODY DIAMETER D_E	Max	.0730	.0860	.1120	.1380	.1640	.1900	.2500	.3125
		Min	.0603	.0717	.0925	.1141	.1399	.1586	.2127	.2712
	HEAD DIAMETER A	Max Sharp	.146	.172	.225	.279	.332	.385	.507	.635
		Min Sharp	.130	.156	.207	.257	.308	.359	.477	.600
		Abs Min	.126	.150	.200	.249	.300	.348	.462	.581
	SLOT WIDTH J	Max	.026	.031	.039	.048	.054	.060	.075	.084
		Min	.019	.023	.031	.039	.045	.050	.064	.072
	FLAT S	Max	.003	.003	.004	.005	.006	.007	.009	.011
	RADIUS R	Max	.031	.036	.050	.063	.063	.083	.100	.111
FULL HEAD	HEAD HEIGHT H	Max	.043	.051	.067	.083	.100	.116	.153	.191
		Min	.033	.040	.055	.069	.084	.098	.131	.165
FULL HEAD	SLOT DEPTH T	Max	.019	.023	.030	.038	.045	.053	.070	.088
		Min	.012	.015	.020	.024	.029	.034	.046	.058
UNDERCUT HEAD	HEAD HEIGHT H_1	Max	.032	.037	.048	.060	.071	.083	.108	.135
		Min	.022	.026	.036	.046	.055	.065	.086	.109
UNDERCUT HEAD	SLOT DEPTH T_1	Max	.016	.019	.025	.032	.037	.044	.058	.073
		Min	.012	.015	.020	.024	.029	.034	.046	.058

THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.

Length L	Tolerance	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
1/8		1	8	18	31	46			
3/16		2	9	19	32	47	65		
1/4		3	10	20	33	48	66		
5/16		4	11	21	34	49	67	83	
3/8		5	12	22	35	50	68	84	99
7/16	+0	6	13	23	36	51	69	85	100
1/2	-1/32	7	14	24	37	52	70	86	101
5/8			15	25	38	53	71	87	102
3/4			16	26	39	54	72	88	103
7/8			17	27	40	55	73	89	104
1				28	41	56	74	90	105
1-1/4	+0			29	42	57	75	91	106
1-1/2	-1/16			30	43	58	76	92	107
1-3/4					44	59	77	93	108
2					45	60	78	94	109
2-1/4						61	79	95	110
2-1/2	+0					62	80	96	111
2-3/4	-3/32					63	81	97	112
3						64	82	98	113

Minimum complete thread length of 1-3/4.

Ⓐ CANCELLED
SEE SHEET 2

MATERIAL: Brass, Specification QQ-B-611 or QQ-W-321.
FINISH: Black Oxide, Specification JAN-F-495, Type III.
THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.
NOTES: (1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS 35247-1.
(4) Sizes above dotted line have undercut head.
(5) All dimensions in inches.

Ⓐ For changes see sheets 1 and 2.

APPROVED FEB 9, 1954 REVISED Ⓐ

P.A.	WC
Other Cust	Ships MOAMA

TITLE: SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, BRASS, BLACK OXIDE FINISH, NC-2A AND UNC-2A.

MILITARY STANDARD
MS 35247

PROCUREMENT SPECIFICATION: FF-S-92

SUPERSEDES:

SHEET OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-03-17 12Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS
5305

NOMINAL SIZE		D	3/8 (.3750)	7/16 (.4375)	1/2 (.5000)	9/16 (.5625)	5/8 (.6250)	3/4 (.7500)		
THREADS PER INCH			16UNC	14UNC	13UNC	12UNC	11UNC	10UNC		
BODY DIAMETER		D_E Max	.3750	.4375	.5000	.5625	.6250	.7500		
		D_E Min	.3287	.3850	.4435	.5016	.5589	.6773		
HEAD DIAMETER		A Max Sharp	.762	.812	.875	1.000	1.125	1.375		
		A Min Sharp	.722	.771	.831	.950	1.069	1.306		
		A Abs Min	.700	.743	.802	.919	1.035	1.267		
SLOT WIDTH		J Max	.094	.094	.106	.118	.133	.149		
		J Min	.081	.081	.091	.102	.116	.131		
FLAT		S Max	.013	.016	.018	.020	.023	.027		
RADIUS		R Max	.125	.143	.154	.167	.182	.200		
FULL HEAD	HEAD HEIGHT	H Max	.230	.223	.223	.260	.298	.372		
		H Min	.200	.190	.186	.220	.253	.319		
	SLOT DEPTH	T Max	.106	.103	.103	.120	.137	.171		
		T Min	.070	.066	.065	.077	.088	.111		
UNDERCUT HEAD	HEAD HEIGHT	H_1 Max	.162	.156	.160	.185	.212	.264		
		H_1 Min	.132	.126	.123	.145	.167	.211		
	SLOT DEPTH	T_1 Max	.088	.085	.085	.100	.114	.142		
		T_1 Min	.070	.066	.065	.077	.088	.111		

THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.

Length L	Tolerance	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
1/8, 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 7/8, 1	+0 -1/32	114 115 116 117 118 119	127 128 129 130 131	139 140 141 142	150 151 152	160 161 162	170 171
1-1/4, 1-1/2, 1-3/4, 2	+0 -1/16	120 121 122	132 133 134	143 144 145	153 154 155	163 164 165	172 173 174
Minimum complete thread length of 1-3/4. 2-1/4, 2-1/2, 2-3/4, 3	+0 -3/32	123 124 125 126	135 136 137 138	146 147 148 149	156 157 158 159	166 167 168 169	175 176 177 178

Ⓐ CANCELLED SEE NOTE

NOTE: For illustration, material, finish, and other pertinent data, see sheet 1.

Ⓐ CANCELLED AFTER _____ USE MS 35198. INTERCHANGEABILITY RELATIONSHIP-MS 35198 can replace the cancelled screws of the same size. The cancelled MS 35247 cannot always replace MS 35198 and should be used until existing stock is depleted. Then use only the superseding MS screws of the same size for design and replacement.

APPROVED FEB 9, 1954 REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust Ships MOAMA	TITLE SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, BRASS, BLACK OXIDE FINISH, NC-2A AND UNC-2A	MILITARY STANDARD MS 35247	
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES:	SHEET	OF

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-23117:12Z
Check the source to verify that this is the currentversion before use.