


FED. SUP CLASS
2350

INACTIVE FOR DESIGN AFTER 16 FEB 88
Ⓒ NO SUPERSEDING STANDARD. SEE
MIL-STD-962 FOR STATUS CRITERIA.

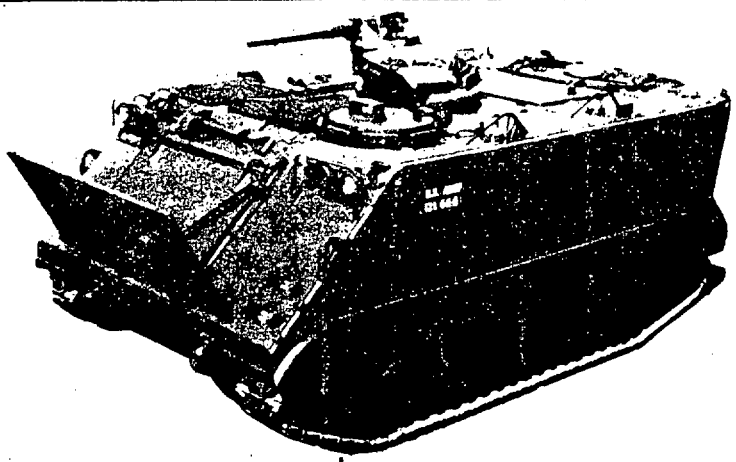

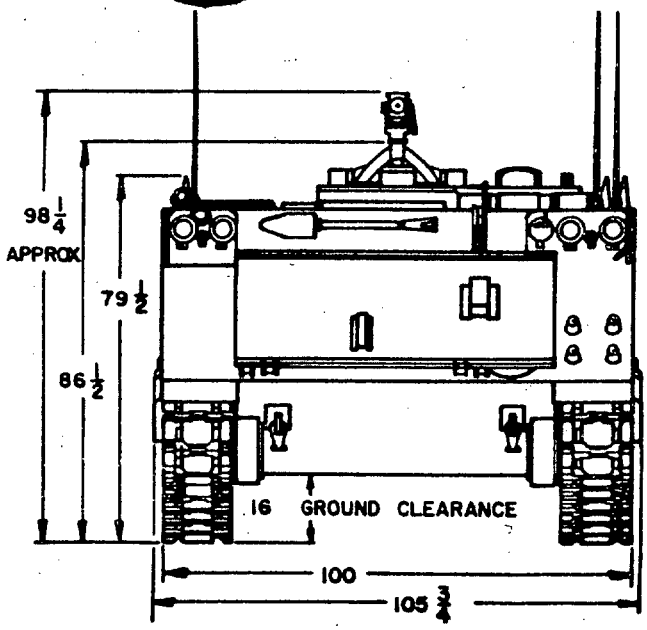

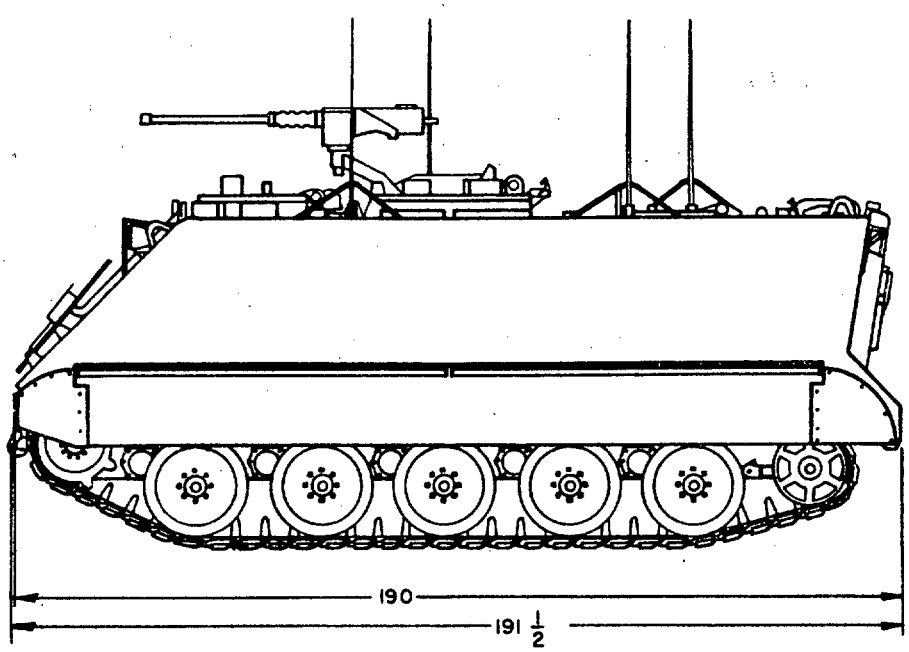

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by the US Army Tank-Automotive Materiel Readiness Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

APPROVED 24 JAN 66 REVISED Ⓐ 15 JAN 74 Ⓑ 3 MAR 81 Ⓒ 16 FEBRUARY 88

DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

Ⓑ DENOTES CHANGES

MS PART NO.	REFERENCE DRAWING
MS 500033-1	8750305

P.A. ARMY-AT Other Cust	International Interest	TITLE
		CARRIER, PERSONNEL, FULL-TRACKED: ARMORED, M113

PROCUREMENT SPECIFICATION	SUPERSEDES
MIL-C-45355	

MILITARY STANDARD

MS 500033(AT)

SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.

DD FORM 672-1 (Coordinated)

2350-A401

VEHICLE CHARACTERISTICS

WEIGHT: COMBAT LOADED, 23520 LBS.
CREW: 13
WEIGHT: LESS CREW, STOWAGE, AND FUEL: 18600 LBS.

CENTER OF GRAVITY:
39 IN. ABOVE GROUND
79 IN. FROM CENTER LINE OF SPROCKET
UNIT GROUND PRESSURE: 7.4 LBS./SQ. IN.

(ALL WEIGHTS ARE APPROXIMATE AND ARE FOR ENGINEERING REFERENCE ONLY.)

VISION AND SIGHTING EQUIPMENT:
PERISCOPE, VISION, M 17,
PART NO. 7043549
DRIVER 4, COMMANDER 5
PERISCOPE, INFRARED VISION, M 19
PART NO. 7652971, DRIVER 1
SPARE HEAD, PART NO. 7688707, 1

ARMAMENT: 1 MACHINE GUN,
CALIBER 50, TYPE, M2 HB,
(B) PART NO. 7265636 .
1 MOUNT, GUN, PART NO. 7046650

AMMUNITION: 2000 ROUNDS, CALIBER 50

RUNNING GEAR: SUSPENSION, TYPE IND.- TORSION BAR, TEN DUAL WHEELS, 5 EACH SIDE, WHEEL SIZE, 24 IN.
TRACK TYPE, STEEL, SINGLE PIN, W/DETACHABLE PADS.
NO. OF SHOES/TRACK, 63 L - 64 R,
PITCH 6 IN., WIDTH 15 IN.
TEN TIRES, DUAL TYPE SOLID RUBBER, SIZE, 24 X 2-1/8

ELECTRICAL SYSTEM:
INST'N. DWG. NO. 1087531
NOMINAL, 24 VOLTS
GENERATOR, MAIN: 100 AMPERES,
(B) PART NO. 10947517
BATTERY, 2, TYPE: 6 TN, 12 VOLTS, MS 35000.
IGNITION SYSTEM: BATTERY TYPE

POWER PACKAGE:

ENGINE:
MODEL: 75M, CHRYSLER
TYPE: OVERHEAD VALVE, 90° V-8
DISPLACEMENT: 361 CU. IN.
BORE: 4.125 IN., STROKE: 3.375 IN.
GOVERNED SPEED: 4000 RPM., FULL LOAD
COMPRESSION RATIO: 7.8:1
(B) FUEL: GASOLINE, CAPACITY, 85 GAL,
MIN. GROSS HORSEPOWER: 194 AT 4000 RPM.
MIN. GROSS TORQUE: 302 LB. FT. AT 2800 RPM.
COOLING SYSTEM, LIQUID, 9-1/2 GALLONS
OIL CAP. 10 QTS. W/FILTER AND LINES.
OIL COOLING SYSTEM: OIL/WATER.

POWER TRAIN: INST'N. DWG. NO. 8756905

COMMUNICATIONS:
RADIO SET, SEE OVE. LIST NO. 8750305

FIRE EXTINGUISHERS, CARBON DIOXIDE:
(B) FIXED, 5 LB; INST'N. DWG NO. 8767183
PORTABLE, 5 LB. PART NO. 7359703 OR 7714780

PERFORMANCE:
GROSS HORSEPOWER TO WEIGHT RATIO: 16.9 HP/TON
MAX. TRACTIVE EFFORT: 18000 LBS. TE/W 78.5
(B) MAX. SPEED: 40 MPH. MAX GRADE 60%
MAX. TRENCH: 66 IN.
MAX. VERTICAL WALL: 24 IN.
CRUISING RANGE: 200 MILES
FORDING DEPTH: UNLIMITED

GENERAL:
THE M 113 FULL TRACKED ARMORED PERSONNEL CARRIER IS A LIGHTWEIGHT, LOW SILHOUETTE VEHICLE DESIGNED TO TRANSPORT PERSONNEL OR CARGO. THE VEHICLE IS CAPABLE OF AMPHIBIOUS OPERATIONS ON SMALL LAKES AND STREAMS, OF EXTENDED CROSS-COUNTRY TRAVEL OVER ROUGH TERRAIN, AND OF HIGH-SPEED OPERATIONS ON IMPROVED ROADS AND HIGHWAYS. THE VEHICLE IS ALSO CAPABLE OF BEING TRANSPORTED BY CARGO AIRCRAFT AND PARACHUTE DROPPED TO USING FORCES. THE VEHICLE ACCOMMODATES A DRIVER, TROOP COMMANDER, AND 11 PERSONNEL.

(FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.)

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.)

(B) THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM:

US ARMY TANK-AUTOMOTIVE COMMAND
ATTN: DRSTA-GSS
WARREN, MICHIGAN 48090

INACTIVE FOR DESIGN AFTER 16 FEB 88
© NO SUPERSEDING STANDARD. SEE MIL-STD-962 FOR STATUS CRITERIA.

PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABCA-ARMY-STD-151. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

APPROVED 24 JAN 66 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2 (C) 16 FEBRUARY 88

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A. Other Cust	International Interest	TITLE	MILITARY STANDARD
		CARRIER, PERSONNEL, FULL-TRACKED: ARMORED, M113	MS 500033(AT)
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45Z
Check the source to verify that this is the current version before use.