INCH-POUND

MS51524B
17 March 2016
SUPERSEDING
MS51524A
17 January 1979

DETAIL SPECIFICATION SHEET

TEE, TUBE TO SWIVEL, SWIVEL ON BRANCH, 37 DEGREE FLARED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Inactive for new design after 17 August 1999. For new design, use SAE-J514.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-18866.

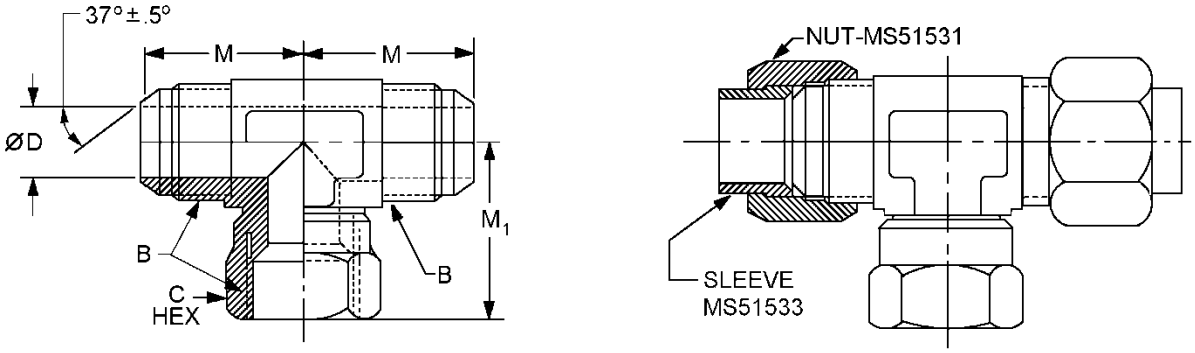


FIGURE 1. T-tube to swivel.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

Suffix designator		Tube OD nom.	B Straight thread Class A or B	C Hex flat Nom.	D diameter	
Assembly	Body (see note 7)				Basic inches (mm)	Tolerance inches (mm)
A2	B2	.1250 (3.175)	.3125-24 UNF-2	7/16	.062 (1.57)	±.003 (0.08)
A3	B3	.1875 (4.763)	.3750-24 UNF-2	1/2	.125 (3.18)	
A4	B4	.2500 (6.350)	.4375-20 UNF-2	9/16	.172 (4.37)	
A5	B5	.3125 (7.936)	.5000-20 UNF-2	5/8	.234 (5.94)	
A6	B6	.3750 (9.525)	.5625-18 UNF-2	11/16	.297 (7.54)	±.004 (0.10)
A8	B8	.5000 (12.700)	.7500-16 UNF-2	7/8	.391 (9.93)	
A10	B10	.6250 (15.875)	.8750-14 UNF-2	1	.484 (12.29)	
A12	B12	.7500 (19.050)	1.0625-12 UN-2	1 1/4	.609 (15.47)	±.005 (0.13)
A14	B14	.8750 (22.225)	1.1875-12 UN-2	1 3/8	.718 (18.24)	
A16	B16	1.0000 (25.400)	1.3125-12 UN-2	1 1/2	.844 (21.44)	±.007 (0.18)
A20	B20	1.2500 (31.750)	1.6250-12 UN-2	2	1.078 (27.38)	+.008 -.005 (+0.20 -0.13)
A24	B24	1.5000 (38.100)	1.8750-12 UN-2	2 1/4	1.312 (33.32)	
A32	B32	2.0000 (50.800)	2.500-12 UN-2	2 7/8	1.781 (45.24)	+.010 -.005 (+0.25 -.013)

Suffix designator		M inches (mm) ±.030 (0.08)	M_1 inches (mm) ±.060 (0.15)
Assembly	Body		
A2	B2	.770 (19.56)	.970 (24.64)
A3	B3	.830 (21.08)	1.000 (25.40)
A4	B4	.890 (22.61)	1.000 (25.40)
A5	B5	.950 (24.13)	1.060 (26.92)
A6	B6	1.060 (26.92)	1.250 (31.75)
A8	B8	1.250 (31.75)	1.380 (35.05)
A10	B10	1.450 (36.83)	1.620 (41.15)
A12	B12	1.660 (42.16)	1.750 (44.45)
A14	B14	1.730 (43.94)	1.780 (45.21)
A16	B16	1.810 (45.97)	2.000 (50.80)
A20	B20	2.060 (52.32)	2.310 (58.67)
A24	B24	2.330 (59.18)	2.590 (65.79)
A32	B32	3.060 (77.72)	3.380 (85.85)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Break all sharp edges and remove all burrs and slivers.
4. Dimensions and tolerances not shown shall be in accordance with SAE-J514 for 37° flared fittings.
5. The drawing is for identification purposes only and is not intended to restrict designs and shapes not dimensioned.
6. Threads shall be in accordance with ASME B1.1.
7. Bodies will be used for production only and shall not be stocked for maintenance.

FIGURE 1. T-tube to swivel - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Fittings shall be as specified on figure 1 and in tables I and II.

Components of the assemblies shall be of the same material and finish.

Materials shall be in accordance with MIL-DTL-18866 and table I.

TABLE I. Materials.

Material	Form	Specification	Alloy
Carbon steel	Bar	SAE-J403	1117, 1126, 1140, 1213, 1215, or 12L14
	Forgings		
Chrome-molybdenum steel	Bars	SAE-AMS6370	4130
	Forgings	SAE-AMS6382	
		SAE-AMS6370	
Corrosion resistant steel	Bars and forgings	ASTM A276/A276M	304, 304L, 316, or 321
		ASTM A564/A564M	XM-12 (15-5 PH) UNS S15500 or 630 (17-4 PH) UNS S17400
		SAE-AMS5639	UNS S30400
		SAE-AMS5645	UNS S32100
		SAE-AMS5647	UNS S30403
		SAE-AMS5743	UNS S35500
	Bar	ASTM A582/A582M	UNS S30300
Nickel-copper alloy	Bar	ASTM B164 QQ-N-281	UNS N04400
High-chromium nickel alloy	Bar	ASTM B166	UNS N06690
	Forgings	ASTM B564	
Titanium 1/	Bars	SAE-AMS4928	6AI-4V annealed
	Forgings		

1/ Titanium shall not be used in oxygen or potable water systems.

Finish. Finishes shall be as specified in table II. All platings shall be capable of meeting a minimum of 96 hours salt spray test in accordance with ASTM B117. The fittings shall show no evidence of corrosion after 96 hours of salt spray. Fluid passages, other openings and internal threads shall not be subject to the plating thickness requirement and may have bare areas provided they are protected with a light film of oil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE II. Material and finish identification codes.

PIN code material/plating finish	Material	Plating finish
Blank	Steel	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 2 or SAE-AMS-QQ-P-416, type II, class 2. 1/
H	Steel	Zinc-Aluminum in accordance with ASTM F1136/F1136M, grade 3, NC.
J	Steel	Zinc-nickel in accordance with SAE-AMS2417, type 2, grade B. 3/
M	Nickel-copper alloy UNS N04400	No additional finish.
N	High-chromium nickel alloy UNS N06690	No additional finish.
P	Steel	Zinc phosphate finish in accordance MIL-DTL-16232 type Z, class 4. 2/
R	Steel	Zinc plating in accordance with ASTM B633; type VI, Fe/Zn 12. 5/
S	Corrosion resistant steel	No additional finish. Passivation in accordance with SAE-AMS2700, method 1, type 6 or 7.
T	Titanium	Anodize in accordance with SAE-AMS2488 type 2. 4/
TF	Titanium	Fluoride phosphate in accordance with SAE-AMS2486. 4/
Z	Steel	Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 12, or ASTM B695, type II, class 12. 5/
ZC	Steel	Zinc may be any zinc plating from PIN codes H, J, and R with a colored chromate coating 5/

1/ Embrittlement test need not be run. Cadmium shall not be used in oxygen or potable water systems.
2/ Hexavalent chromium free. Finish shall be ROHS compliant.
3/ The zinc-nickel alloy plate shall contain 12% to 16% nickel. The coating thickness shall be 315µ inches (8µm) minimum coating thickness.
4/ A pretreatment, a modification of the fluoride treatment, or a post treatment shall be applied so the final color of the fittings shall be similar to FED-STD-595 colors 36076 through 36293.
5/ Not for use in aircraft. Requires approval from the Program Officer for all applications.


Trivalent wrenchability. When the finish has been damaged due to poor wrenchability, the surface of the connector shall be touched up using one of the brush plating processes below as appropriate to primary finish. The term “trivalent wrenchability” is used to evaluate the ability of the finish to withstand abrasion from an excessive amount of wrenching.

a. Brush plating of hard chromium by electrodeposition shall be in accordance with SAE-AMS-2451/5.
b. Brush plating of medium-hardness, low stress nickel by electrodeposition shall be in accordance with SAE-AMS-2451/9.

Maximum operating pressure. Maximum operating pressure shall be in accordance with SAE-J514.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

PIN: The PIN consists of the letters “MS”, the specification number, a letter and number for tee size, and a letter for material finish designator.

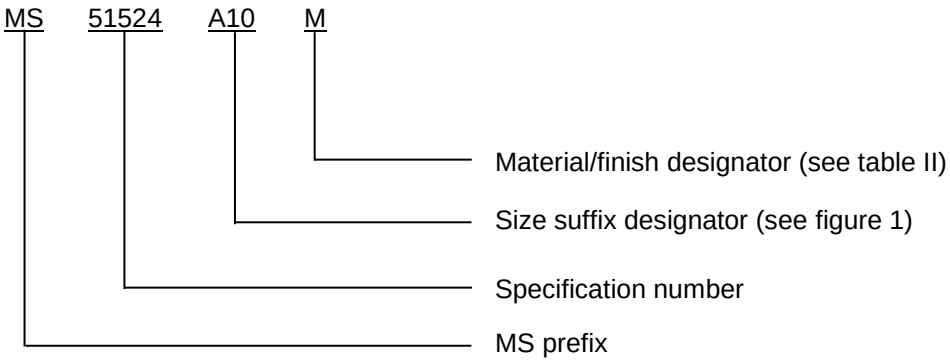

PIN example: MS51524A10M indicates a tee, tube to swivel, .6250 inch (15.875 mm), nickel-copper alloy.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Table III provides a detailed cross-reference of inactive MS51524 PIN’s and for new design SAE-J514 PIN’s.

MS51524 parts have straight threads in accordance with ASME B1.1 the SAE parts have straight threads in accordance with SAE-J425.

Plating “P” SAE allows a range of nickel from 6% to 20%. Below 12%, ZnNi is not much better than zinc plating, which is less expensive and easier to apply. Above 16%, ZnNi becomes more cathodic and no longer acts as a sacrificial coating - if a high nickel coating is damaged the steel beneath the coating will corrode at an accelerated rate.

Users are cautioned to evaluate replacement parts for their particular application.

CAUTION: The superseding information is valid as of the date of this specification and may be superseded by subsequent revisions of the superseding document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE III. MS51524 to SAE-J514 cross reference.

Inactive for new design MS51524- PIN		TUBE O.D.	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51524A2	MS51524B2	1/8	Not available	Not available
MS51524A2H	MS51524B2H	1/8	Not available	Not available
MS51524A2J	MS51524B2J	1/8	Not available	Not available
MS51524A2M	MS51524B2M	1/8	J514-2-2-2-070433MA	J514-2-2-2-070433MB
MS51524A2N	MS51524B2N	1/8	J514-2-2-2-070433NA	J514-2-2-2-070433NB
MS51524A2P	MS51524B2P	1/8	J514-2-2-2-070433PA	J514-2-2-2-070433PB
MS51524A2R	MS51524B2R	1/8	Not available	Not available
MS51524A2S	MS51524B2S	1/8	J514-2-2-2-070433SA	J514-2-2-2-070433SB
MS51524A2T	MS51524B2T	1/8	J514-2-2-2-070433TA	J514-2-2-2-070433TB
MS51524A2TF	MS51524B2TF	1/8	Not available	Not available
MS51524A2Z	MS51524B2Z	1/8	J514-2-2-2-070433ZA	J514-2-2-2-070433ZB
MS51524A2ZC	MS51524B2ZC	1/8	Not available	Not available
MS51524A3	MS51524B3	3/16	Not available	Not available
MS51524A3H	MS51524B3H	3/16	Not available	Not available
MS51524A3J	MS51524B3J	3/16	Not available	Not available
MS51524A3M	MS51524B3M	3/16	J514 3-3-3-070433MA	J514 3-3-3-070433MB
MS51524A3N	MS51524B3N	3/16	J514 3-3-3-070433NA	J514 3-3-3-070433NB
MS51524A3P	MS51524B3P	3/16	J514 3-3-3-070433PA	J514 3-3-3-070433PB
MS51524A3R	MS51524B3R	3/16	Not available	Not available
MS51524A3S	MS51524B3S	3/16	J514 3-3-3-070433SA	J514 3-3-3-070433SB
MS51524A3T	MS51524B3T	3/16	J514 3-3-3-070433TA	J514 3-3-3-070433TB
MS51524A3TF	MS51524B3TF	3/16	Not available	Not available
MS51524A3Z	MS51524B3Z	3/16	J514 3-3-3-070433ZA	J514 3-3-3-070433ZB
MS51524A3ZC	MS51524B3ZC	3/16	Not available	Not available
MS51524A4	MS51524B4	1/4	Not available	Not available
MS51524A4H	MS51524B4H	1/4	Not available	Not available
MS51524A4J	MS51524B4J	1/4	Not available	Not available
MS51524A4M	MS51524B4M	1/4	J514-4-4-4-070433MA	J514-4-4-4-070433MB
MS51524A4N	MS51524B4N	1/4	J514-4-4-4-070433NA	J514-4-4-4-070433NB
MS51524A4P	MS51524B4P	1/4	J514-4-4-4-070433PA	J514-4-4-4-070433PB
MS51524A4R	MS51524B4R	1/4	Not available	Not available
MS51524A4S	MS51524B4S	1/4	J514-4-4-4-070433SA	J514-4-4-4-070433SB
MS51524A4T	MS51524B4T	1/4	J514-4-4-4-070433TA	J514-4-4-4-070433TB
MS51524A4TF	MS51524B4TF	1/4	Not available	Not available
MS51524A4Z	MS51524B4Z	1/4	J514-4-4-4-070433ZA	J514-4-4-4-070433ZB
MS51524A4ZC	MS51524B4ZC	1/4	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE III. MS51524 to SAE-J514 cross reference - Continued.

Inactive for new design MS51524- PIN		Tube O.D.	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51524A5	MS51524B5	5/16	Not available	Not available
MS51524A5H	MS51524B5H	5/16	Not available	Not available
MS51524A5J	MS51524B5J	5/16	Not available	Not available
MS51524A5M	MS51524B5M	5/16	J514-5-5-5-070433MA	J514-5-5-5-070433MB
MS51524A5N	MS51524B5N	5/16	J514-5-5-5-070433NA	J514-5-5-5-070433NB
MS51524A5P	MS51524B5P	5/16	J514-5-5-5-070433PA	J514-5-5-5-070433PB
MS51524A5ZR	MS51524B5ZR	5/16	Not available	Not available
MS51524A5S	MS51524B5S	5/16	J514-5-5-5-070433SA	J514-5-5-5-070433SB
MS51524A5T	MS51524B5T	5/16	J514-5-5-5-070433TA	J514-5-5-5-070433TB
MS51524A5TF	MS51524B5TF	5/16	Not available	Not available
MS51524A5Z	MS51524B5Z	5/16	J514-5-5-5-070433ZA	J514-5-5-5-070433ZB
MS51524A5ZC	MS51524B5ZC	5/16	Not available	Not available
MS51524A6	MS51524B6	3/8	Not available	Not available
MS51524A6H	MS51524B6H	3/8	Not available	Not available
MS51524A6J	MS51524B6J	3/8	Not available	Not available
MS51524A6M	MS51524B6M	3/8	J514-6-6-6-070433MA	J514-6-6-6-070433MB
MS51524A6N	MS51524B6N	3/8	J514-6-6-6-070433NA	J514-6-6-6-070433NB
MS51524A6P	MS51524B6P	3/8	J514-6-6-6-070433PA	J514-6-6-6-070433PB
MS51524A6R	MS51524B6R	3/8	Not available	Not available
MS51524A6S	MS51524B6S	3/8	J514-6-6-6-070433SA	J514-6-6-6-070433SB
MS51524A6T	MS51524B6T	3/8	J514-6-6-6-070433TA	J514-6-6-6-070433TB
MS51524A6TF	MS51524B6TF	3/8	Not available	Not available
MS51524A6Z	MS51524B6Z	3/8	J514-6-6-6-070433ZA	J514-6-6-6-070433ZB
MS51524A6ZC	MS51524B6ZC	3/8	Not available	Not available
MS51524A8	MS51524B8	1/2	Not available	Not available
MS51524A8H	MS51524B8H	1/2	Not available	Not available
MS51524A8J	MS51524B8J	1/2	Not available	Not available
MS51524A8M	MS51524B8M	1/2	J514-8-8-8-070433MA	J514-8-8-8-070433MB
MS51524A8N	MS51524B8N	1/2	J514-8-8-8-070433NA	J514-8-8-8-070433NB
MS51524A8P	MS51524B8P	1/2	J514-8-8-8-070433PA	J514-8-8-8-070433PB
MS51524A8R	MS51524B8R	1/2	Not available	Not available
MS51524A8S	MS51524B8S	1/2	J514-8-8-8-070433SA	J514-8-8-8-070433SB
MS51524A8T	MS51524B8T	1/2	J514-8-8-8-070433TA	J514-8-8-8-070433TB
MS51524A8TF	MS51524B8TF	1/2	Not available	Not available
MS51524A8Z	MS51524B8Z	1/2	J514-8-8-8-070433ZA	J514-8-8-8-070433ZB
MS51524A8ZC	MS51524B8ZC	1/2	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE III. MS51524 to SAE-J514 cross reference - Continued.

Inactive for new design MS51524- PIN		Tube O.D.	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51524A10	MS51524B10	5/8	Not available	Not available
MS51524A10H	MS51524B10H	5/8	Not available	Not available
MS51524A10J	MS51524B10J	5/8	Not available	Not available
MS51524A10M	MS51524B10M	5/8	J514-10-10-10-070433MA	J514-10-10-10-070433MB
MS51524A10N	MS51524B10N	5/8	J514-10-10-10-070433NA	J514-10-10-10-070433NB
MS51524A10P	MS51524B10P	5/8	J514-10-10-10-070433PA	J514-10-10-10-070433PB
MS51524A10R	MS51524B10R	5/8	Not available	Not available
MS51524A10S	MS51524B10S	5/8	J514-10-10-10-070433SA	J514-10-10-10-070433SB
MS51524A10T	MS51524B10T	5/8	J514-10-10-10-070433TA	J514-10-10-10-070433TB
MS51524A10TF	MS51524B10TF	5/8	Not available	Not available
MS51524A10Z	MS51524B10Z	5/8	J514-10-10-10-070433ZA	J514-10-10-10-070433ZB
MS51524A10ZC	MS51524B10ZC	5/8	Not available	Not available
MS51524A12	MS51524B12	3/4	Not available	Not available
MS51524A12H	MS51524B12H	3/4	Not available	Not available
MS51524A12J	MS51524B12J	3/4	Not available	Not available
MS51524A12M	MS51524B12M	3/4	J514-12-12-12-070433MA	J514-12-12-12-070433MB
MS51524A12N	MS51524B12N	3/4	J514-12-12-12-070433NA	J514-12-12-12-070433NB
MS51524A12P	MS51524B12P	3/4	J514-12-12-12-070433PA	J514-12-12-12-070433PB
MS51524A12R	MS51524B12R	3/4	Not available	Not available
MS51524A12S	MS51524B12S	3/4	J514-12-12-12-070433SA	J514-12-12-12-070433SB
MS51524A12T	MS51524B12T	3/4	J514-12-12-12-070433TA	J514-12-12-12-070433TB
MS51524A12TF	MS51524B12TF	3/4	Not available	Not available
MS51524A12Z	MS51524B12Z	3/4	J514-12-12-12-070433ZA	J514-12-12-12-070433ZB
MS51524A12ZC	MS51524B12ZC	3/4	Not available	Not available
MS51524A14	MS51524B14	7/8	Not available	Not available
MS51524A14H	MS51524B14H	7/8	Not available	Not available
MS51524A14J	MS51524B14J	7/8	Not available	Not available
MS51524A14M	MS51524B14M	7/8	J514-14-14-14-070433MA	J514-14-14-14-070433MB
MS51524A14N	MS51524B14N	7/8	J514-14-14-14-070433NA	J514-14-14-14-070433NB
MS51524A14P	MS51524B14P	7/8	J514-14-14-14-070433PA	J514-14-14-14-070433PB
MS51524A14R	MS51524B14R	7/8	Not available	Not available
MS51524A14S	MS51524B14S	7/8	J514-14-14-14-070433SA	J514-14-14-14-070433SB
MS51524A14T	MS51524B14T	7/8	J514-14-14-14-070433TA	J514-14-14-14-070433TB
MS51524A14TF	MS51524B14TF	7/8	Not available	Not available
MS51524A14Z	MS51524B14Z	7/8	J514-14-14-14-070433ZA	J514-14-14-14-070433ZB
MS51524A14ZC	MS51524B14ZC	7/8	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE III. MS51524 to SAE-J514 cross reference - Continued.

Inactive for new design MS51524- PIN		Tube O.D.	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51524A16	MS51524B16	1	Not available	Not available
MS51524A16H	MS51524B16H	1	Not available	Not available
MS51524A16J	MS51524B16J	1	Not available	Not available
MS51524A16M	MS51524B16M	1	J514-16-16-16-070433MA	J514-16-16-16-070433MB
MS51524A16N	MS51524B16N	1	J514-16-16-16-070433NA	J514-16-16-16-070433NB
MS51524A16P	MS51524B16P	1	J514-16-16-16-070433PA	J514-16-16-16-070433PB
MS51524A16R	MS51524B16R	1	Not available	Not available
MS51524A16S	MS51524B16S	1	J514-16-16-16-070433SA	J514-16-16-16-070433SB
MS51524A16T	MS51524B16T	1	J514-16-16-16-070433TA	J514-16-16-16-070433TB
MS51524A16TF	MS51524B16TF	1	Not available	Not available
MS51524A16Z	MS51524B16Z	1	J514-16-16-16-070433ZA	J514-16-16-16-070433ZB
MS51524A16ZC	MS51524B16ZC	1	Not available	Not available
MS51524A20	MS51524B20	1 1/4	Not available	Not available
MS51524A20H	MS51524B20H	1 1/4	Not available	Not available
MS51524A20J	MS51524B20J	1 1/4	Not available	Not available
MS51524A20M	MS51524B20M	1 1/4	J514-20-20-20-070433MA	J514-20-20-20-070433MB
MS51524A20N	MS51524B20N	1 1/4	J514-20-20-20-070433NA	J514-20-20-20-070433NB
MS51524A20P	MS51524B20P	1 1/4	J514-20-20-20-070433PA	J514-20-20-20-070433PB
MS51524A20R	MS51524B20R	1 1/4	Not available	Not available
MS51524A20S	MS51524B20S	1 1/4	J514-20-20-20-070433SA	J514-20-20-20-070433SB
MS51524A20T	MS51524B20T	1 1/4	J514-20-20-20-070433TA	J514-20-20-20-070433TB
MS51524A20TF	MS51524B20TF	1 1/4	Not available	Not available
MS51524A20Z	MS51524B20Z	1 1/4	J514-20-20-20-070433ZA	J514-20-20 -20-070433ZB
MS51524A20ZC	MS51524B20ZC	1 1/4	Not available	Not available
MS51524A24	MS51524B24	1 1/2	Not available	Not available
MS51524A24H	MS51524B24H	1 1/2	Not available	Not available
MS51524A24J	MS51524B24J	1 1/2	Not available	Not available
MS51524A24M	MS51524B24M	1 1/2	J514-24-24-24-070433MA	J514-24-24-24-070433MB
MS51524A24N	MS51524B24N	1 1/2	J514-24-24-24-070433NA	J514-24-24-24-070433MB
MS51524A24P	MS51524B24P	1 1/2	J514-24-24-24-070433PA	J514-24-24-24-070433PB
MS51524A24R	MS51524B24R	1 1/2	Not available	Not available
MS51524A24S	MS51524B24S	1 1/2	J514-24-24-24-070433SA	J514-24-24-24-070433SB
MS51524A24T	MS51524B24T	1 1/2	J514-24-24-24-070433TA	J514-24-24-24-070433TB
MS51524A24TF	MS51524B24TF	1 1/2	Not available	Not available
MS51524A24Z	MS51524B24Z	1 1/2	J514-24-24-24-070433ZA	J514-24-24-24-070433ZB
MS51524A24ZC	MS51524B24ZC	1 1/2	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

TABLE III. MS51524 to SAE-J514 cross reference - Continued.

Inactive for new design MS51524- PIN		Tube O.D.	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51524A32	MS51524B32	2	Not available	Not available
MS51524A32H	MS51524B32H	2	Not available	Not available
MS51524A32J	MS51524B32J	2	Not available	Not available
MS51524A32M	MS51524B32M	2	J514-32-32-32-070433MA	J514-32-32-32-070433MB
MS51524A32N	MS51524B32N	2	J514-32-32-32-070433NA	J514-32-32-32-070433NB
MS51524A32P	MS51524B32P	2	J514-32-32-32-070433PA	J514-32-32-32-070433PB
MS51524A32R	MS51524B32R	2	Not available	Not available
MS51524A32S	MS51524B32S	2	J514-32-32-32-070433SA	J514-32-32-32-070433SB
MS51524A32T	MS51524B32T	2	J514-32-32-32-070433TA	J514-32-32-32-070433TB
MS51524A32TF	MS51524B32TF	2	Not available	Not available
MS51524A32Z	MS51524B32Z	2	J514-32-32-32-070433ZA	J514-32-32-32-070433ZB
MS51524A32ZC	MS51524B32ZC	2	Not available	Not available

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-18866, this document references the following:

FED-STD-595/36076	FED-STD-595/36280	ASTM B166	SAE-AMS2700
FED-STD-595/36081	FED-STD-595/36293	ASTM B564	SAE-AMS4928
FED-STD-595/36099	MIL-DTL-16232	ASTM B633	SAE-AMS5639
FED-STD-595/36118	MS51531	ASTM B695	SAE-AMS5645
FED-STD-595/36134	MS51533	ASTM F1136/F1136M	SAE-AMS5647
FED-STD-595/36152	QQ-N-281	SAE-AMS-C-81562	SAE-AMS5743
FED-STD-595/36170	ASME B1.1	SAE-AMS-QQ-P-416	SAE-AMS6370
FED-STD-595/36173	ASTM A276/A276M	SAE-AMS2417	SAE-AMS6382
FED-STD-595/36176	ASTM A564/A564M	SAE-AMS2451/5	SAE-J403
FED-STD-595/36231	ASTM A582/A582M	SAE-AMS2451/9	SAE-J425
FED-STD-595/36251	ASTM B117	SAE-AMS2486	SAE-J514
FED-STD-595/36270	ASTM B164	SAE-AMS2488	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AR
Navy - OS
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2016-024)

Review activities:
Army - AT, MI
Navy - CG, MC, SA, SH
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:05Z
Check the source to verify that this is the current version before use.