
This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation:

Form Approved
OMB No. 0704-0188

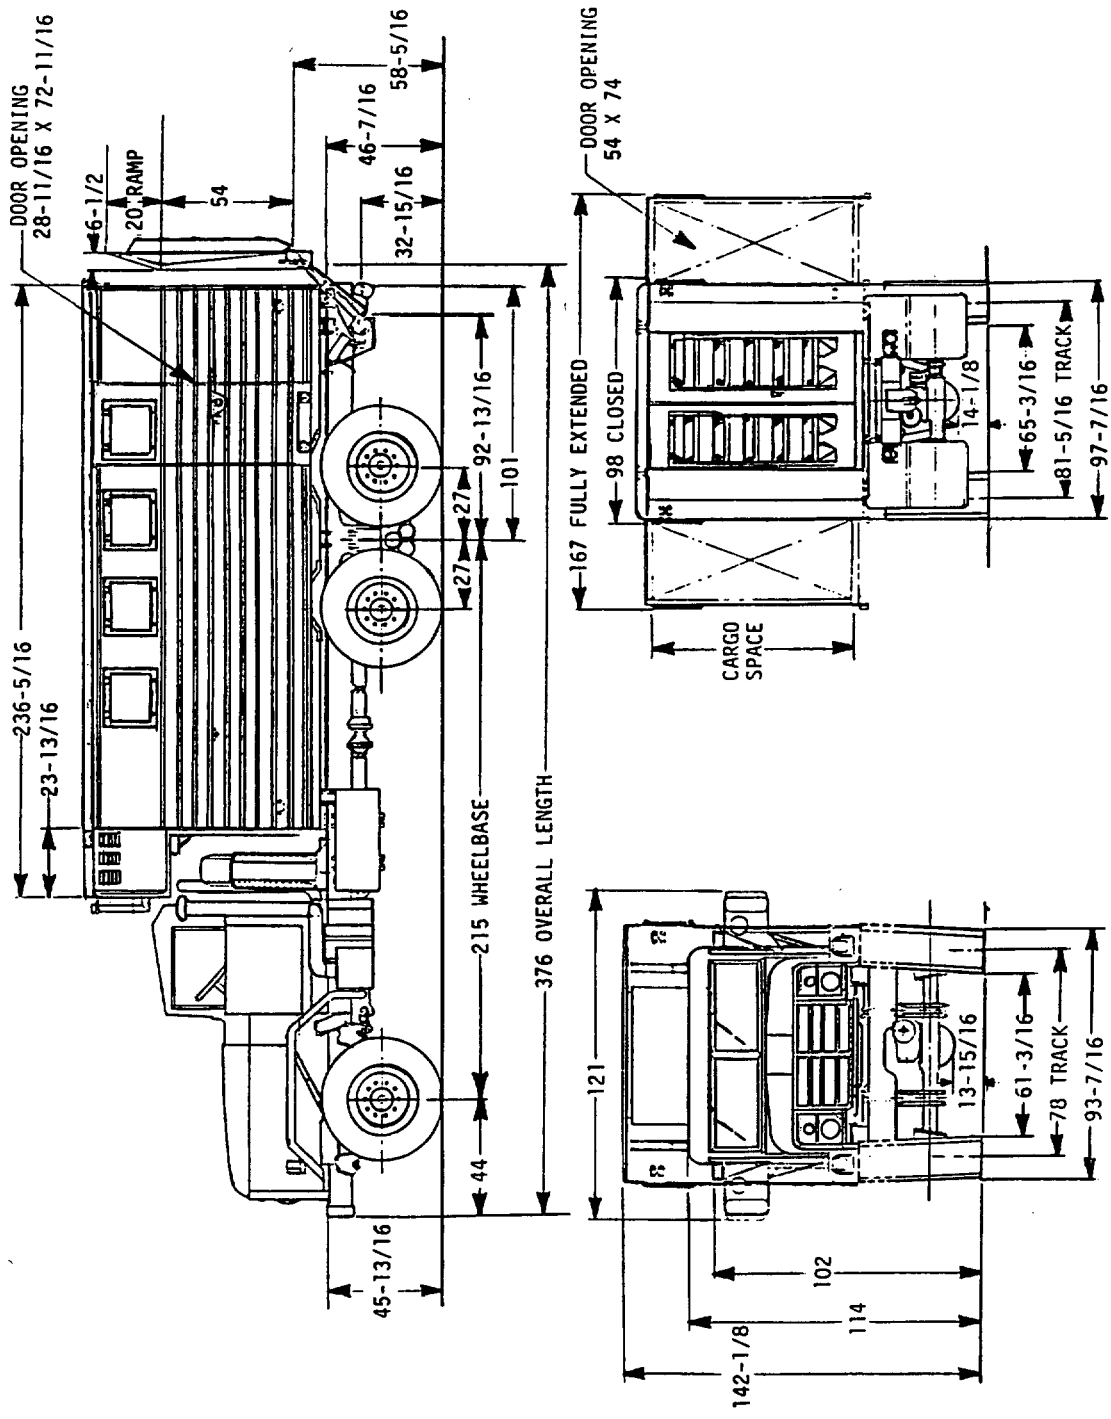


Ⓐ DENOTES CHANGES

| MS PART NO. | ENGINEERING DRAWING NO. | DESCRIPTION |
|---|---|---|
| MS52235-1 | 8750162 | LESS WINCH |

PREPARING ACTIVITY: ARMY-AT

CUSTODIANS: ARMY-AT NAVY-
AIR FORCE-

REVIEW:

USER:

PROJECT NUMBER: 2320-A387

MILITARY SPECIFICATION SHEET

TITLE: TRUCK, VAN, EXPANSIBLE, 5 TON, 6x6, M935A1

SPECIFICATION SHEET NUMBER:
MS52235A(AT) 13 JANUARY 1989

SUPERSEDING:
MS52235(AT), 4 OCTOBER 1985

AMSC-NA FSC- 2320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil - Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation:

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

## VEHICLE CHARACTERISTICS

| | |
|---|---|
| CHASSIS MODEL: | M944A1 |
| BRIDGE CLASSIFICATION (SHORT TONS): | WO/W |
| EMPTY | 12 |
| WITH PAYLOAD | 15 |
| CURB WEIGHT, FULLY EQUIPPED LESS PAYLOAD & CREW OF 3: | |
| FRONT | 10,240 LBS |
| REAR BOGIE | 21,040 LBS |
| TOTAL | 31,280 LBS |
| PAYLOAD: | 5,000 LBS |
| GROSS WEIGHT, FULLY EQUIPPED WITH PAYLOAD, LESS CREW: | |
| FRONT | 10,460 LBS |
| REAR BOGIE | 25,820 LBS |
| TOTAL | 36,280 LBS |
| (ADD 600 LBS FOR 3-MAN CREW W/EQUIPMENT) | |
| TOWED LOAD ALLOWANCE: | 15,000 LBS |
| MAXIMUM VERTICAL LOAD ON PINTLE: | 1,500 LBS |
| SHIPPING DIMENSIONS: | |
| CUBIC FEET | 3,030 |
| SQUARE FEET | 256 |

| | |
|---|---|
| CENTER OF GRAVITY: (AT CURB WEIGHT) | |
| ABOVE GROUND | 59-13/16 |
| REAR OF CENTERLINE OF FRONT AXLE | 144-5/8 |
| CENTER OF GRAVITY: ( W/PAYLOAD) | |
| ABOVE GROUND | N/A |
| REAR OF CENTERLINE OF FRONT AXLE | 153 |
| PERFORMANCE: | |
| AT GROSS WEIGHT W/O TOWED LOAD | |
| MAXIMUM SPEED | 63 MPH |
| MAXIMUM GRADE | 60 % |
| CRUISING RANGE | 350 MILES |
| AT GROSS WEIGHT W/TOWED LOAD | |
| MAXIMUM SPEED | 63 MPH |
| MAXIMUM GRADE | 60 % |
| CRUISING RANGE | 300 MILES |

BODY: EXPANSIBLE VAN 12256556-2 W/WINDOWS, AND HYDRAULIC LIFTGATE CAP. 3,000 LBS. VAN HEATED BY ONE 60,000 BTU HOT AIR HEATER 10921727 LOCATED ON LEFT SIDE OF AIR CONDITIONER IN VAN BONNET AND PROVISION FOR ONE ELECTRIC HEATER ON RIGHT SIDE. AIR CONDITIONER IS A HORIZONTAL COMPACT LIGHT WEIGHT 36,000 BTU/HR, 208V, AC, 3-PHASE POWER UNIT. 13216E6310

| MS PART NO. | ENGINEERING DRAWING NO. | DESCRIPTION |
|---|---|---|
| MS52235-1 | 8750162 | LESS WINCH |



Source: https://assist.dla.mil - Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation:

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

## VEHICLE CHARACTERISTICS - (cont'd)

| | |
|---|---|
| LENGTH: | 376 |
| WIDTH: (EXCLUDING MIRRORS) | 98 |
| HEIGHT: | |
| OVERALL | 142-1/8 |
| WITH MACHINE GUN RING MOUNT | N/A |
| REDUCIBLE TO LOWEST OPERABLE | 142-1/8 |

ENGINE (DIESEL):
240 HP AT 2100 RPM

TRANSMISSION:
AUTOMATIC; 5 FWD, 1 REV.

ELECTRICAL SYSTEM:
24 VOLT

TIRES:
14.00 x 20, 12 PLY RATING

ON-VEHICLE EQUIPMENT: (OVE)
BASIC ISSUE ITEMS 12300877
ADDITIONAL AUTHORIZATION LIST ITEMS 12300998

ACCESSORY SUPPLEMENTAL KITS: 12302863

BRAKES:
AIR

FORDING:
W/KIT 78 IN
WO/KIT 30 IN

APPROACH ANGLE: 46°

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MI. 48397-5000.

| MS PART NO. | ENGINEERING DRAWING NO. | DESCRIPTION |
|---|---|---|
| MS52235-1 | 8750162 | LESS WINCH |

PREPARING ACTIVITY: ARMY-AT
CUSTODIANS: ARMY-AT NAVY- AIR FORCE-
REVIEW:
USER:
PROJECT NUMBER: 2320-A387

MILITARY SPECIFICATION SHEET
TITLE: TRUCK, VAN, EXPANSIBLE, 5 TON, 6x6, M935A1

SPECIFICATION SHEET NUMBER:
MS52235A(AT) 13 JANUARY 1989
SUPERSEDING:
MS52235(AT), 4 OCTOBER 1985
AMSC-NA FSC- 2320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.