
RATINGS	
Style	LT11
Grade	2
Class	A
Operating temperature range	-55°C to +105°C
Ambient temperature	90°C
Temperature rise	15°C max
Power dissipation	225 mW max
Dielectric withstanding voltages:	
Sea level	1, 000 Vrms min
Reduced barometric pressure	200 Vrms min
Terminal pull	
-1 through -13	2 lb. min
-14 through -17	1 lb min
Tuning torque	005 - 2 in. oz
Stop torque	.2 in oz. max
Altitude	70, 000 feet
Weight	.25 gram max

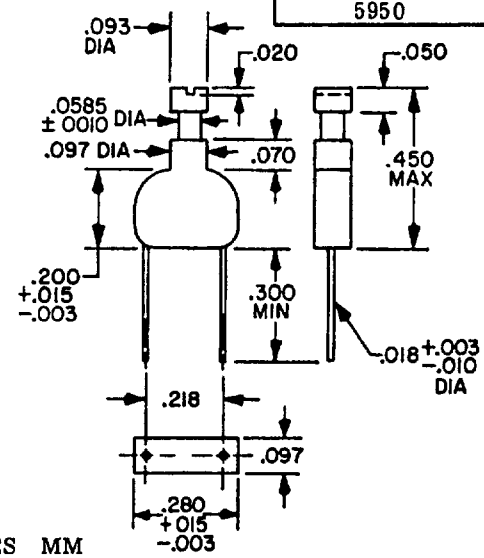

INCHES	MM	INCHES	MM
001	.03	070	1.78
003	08	093	2 36
010	25	097	2 46
015	38	.200	5.08
018	.46	218	5 54
020	.51	280	7 11
050	1 27	300	7.62
0585	1 49	.450	11 43

ELECTRICAL CHARACTERISTICS (initial)

Dash No. 1/	Type Designation	Inductance L Max. µH	Inductance L Min µH	Test Freq MHz	Q Min. at L Max.	SRF Min MHz	DC Res. at 25°C Max. Ohms	Rated Current Max. mA DC
-1	LT11V098	10.0	5.5	2 5	25	40	2.8	57
-2	099	13.0	6.5	2 5	25	35	3.0	53
-3	100	16.0	8 0	2.5	30	26	3 4	50
-4	101	20 0	10 0	2.5	30	20	3.5	43
-5	102	22.0	11 0	2 5	30	14	4.0	43
-6	103	30.0	15 0	2 5	30	10	4.5	40
-7	104	36.0	18 0	2 5	30	9	5.0	40
-8	105	47.0	24 0	2 5	30	6.5	5 7	39
-9	106	56.0	28 0	2 5	30	6 3	7.0	35
-10	107	68.0	34 0	2 5	30	6.2	8 0	30
-11	108	75.0	38 0	2 5	30	5.9	9 0	30
-12	109	86.0	43.0	2 5	30	5.6	10.0	28
-13	110	100 0	50 0	79	30	5 4	12.0	27
-14	111	120.0	60 0	79	25	4.4	14 0	25
-15	112	470.0	240.0	79	20	2.1	30.0	16
-16	113	680 0	340 0	79	20	2.0	35.0	15
-17	LT11V114	1 MH	5 MH	.79	20	1.1	75.0	11

1/ The dash number added to the MS Military Standard number constitutes the MS part number for example MS53234-1.

User activities: Army MU; Navy AS, SH, MC, OS; Air Force 19
Reviewer activities: Army MI, SG; Navy EC, OS; Air Force 11, 17, 80; DSA - ES
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use will be ... from this document

REVISED
APPROVED 18 AUG 76

P A Army - EL Other Cus AF - 85 Navy - EC	International interest	TITLE COILS, RADIO FREQUENCY, ENCAPSULATED, VARIABLE, MICRO-MINIATURE, (FERRITE CORE), TYPES LT11V098 TO LT11V114, INCL.	MILITARY STANDARD MS53234
Procurement Specification MIL-C-15305		SUPERSEDES	PAGE 1 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:22Z
Check the source to verify that this is the current version before use.

ELECTRICAL CHARACTERISTICS (final)				
Inspection group	Allowable variation from initial measurements			
	Inductance	DCR	SRF	Q
	Percent		Percent	Percent
Qualification				
Group II	±5	---	---	-10
Group III	±10	±(2% +.001 ohm)	-15	-20
Group IV	±5	±(2% +.001 ohm)	-10	-20
Quality Conformance Inspection				
Group C				
Subgroup I	±5	---	---	-10
Subgroup II	±5	±(2% +.001 ohm)	-10	-20
Subgroup III	±10	±(2% +.001 ohm)	-15	-20

NOTES:
1. Dimensions are in inches
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).
4. Lead material: -1 through -13 is .018 (.46 mm) diameter gold-plated Kovar
   -14 through -17 is .013 (.33 mm) diameter gold-plated Kovar
5. The test fixture in the diagram following shall be used for electrical measurements. Inductance values are effective inductance as indicated on a HP260A, HP190A, or equivalent Q meter, when tested in the test fixture. Add 5% to Q reading to account for loss of Q in the test jig.
6. Polarization during the moisture resistance test is not applicable.
7. Shock, specified pulse, method 213, test condition I, is applicable.
8. Coils are held rigidly by the body during vibration and mechanical shock testing
9. Barometric pressure test (test condition C) is applicable.
10. Resistance to soldering heat test, per MIL-STD-202, method 216, test condition B, is applicable.
11. For dielectric withstanding voltage, barometric pressure and insulation resistance units shall be placed on flat metal plate with leads insulated from surface. Measurement of dielectric withstanding voltage, barometric pressure and insulation resistance shall be between the leads of the coil connected together and the metal plate
12. Screw core assembly shall be set at maximum specified inductance value indicated in the electrical characteristics table (initial) prior to all inspection tests. This setting shall not be changed until electrical characteristics (final) measurements are performed
13. The marking shall be as specified in MIL-C-15305 except that the marking shall be on the unit package or container.
14. This standard takes precedence over the procurement specification referenced herein.
15. Referenced document shall be the issue in effect on the date of invitation for bid.

APPROVED 18 AUG 76
REVISED

User activities: Army MU; Navy AS, SH, MC, OS; Air Force 19
Reviewer activities: Army ML, SG; Navy EC, OS; Air Force 11, 17, 80; DSA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use will be made from this document.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:22Z
Check the source to verify that this is the current version before use.

User activities Army MU
Navy AS, SH, MC, OS
Air Force 19

Army MI, SG
Navy EC, OS
Air Force 11, 17, 80
DSA - ES

Reviewer activities

TEST FIXTURES FOR ELECTRICAL MEASUREMENTS

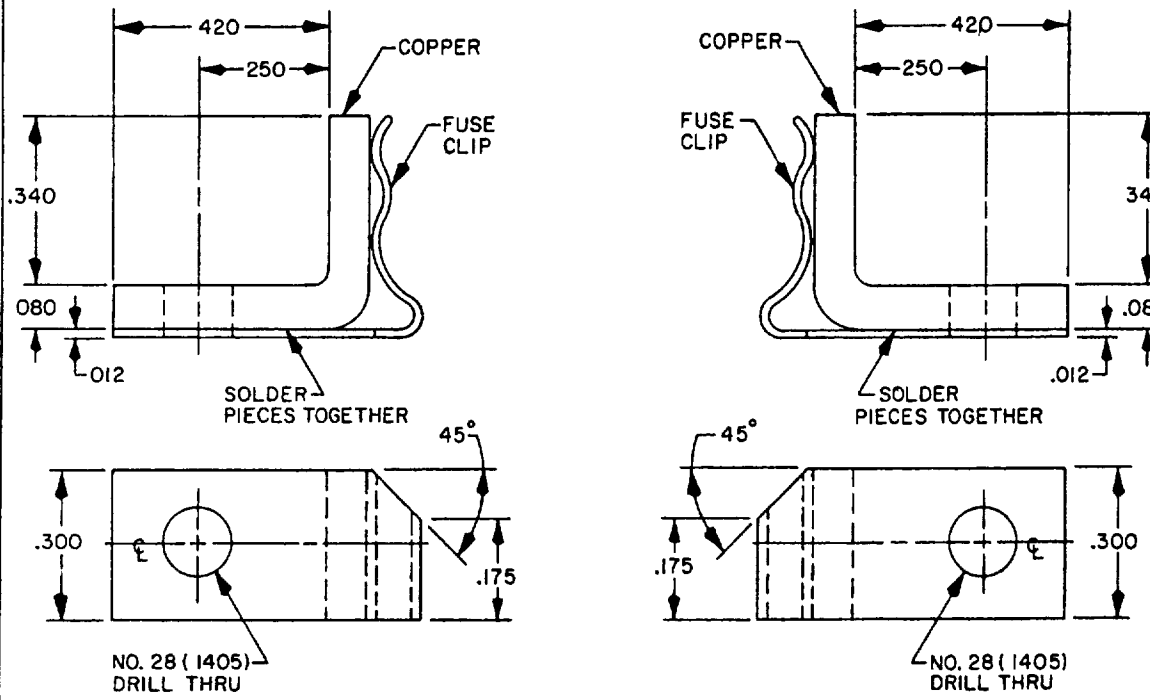

INCHES	MM
012	30
.080	2 03
.1405	3 57
175	4.45
.250	6 35
.300	7 62
.340	8.64
420	10.67

APPROVED 18 AUG 76
REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use will be governed from this document.

P A Army - EL Other Cust AF - 85 Navy - EC	International interest	TITLE COILS, RADIO FREQUENCY, ENCAPSULATED, VARIABLE, MICRO-MINIATURE, (FERRITE CORE), TYPES LT11V098 TO LT11V114, INCL.	MILITARY STANDARD MS53234
Procurement Specification MIL-C-15305		SUPERSEDES	PAGE 3 OF 3

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20261O-23T20:22Z
Check the source to verify that this is the current version before use.