
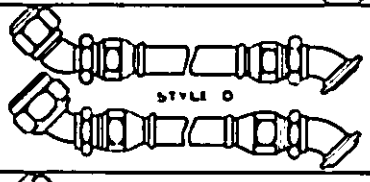
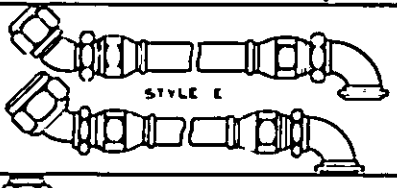
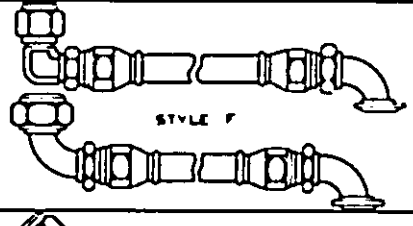
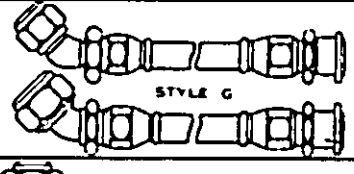
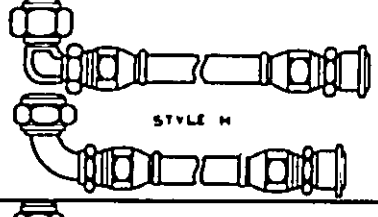
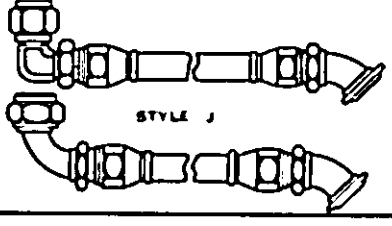
CONFIGURATION AND MATERIAL CORROSION RESISTANT STEEL (450°F)		FITTINGS ENDS (MIL-F-27272)		HOSE CUT OFF FACTOR (HCOF) MIL H 27267I INCHES VS. HOSE DASH SIZE NO.					
1	2	1	2	-8C	-10C	-12C	-16C	-20C	-24C
 STYLE A		MS27053	MS27054	2.16	2.47	2.51	2.91	3.13	3.47
 STYLE B		MS27053	MS27056	2.18	2.47	3.03	3.28	3.66	4.19
 STYLE C		MS27053	MS27058	2.14	2.46	1.05	3.35	3.78	4.34
 STYLE D		MS27059	MS27056	1.04					
		MS27053	MS27056		1.00	1.95	4.12	4.64	5.25
 STYLE E		MS27059	MS27058	1.00					
		MS27055	MS27058		2.89	3.97	4.19	4.76	5.43
 STYLE F		MS27060	MS27058	2.52					
		MS27057	MS27058		2.62	3.84	4.10	4.68	5.36
 STYLE G		MS27059	MS27054	1.02					
		MS27055	MS27054		1.00	1.43	1.75	4.11	4.56
 STYLE H		MS27060	MS27054	2.54					
		MS27057	MS27054		2.83	3.30	3.66	4.03	4.49
 STYLE J		MS27060	MS27056	2.56					
		MS27057	MS27056		2.83	3.82	4.03	4.56	5.18

EXAMPLE OF HOSE CUTOFF FACTOR:
FOR A -10, 5/8 TUBE OD, 25-1/2 ASSEMBLY LENGTH, STYLE J,
THE BULK HOSE LENGTH = 25.50 - THE HCOF = 25.50 - 2.83 = 22.67.
BULK HOSE LENGTH REQUIRED IS 22.67 INCHES.

FITTINGS TO MATE WITH PARTS DESIGNED TO MS33656 AND THE MOUNTING PAD AS SHOWN ON MS33786.

© ENTIRE STANDARD REVISED.

FED. SUP CLASS
4720

APPROVED 28 FEB 67 REVISED (A) 16 AUG 71 (B) 15 DEC 76 (C) 30 June 1983

User Activities: Army - AR, MI, Navy - SH, Air Force - DLA -

Review Activities: Army - GL, Navy - , Air Force - DLA - CS









This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MILITARY STANDARD MS 8002
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES:	SHEET 1 of 4 FSC 4720

Project No. 4720-0533

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-25113.08Z
Check the source to verify that this is the current version before use.

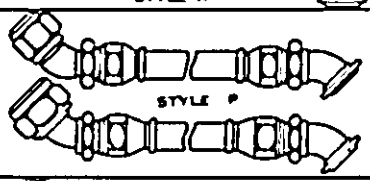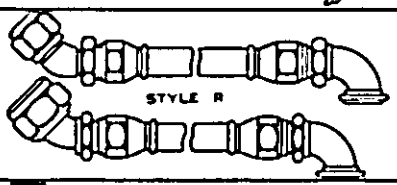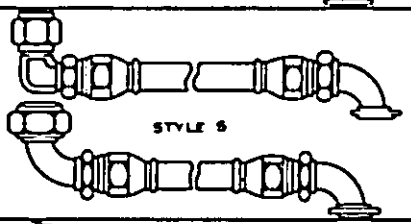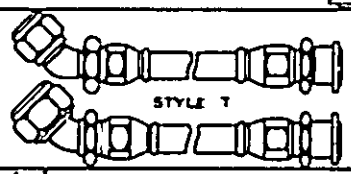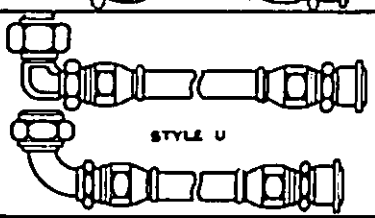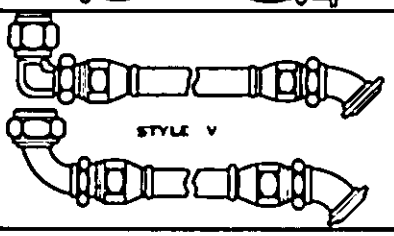CONFIGURATION AND MATERIAL COMBINATION ALUMINUM AND CORROSION RESISTANT STEEL		FITTINGS ENDS (MIL-F-27272)		HOSE CUT OFF FACTOR (HCOF) (MIL-H-27267) INCHES VS. HOSE DASH SIZE NO.					
1	2	1	2	-8	-10	-12	16	-20	-24
 STYLE K		MS27053	MS27054	2,16	2,47	2,91	2,91	3,13	3,47
 STYLE M		MS27053	MS27056	2,18	2,47	3,03	3,28	3,66	4,16
 STYLE N		MS27053	MS27058	2,14	2,46	3,05	3,35	3,78	4,34
 STYLE P		MS27059	MS27056	3,04					
		MS27055	MS27056		3,00	3,95	4,12	4,64	5,25
 STYLE R		MS27059	MS27058	3,00					
		MS27055	MS27058		2,99	3,97	4,19	4,76	5,43
 STYLE S		MS27060	MS27058	2,52					
		MS27057	MS27058		2,82	3,84	4,10	4,68	5,36
 STYLE T		MS27059	MS27054	3,02					
		MS27055	MS27054		3,00	3,43	3,75	4,11	4,96
 STYLE U		MS27060	MS27054	2,54					
		MS27057	MS27054		2,83	3,30	3,66	4,03	4,49
 STYLE V		MS27060	MS27056	2,56					
		MS27057	MS27056		2,83	3,82	4,03	4,56	5,18

FED. SUP CLASS
4720

EXAMPLE OF HOSE CUTOFF FACTOR:
FOR A -10, 5/8 TUBE OD, 25-1/2 ASSEMBLY LENGTH, STYLE V,
THE BULK HOSE LENGTH = 25.50 - THE HCOF = 25.50 - 2.83 = 22.67.
BULK HOSE LENGTH REQUIRED IS 22.67 INCHES.

FITTINGS TO MATE WITH PARTS DESIGNED TO MS33656 AND THE MOUNTING PAD AS SHOWN ON MS33786.

APPROVED 28 FEB 67 REVISED (A) 16 AUG 71 (B) 15 DEC 76 (C) 30 June 1983

User Activities: Army - AR, MI; Navy - SH; Air Force - ; DLA - ;

Review Activities: Army - GL; Navy - ; Air Force - ; DLA - CS


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.


P. A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MILITARY STANDARD MS 8002
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES:	SHEET 2 of 4 FSC 4720

Project No. 4720-0533

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4720

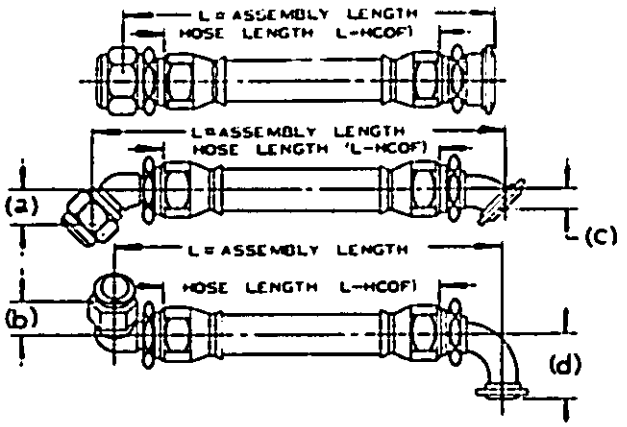

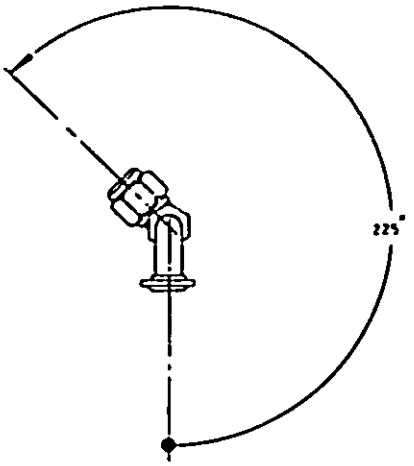

EXAMPLE OF ANGULAR ALIGNMENT OF END FITTING

DASH NO.	TUBING O.D. REF	SIZE	DROP HEIGHT OF ELBOW FITTING			
			(a)	(b)	(c)	(d)
-8	1/2	H	.485	.650	.458	.927
-10	5/8	J	.571	1.161	.610	.931
-12	3/4	K	.656	1.411	.503	1.191
-16	1	M	.695	1.535	.548	1.317
-20	1-1/4	N	.803	1.817	.684	1.535
-24	1-1/2	P	.902	2.067	.659	1.723

ANGLE BETWEEN ELBOW FITTINGS, WHEN PROJECTED ON A PLATE PERPENDICULAR TO THE HOSE AXIS SHALL BE SPECIFIED. SIGHTING ALONG THE AXIS OF THE HOSE, THE ANGLE SPECIFIED WILL BE THE ANGLE THAT THE FURTHEST ELBOW FITTING SHOULD BE ROTATED COUNTERCLOCKWISE. TOLERANCE FOR ANGULAR ALIGNMENT ± 2°.

LENGTH "L" TO BE MEASURED BETWEEN CENTER OF NIPPLE END AND CENTER OF FLANGE SEALING SURFACE ALONG A STRAIGHT LINE PARALLEL TO HOSE LENGTH WITH HOSE LAID OUT HORIZONTALLY AND STRAIGHT.

HOSE IN ACCORDANCE WITH MIL-H-27267.

HOSE ASSEMBLY TO BE SPECIFIED IN INCHES AND IN THE FOLLOWING LENGTH INCREMENTS ONLY:

UNDER 12 INCHES LONG, NOT LESS THAN 1/8 INCH INCREMENTS. TOLERANCE ± 1/8.
12 TO 18 INCHES LONG, NOT LESS THAN 1/4 INCH INCREMENTS. TOLERANCE ± 1/8.
OVER 18 INCHES LONG, NOT LESS THAN 1/2 INCH INCREMENTS.
TOLERANCE FOR LENGTHS FROM 18 TO 36 INCHES ± 1/4.
TOLERANCE FOR LENGTHS FROM 36 TO 58 INCHES ± 1/2.
TOLERANCE FOR LENGTHS OVER 58 INCHES ± 1%.

THE PART NUMBER SHALL BE FORMULATED TO REFLECT THE HOSE ASSEMBLY TUBE O.D., LENGTH, STYLE, AND ANGLE BETWEEN ELBOWS, AS APPLICABLE.

EXAMPLES OF PART NO.

MS8002H18D7-030

- HOSE ASSEMBLY FOR 1/2 INCH TUBE O.D., 18 INCHES IN LENGTH, 30° BETWEEN ELBOWS.
- ANGLE BETWEEN ELBOWS IN DEGREES (NOT REQUIRED FOR STYLES A, B, C, G, H, K, M, N, T, AND U)
- * CODE LETTER SEE BELOW
- STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEET 1)
- LENGTH IN EIGHTS (1/8) OF AN INCH
- LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES, USE 09, 08, 07, ETC.)
- SIZE H = -8 OR 1/2 INCH TUBE O.D.

MS8002J09Z8*

- HOSE ASSEMBLY FOR 5/8 INCH TUBE O.D., 9-1/4 INCHES IN LENGTH.
- * CODE LETTER SEE BELOW
- STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 AND 2)
- LENGTH IN EIGHTS (1/8) OF AN INCH
- LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES, USE 09, 08, ETC.)
- SIZE J = -10 OR 5/8 INCH TUBE O.D.

* ADD CODE LETTER AS FOLLOWS FOR ADDITIONAL FEATURES (IF REQUIRED)

USER ACTIVITIES Army - AR, MI
Navy - SH
Air Force -
DLA -

REVIEWER ACTIVITIES Army - GL
Navy -
Air Force -
DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 28 FEB 67 — REVISED (A) 16 AUG 71 (B) 15 DEC 76 (C) 30 June 1985

P. A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MILITARY STANDARD MS 8002C
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES:		SHEET 3 of 4 FSC 4720

DD FORM 672-1 (COORDINATED)

Project NO. 4720-0533

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

"A" AS1072 SLEEVE, FIRE PROTECTION, SILICONE COVERED, -65°F (-54°C) THRU +500°F (+260°C) SECURED WITH CRES BANDS AS REQUIRED.
"B" AS1073 - CODE B SLEEVE, ABRASION PROTECTION, HEAT SHRINKABLE, BLACK POLYOLEFIN, -65°F (-54°C) THRU +250°F (+121°C).
"C" AS1291 - CODE A SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS WHITE TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"D" AS1291 - CODE C SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS TRANSPARENT FEP, -65°F (-54°C) THRU +350F (+177°C) SECURED WITH CRES BANDS AS REQUIRED.
"E" AS1298 SLEEVE, HEAVY WALL CHAFE GUARD, EXTRUDED SEAMLESS BLACK TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"L" LOCKWIRE HOLE
"F" CODE A + L
"G" CODE B + L
"H" CODE C + L
"J" CODE D + L
"K" CODE E + L

NOTES:

1. IN COMBINATION CRES AND ALUMINUM FITTINGS, THE SOCKET, SLEEVE, AND RETAINER WIRE ARE CORROSION RESISTING STEEL. THE OTHER PARTS ARE ALUMINUM.
2. DIMENSIONS IN INCHES.
3. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
5. FOR DETAIL DESIGN AND SIZE OF END FITTINGS, SEE CORRESPONDING DASH NUMBER ON APPLICABLE MS DRAWING.
6. FOR "IDENTIFICATION OF PRODUCT," SEE PROCUREMENT SPECIFICATION.
7. THE CUT ENDS OF THE FIRE PROTECTION SLEEVE (CODE A) SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION TO PREVENT WICKING OF FLUIDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRE PROTECTION SLEEVE, WHICH EXPOSE THE ASBESTOS/FIBERGLASS, SHALL BE COATED WITH RTV RUBBER.

APPROVED 28 FEB 67 REVISED (A) 16 AUG 71 (B) 15 DEC 76 (C) 30 June 1983

USER ACTIVITIES Army - AR, MI
Navy - SH
Air Force -
DLA -

REVIEWER ACTIVITIES Army - CL
Navy -
Air Force -
DLA -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P. A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, DETACHABLE FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARE TO FLANGE	MILITARY STANDARD MS 8002
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES:		SHEET 4 of 4 FSC 4720

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.