MS9382 (ASG)

FED. SUP CLASS
4730

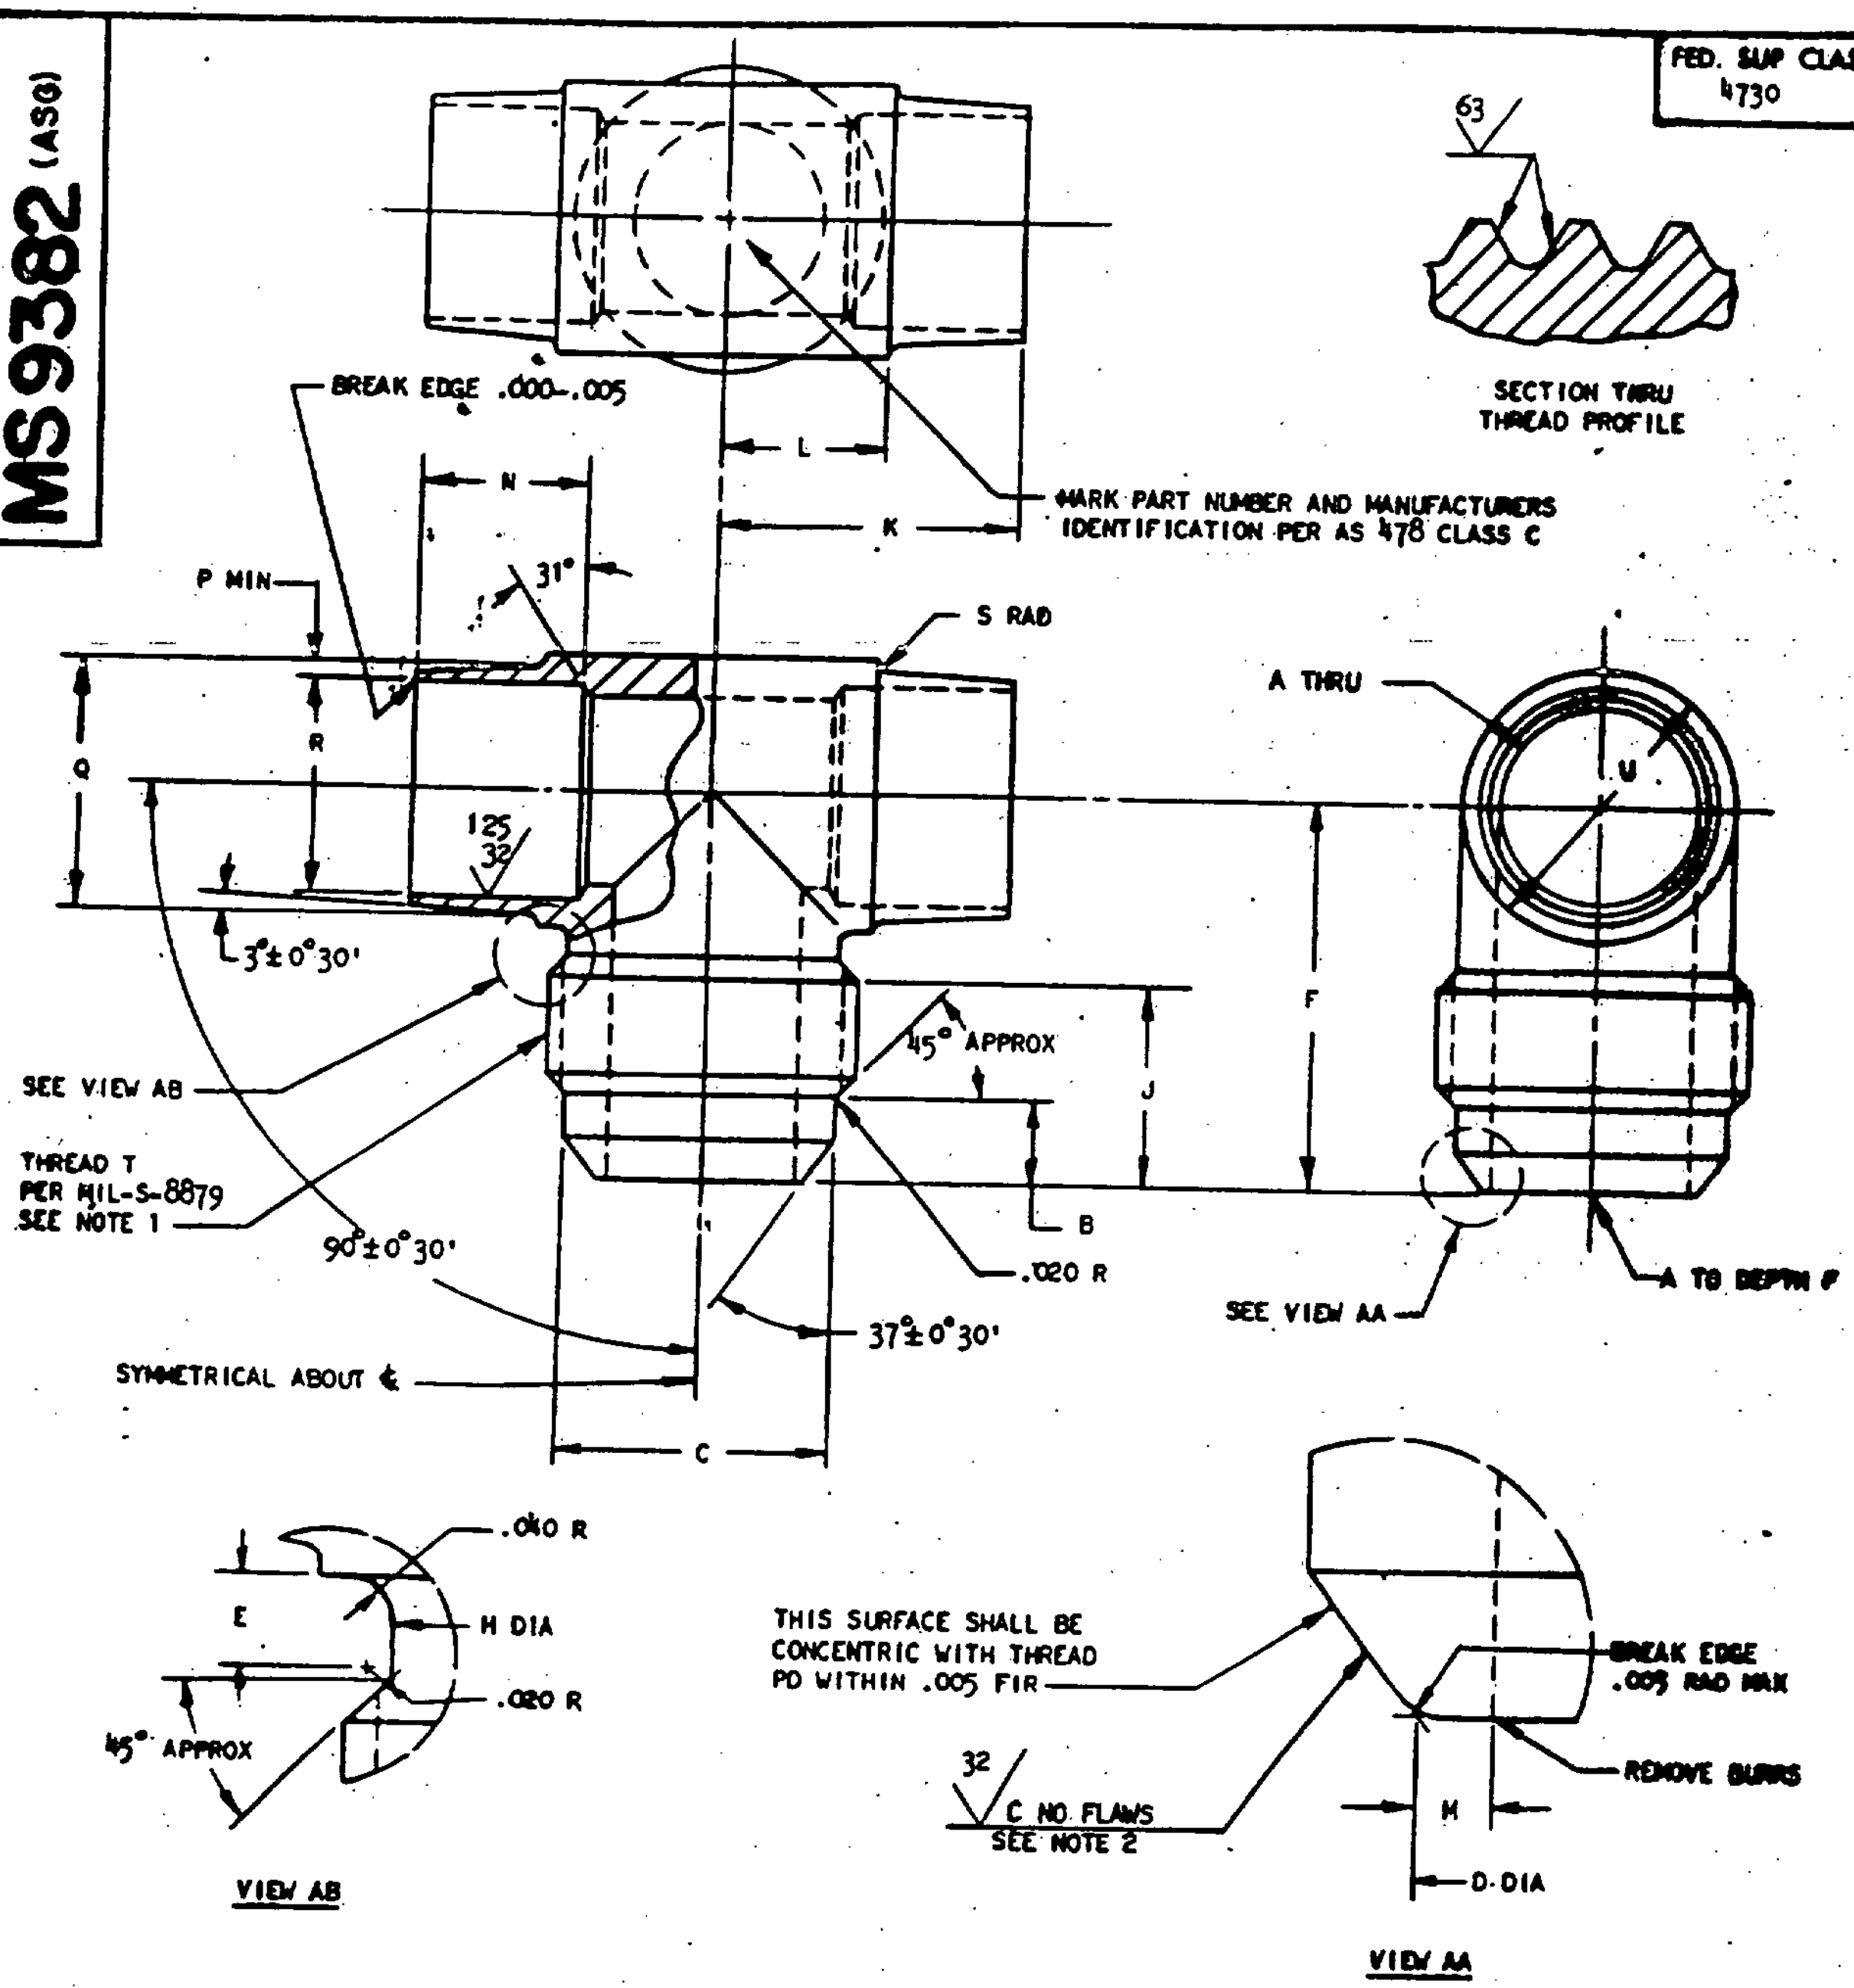

1. THREAD ON SIZES -16 AND SMALLER SHALL BE ROLLED PER AMS7472.
2. CONICAL SURFACE SHALL BE FREE OF NICKS, CHATTER MARKS OR LOW SPOTS. UNBROKEN LINE OF CONTACT TO SHOW ALL AROUND AT OTHER THAN EXTREMITIES OF SURFACE WHEN ROTATED IN CONTACT WITH 74° 0' ± 0° 1'. INCLUDED ANGLE GAGE LIGHTLY COATED BY RUBBING WITH CARBON PAPER.
3. WITH THE EXCEPTION OF DIAMETER U, ALL DIAMETERS ABOUT THEIR RESPECTIVE AXES SHALL BE CONCENTRIC WITHIN .010 FIR. DIAMETER US SHALL BE CONCENTRIC WITH DIAMETER R WITHIN .020 FIR.
4. DIMENSIONS ARE TO SHARP CORNERS UNLESS OTHERWISE SPECIFIED.
5. MATERIAL: CORROSION RESISTANT STEEL, AMS 5646, FORGING.
6. CLEANING: FINISHED PARTS SHALL BE DEGREASED AND IMMERSED FOR NOT LESS THAN 20 MINUTES IN A SOLUTION OF 1 VOLUME OF NITRIC ACID (SP GR 1.42) AND 9 VOLUMES OF WATER AT ROOM TEMPERATURE.
7. FORGING MISMATCH OF .015 PERMISSIBLE.
8. SURFACE ROUGHNESS: AS 291. UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 MICROINCHES.
9. PARTS SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
10. BREAK SHARP EDGES .003-.015, UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.

Review activities:
Navy - AS
USAF - 11

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

REVISED

APPROVED 1 Oct 66

P.A. USAF - 11 Other Cust Navy - AS	TITLE TEE, TUBE - BRAZING, AMS 5646	MILITARY STANDARD MS9382 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1 (Framed combination)

Source: https://assist.dla.mil -- Downloaded: 2024-10-23T13:16Z
Check the source to verify that this is the current version before use.

This military standard is approved by the Department of the Air Force and Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities:
Navy - AS
USAF - 11

MS9382 (ASG)

FED. SUP CLASS
4730

PART NO.	NOM TUBE OD	THREAD T SIZE	MAJOR DIA	PITCH DIA	MINOR DIA	ROOT RAD	A	B +.015 -.000	C DIA +.000 -.010	D DIA ± .003	E +.015 -.000	F
MS9382-02	.125	.3125-24UNJF-3A	.3053- .3125	.2827- .2854	.2591- .2644	.0063-.0075	.058- .065	.144	.245	.132	.063	.567
MS9382-03	.188	.375-24UNJF-3A	.3678- .3750	.3450- .3479	.3214- .3268	.0063-.0075	.121- .128	.144	.307	.195	.063	.625
MS9382-04	.250	.4375-20UNJF-3A	.4294- .4375	.4019- .4050	.3736- .3797	.0075-.0090	.168- .175	.160	.359	.242	.075	.726
MS9382-05	.312	.500-20UNJF-3A	.4919- .5000	.4643- .4675	.4360- .4422	.0075-.0090	.230- .237	.160	.421	.304	.075	.766
MS9382-06	.375	.5625-18UNJF-3A	.5538- .5625	.5230- .5264	.4916- .4983	.0083-.0100	.293- .301	.165	.476	.368	.083	.799
MS9382-07	.438	.625-18UNJF-3A	.6163- .6250	.5854- .5889	.5540- .5608	.0083-.0100	.355- .363	.165	.539	.430	.083	.833
MS9382-08	.500	.750-16UNJF-3A	.7406- .7500	.7056- .7094	.6702- .6778	.0094-.0113	.387- .395	.229	.654	.462	.094	.993
MS9382-09	.562	.8125-16UNJ-3A	.8031- .8125	.7683- .7719	.7329- .7403	.0094-.0113	.434- .442	.229	.716	.509	.094	1.028
MS9382-10	.625	.875-14UNJF-3A	.8647- .8750	.8245- .8286	.7841- .7925	.0107-.0129	.480- .488	.255	.757	.555	.107	1.163
MS9382-11	.688	1.000-12UNJF-3A	.9886-1.0000	.9415- .9459	.8944- .9038	.0125-.0150	.542- .552	.304	.875	.619	.125	1.323
MS9382-12	.750	1.0625-12UNJ-3A	1.0511-1.0625	1.0042-1.0084	.9570- .9663	.0125-.0150	.604- .614	.304	.938	.681	.125	1.354
MS9382-14	.875	1.1875-12UNJ-3A	1.1761-1.1875	1.1291-1.1334	1.0820-1.0913	.0125-.0150	.729- .739	.304	1.062	.806	.125	1.462
MS9382-16	1.000	1.3125-12UNJ-3A	1.3011-1.3125	1.2541-1.2584	1.2070-1.2163	.0125-.0150	.839- .851	.312	1.188	.918	.125	1.537
MS9382-18	1.125	1.500-12UNJF-3A	1.4886-1.5000	1.4411-1.4459	1.3940-1.4038	.0125-.0150	.948- .960	.312	1.375	1.027	.125	1.674
MS9382-20	1.250	1.625-12UNJ-3A	1.6136-1.6250	1.5665-1.5709	1.5193-1.5288	.0125-.0150	1.073-1.086	.363	1.501	1.153	.125	1.739
MS9382-24	1.500	1.875-12UNJ-3A	1.8636-1.8750	1.8164-1.8209	1.7692-1.7788	.0125-.0150	1.307-1.320	.374	1.750	1.387	.125	1.993
MS9382-28	1.750	2.250-12UNJ-3A	2.2386-2.2500	2.1914-2.1959	2.1442-2.1538	.0125-.0150	1.542-1.557	.447	2.125	1.652	.125	2.292
MS9382-32	2.000	2.500-12UNJ-3A	2.4886-2.5000	2.4413-2.4459	2.3941-2.4038	.0125-.0150	1.776-1.791	.457	2.375	1.886	.125	2.552
MS9382-40	2.500	3.000-12UNJ-3A	2.9886-3.0000	2.9412-2.9459	2.8940-2.9038	.0125-.0150	2.276-2.291	.391	2.882	2.386	.125	2.578
MS9382-48	3.000	3.500-12UNJ-3A	3.4886-3.5000	3.4411-3.4459	3.3940-3.4038	.0125-.0150	2.776-2.791	.391	3.382	2.886	.125	2.906

PART NO.	H DIA ±.015	J +.020 -.010	K	L	M MIN	N	P MIN	Q DIA +.010 -.000	R DIA +.002 -.000	S	U DIA ±.015	APPROX LB/100
MS9382-02	.240	.317	.411	.188	.030	.346	.022	.171	.115	.031-.062	.240	1.02
MS9382-03	.300	.346	.454	.219	.030	.358	.024	.236	.178	.031-.062	.300	1.62
MS9382-04	.350	.398	.502	.250	.030	.376	.027	.304	.240	.047-.078	.350	2.33
MS9382-05	.415	.398	.533	.281	.030	.376	.030	.372	.302	.047-.078	.415	3.05
MS9382-06	.470	.398	.564	.312	.030	.376	.030	.435	.365	.047-.078	.470	3.64
MS9382-07	.535	.398	.622	.344	.030	.403	.034	.506	.428	.047-.078	.535	5.54
MS9382-08	.650	.489	.705	.406	.030	.432	.035	.569	.489	.047-.078	.650	9.20
MS9382-09	.710	.489	.748	.438	.030	.451	.038	.637	.551	.047-.078	.710	11.25
MS9382-10	.765	.585	.799	.469	.030	.479	.039	.702	.614	.047-.078	.765	12.97
MS9382-11	.870	.663	.892	.531	.030	.510	.041	.768	.677	.047-.078	.870	19.20
MS9382-12	.935	.663	.923	.562	.030	.510	.041	.830	.739	.047-.078	.935	21.46
MS9382-14	1.055	.710	.986	.625	.030	.510	.041	.955	.864	.047-.078	1.055	27.03
MS9382-16	1.185	.720	1.041	.688	.030	.510	.045	1.089	.989	.078-.109	1.185	33.13
MS9382-18	1.365	.767	1.126	.781	.030	.510	.045	1.213	1.114	.078-.109	1.365	49.28
MS9382-20	1.495	.767	1.189	.844	.030	.510	.050	1.348	1.239	.078-.109	1.495	61.99
MS9382-24	1.745	.889	1.306	.969	.030	.510	.059	1.612	1.484	.078-.109	1.745	104.32
MS9382-28	2.120	1.017	1.485	1.156	.044	.510	.069	1.882	1.734	.078-.109	2.120	146.78
MS9382-32	2.370	1.142	1.602	1.281	.044	.510	.083	2.161	1.984	.078-.109	2.370	189.18
MS9382-40	2.870	.918	1.852	1.531	.044	.510	.083	2.661	2.484	.094-.125	2.870	242.80
MS9382-48	3.370	.996	2.102	1.781	.044	.510	.088	3.171	2.984	.094-.125	3.370	327.65

APPROVED 3 Oct 66 REVISED

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.

P.A. USAF - 11

Other Cust
Navy - AS

TITLE

TEE, TUBE - BRAZING, AMS 5646

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

MILITARY STANDARD

MS 9382 (ASG)

SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:16Z
Check the source to verify that this is the current version before use.