
# MS9562

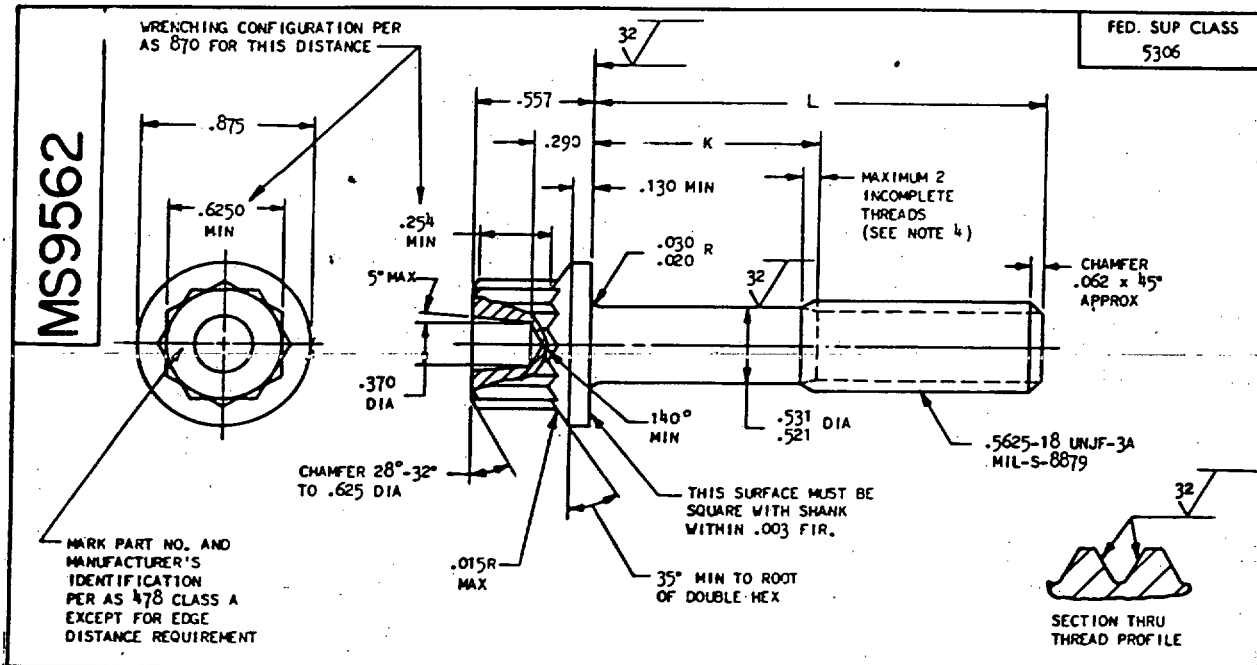


FED. SUP CLASS 5306

| PART NO. | L | K | APPROX WEIGHT LB/100 | PART NO. | L | K | APPROX WEIGHT LB/100 | PART NO. | L | K | APPROX WEIGHT LB/100 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| MS9562-04 | .875 | .113- .133 | 11.21 | MS9562-22 | 2.125 | .690- .750 | 18.21 | MS9562-40 | 4.375 | 2.940-3.000 | 30.91 |
| MS9562-05 | .938 | .113- .133 | 11.56 | MS9562-23 | 2.250 | .815- .875 | 18.93 | MS9562-41 | 4.500 | 3.065-3.125 | 31.62 |
| MS9562-06 | 1.000 | .113- .133 | 11.91 | MS9562-24 | 2.375 | .940-1.000 | 19.63 | MS9562-42 | 4.625 | 3.190-3.250 | 32.32 |
| MS9562-07 | 1.062 | .113- .133 | 12.26 | MS9562-25 | 2.500 | 1.065-1.125 | 20.34 | MS9562-43 | 4.750 | 3.315-3.375 | 33.03 |
| MS9562-08 | 1.125 | .113- .133 | 12.61 | MS9562-26 | 2.625 | 1.190-1.250 | 21.04 | MS9562-44 | 4.875 | 3.440-3.500 | 33.73 |
| MS9562-09 | 1.188 | .113- .133 | 12.96 | MS9562-27 | 2.750 | 1.315-1.375 | 21.75 | MS9562-45 | 5.000 | 3.565-3.625 | 34.44 |
| MS9562-10 | 1.250 | .113- .133 | 13.31 | MS9562-28 | 2.875 | 1.440-1.500 | 22.45 | MS9562-46 | 5.125 | 3.690-3.750 | 35.14 |
| MS9562-11 | 1.312 | .113- .133 | 13.66 | MS9562-29 | 3.000 | 1.565-1.625 | 23.16 | MS9562-47 | 5.250 | 3.815-3.875 | 35.85 |
| MS9562-12 | 1.375 | .113- .133 | 14.01 | MS9562-30 | 3.125 | 1.690-1.750 | 23.86 | MS9562-48 | 5.375 | 3.940-4.000 | 36.55 |
| MS9562-13 | 1.438 | .113- .133 | 14.36 | MS9562-31 | 3.250 | 1.815-1.875 | 24.57 | MS9562-49 | 5.500 | 4.065-4.125 | 37.26 |
| MS9562-14 | 1.500 | .113- .133 | 14.71 | MS9562-32 | 3.375 | 1.940-2.000 | 25.27 | MS9562-50 | 5.625 | 4.190-4.250 | 37.96 |
| MS9562-15 | 1.562 | .128- .188 | 15.06 | MS9562-33 | 3.500 | 2.065-2.125 | 25.98 | MS9562-51 | 5.750 | 4.315-4.375 | 38.67 |
| MS9562-16 | 1.625 | .190- .250 | 15.41 | MS9562-34 | 3.625 | 2.190-2.250 | 26.68 | MS9562-52 | 5.875 | 4.440-4.500 | 39.37 |
| MS9562-17 | 1.688 | .252- .312 | 15.76 | MS9562-35 | 3.750 | 2.315-2.375 | 27.39 | MS9562-53 | 6.000 | 4.565-4.625 | 40.08 |
| MS9562-18 | 1.750 | .315- .375 | 16.11 | MS9562-36 | 3.875 | 2.440-2.500 | 28.09 | MS9562-54 | 1.938 | .502- .562 | 17.16 |
| MS9562-19 | 1.812 | .378- .438 | 16.46 | MS9562-37 | 4.000 | 2.565-2.625 | 28.80 | | | | |
| MS9562-20 | 1.875 | .440- .500 | 16.81 | MS9562-38 | 4.125 | 2.690-2.750 | 29.50 | | | | |
| MS9562-21 | 2.000 | .565- .625 | 17.51 | MS9562-39 | 4.250 | 2.815-2.875 | 30.21 | | | | |

1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .013 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5731.
6. MANUFACTURING SPECIFICATION: AMS 7477.
7. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
8. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
9. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
10. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
11. DO NOT USE UNASSIGNED PART NUMBERS.

© REINSTATED AFTER 27 JUN 84

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 16 DEC 1965 — REVISED (A) 17 Nov 69 — (B) 21 DEC 83 — © 27 JUN 84

User activities:

Review activities:
AIR FORCE - 82
DLA - IS

© MILITARY STANDARD

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| P.A. AS © | TITLE | MILITARY STANDARD |
|---|---|---|
| Other Cust AV 99 | BOLT, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, PD SHANK, AMS 5731, .5625-18 UNJF-3A | MS9562 |
| PROCUREMENT SPECIFICATION | SUPERSEDES: | PAGE 1 OF 1 |

DD FORM 1 SEP 87 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 20260-23T13:207
Check the source to verify that this is the current version before use.

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306 - 0838