DOD-STD-35-46B(MI)

26 SEPTEMBER 1986

SUPERSEDING
DOD-STD-35-46A (MI)
15 DECEMBER 1978

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

VALVES (POWERED)

NO DELIVERABLE DATA
REQUIRED BY THIS DOCUMENT

AREA EDS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

DEPARTMENT OF THE ARMY
U.S. ARMY MATERIEL COMMAND
ALEXANDRIA, VA 22333

Valves (Powered)
Automated Engineering
Document Preparation System

DOD-STD-35-46B(MI)

1. This Military Standard is approved for use by AMC, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Command, ATTN: AMSMI-RD-SE-TD-ST, Redstone Arsenal, Alabama 35898-5270, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

FOREWORD

1. The purpose of DOD-STD-35-46B(MI) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Valves (Powered).

2. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the DOD-STD-35.

3. It is important that the procedures described in the basic document (DOD-STD-35D and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT

BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CONTENTS

			Page
paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title Index	1
	2.	REFERENCED DOCUMENTS	4
	2.1	Government Documents	4
	2.1.1	Specifications and Standards	4
	2.2	Other Publications	5
	2.3	Order of Precedence	5
	3.	DEFINITIONS	6
	4.	GENERAL REQUIREMENTS	7
	4.1	Introduction	7
	4.2	Specification Requirement Sheet (SRS)	7
	4.3	Configuration	7
	4.3.1	Dimensions	7
	4.3.2	Illustrations	7
	4.4	Units of Measure	7
	5.	DETAILED REQUIREMENTS	8
	5.1	Introduction	8
	5.2	MSE Formats	8
	5.3	Referenced Documents	8
	5.4	Test Matrix	8
	5.5	Tabulation	10
	5.6	Keyword Code Index (KCI) and Standard Paragraphs	10
	5.6.1	Interrelationship of Codes	11
	5.6.2	Automatic MSE Data	11
	5.6.3	DOD-STD-35 Table	11

TABLES

Table	I.	Title Index	2
	II.	Test Matrix	9
	III.	Tabulation Candidates	10

APPENDICES

APPENDIX	A.	Illustrations	114
	B.	Characteristic Code Index	128
		Index	134

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT

BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Valves (Powered).

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate a MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts, have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects applicable to all AEDPS dash-numbered parts and included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specification (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for a MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSES for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index and entered on a SRS, specifies that the title of the MSE will be the title shown in the Title Index.

Each MSE title, listed in the Title Index, is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference. When more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
VALVE , SOLENOID	208001	MIL-V-8610	FUEL SHUTOFF 28 VOLTS DC
		MS29527	
		MIL-V-16556	THREE-WAY BYPASS
		MIL-V-19593	PNEUMATIC 28 VOLTS DC
		MIL-V-23289	REFRIGERANT-12
		MS17841	
		MIL-V-46720	HYDRAULIC 24 VOLT
		MIL-V-62358	HYDRAULIC CONTROL
		MIL-V-62381	HYDRAULIC BYPASS
VALVE, ELECTRICAL MOTOR OPERATED	208002	MIL-V-8608	FUEL SHUTOFF
		MIL-V-27162	SERVO CONTROL
		MIL-V-81072	SERVO CONTROL
		MIL-V-82444	FUEL TANK PRESS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
VALVE, DIAPHRAGM ACTUATED	208003	MIL-V-15508	REMOTE CONTROL PILOT
		MIL-V-17501	HYDRAULIC OPER SPRINKLING
		MIL-V-18030	AIR OPERATED HYDROSTATIC

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Government Documents.

2.1.1 Specifications and Standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this standard to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-V-62381	Valve, Solenoid Operated

STANDARD

FEDERAL

FED-STD-151	Metal, Test Methods

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-461	Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-810	Environmental Test Methods and Engineering Guidelines
MIL-STD-1246	Product Cleanliness Levels and Contamination Control Program

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

MIL-STD-1275	Characteristics of 28 Volt DC Electrical Systems in Military Vehicles
MIL-STD-1523	Age Controls of Age-Sensitive Elastomeric Materials (for Aerospace Applications)
MS33540	Safety Wiring and Cotter Pinning, General Practices for

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other Publications. The following documents form a part of this standard to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the issue of the DoDISS specified in the solicitation. The issues of documents which have not been adopted shall be those in effect on the date of the cited DoDISS.

ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, PA 19103.)

(Nongovernment standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.

2.3 Order of Precedence. In the event of conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

Definitions contained in DOD-STD-35 are applicable to Valves (Powered).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare a SRS for Valves (Powered), it is necessary to use DOD-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in DOD-STD-35 are applicable to Valves (Powered).

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions, described in DOD-STD-35, are applicable to Valves (Powered).

4.3.2 Illustrations. Illustrations, applicable to Valves (Powered), are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTME380 for guidance in using SI. However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in DOD-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single-section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in DOD-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format

b. 0800 for a single-section format

5.3 Referenced Documents. Section 2 of the MSE may contain a list of all referenced documents within Sections 3, 4, and 5 of the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in DOD-STD-35.

5.4 Test Matrix. A test matrix is supplied as a guide for secting documents to specify tests (see table II). The test matrix presents documents most applicable for use to satisfy the statement "TEST PER (DOC DES)". Any document listed in the Title Index may be used to satisfy the statement. However, the selected document from the Title Index must contain the desired test. Government test method documents and approved industry standards such as ASTM test methods may also be used to satisfy the statement "TEST PER (DOC DES)".

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

TABLE II. TEST MATRIX

DOCUMENT	CODE	ACCELERATED CORROSION	ALTITUDE ENDURANCE	BURST PRESSURE	ENDURANCE	ENDURANCE, CONT. MEDIA	FLUID RESISTANCE	LEAKAGE	OPERATING TORQUE	POWER & TIME OPERATION	PRESSURE DROP	PROOF PRESSURE	TEMPERATURE, HIGH	TEMPERATURE, LOW	THERMAL RELIEF
	TEST	2353	2084	1865	2134	2231	2184	1704	1820	2317	1884	1744	1917	1964	1924
MIL-V-8608		X		X	X	X	X	X	X		X			X	X
8610		X		X	X	X	X	X			X	X	X		
15508					X			X							
16556					X			X							
17501					X			X				X			
18030								X				X			
19593				X	X					X			X	X	
27162			X	X								X	X	X	
46720		X		X	X			X		X	X	X	X	X	
62358					X			X					X	X	
62381		X		X				X				X	X	X	
MIL-V-81072					X	X		X				X			

TEST MATRIX

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

5.5 Tabulation. Instructions for tabulation are provided in DOD-STD-35. Table III provides codes for column headings which may be used for Valves (Powered) characteristics. When different units of measure are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE III. TABULATION CANDIDATES

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1009	CONFIG-URATION	1562	TYPE	1563	SIZE
1564	STYLE	1565	CLASS	1576	SOLENOIDS
1578	CONNECTORS	1580	SWITCHES	7585	OPERATING PRESSURE PSI
7586	OPERATING PRESSURE KPA	7587	MIN PROOF PRESSURE PSI	7588	MIN PROOF PRESSURE KPA
7589	MIN BURST PRESSURE PSI	7590	MIN BURST PRESSURE KPA	7597	CURRENT RATING AMPERES
7598	CURRENT RATING MILLIA	7618	RATING VOLTS AC	7619	RATING VOLTS DC
7581	OPER PRESS PSIG (MIN)	7583	OPER PRESS PSIG (MAX)	7591	CURRENT RATING AMPS (MINIMUM)
7594	CURRENT RATING AMPS (MAXIMUM)				

5.6 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on a SRS, that are unique for the type part covered by this dash-numbered part of DOD-STD-35. The left-hand page presents the information in outline form using keywords and

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

codes. The right-hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword on the KCI and it's associated code. Enter, on the SRS, the code and the characteristic value required. After the part's unique characteristics have been specified, refer to DOD-STD-35 when exceptions are required to Quality Assurance packaging, Notes, etc. Instructions are in DOD-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.6.1 Interrelationship of Codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parentheses, period or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right-hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

5.6.2 Automatic MSE Data. Some statements, such as Altitude and Temperature , will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.6.3 DOD-STD-35 Tables. The KCI of this document contains references to tables in DOD-STD-35. Refer to DOD-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S NAME	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
*REQUESTER'S FSCM	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY FSCM	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1004	USER(S) FSCM(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY FSCM 6369.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF DOD-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108.
	SCOPE.
	SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT) PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE, REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES UNLESS OTHERWISE SPECIFIED.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL, SYSTEM OF UNITS (SI) OR DEGREES UNLESS OTHERWISE SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
OPERATING PRESSURE RATING	
MINIMUM OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7581
(KILOPASCALS)	7582
MAXIMUM OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7583
(KILOPASCALS)	7584
NOMINAL OPERATING PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7585
(KILOPASCALS)	7586
PROOF PRESSURE RATING	
MINIMUM PROOF PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7587
(KILOPASCALS)	7588
BURST PRESSURE RATING	
MINIMUM BURST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH)	7589

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	OPERATING PRESSURE RATING.
7581	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 7581 POUNDS PER SQUARE INCH.
7582	THE MINIMUM OPERATING PRESSURE RATING SHALL BE 7582 KILOPASCALS.
7583	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 7583 POUNDS PER SQUARE INCH.
7584	THE MAXIMUM OPERATING PRESSURE RATING SHALL BE 7584 KILOPASCALS.
7585	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 7585 POUNDS PER SQUARE INCH.
7586	THE NOMINAL OPERATING PRESSURE RATING SHALL BE 7586 KILOPASCALS.
	PROOF PRESSURE RATING.
7587	THE MINIMUM PROOF PRESSURE RATING SHALL BE 7587 POUNDS PER SQUARE INCH.
7588	THE MINIMUM PROOF PRESSURE RATING SHALL BE 7588 KILOPASCALS.
	BURST PRESSURE RATING.
7589	THE MINIMUM BURST PRESSURE RATING SHALL BE 7589 POUNDS PER SQUARE INCH.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(KILOpASCALS)	7590
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MAXIMUM STORAGE (DEGREES CELSIUS)	7302
MAXIMUM SERVICE (DEGREES CELSIUS)	4905
MAXIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5054
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMuM NONOPERATING (DEGREES CELSIUS)	5070
MINIMUM STARAGE (DEGREES CELSIUS)	7301
MINIMUM SERVICE (DEGREES CELSIUS)	4904
MINIMUM AMBIENT OPERATING (DEGREES CELSIUS)	5052
NOMINAL OPERATING (DEGREES CELSIUS)	5046
NOMINAL STORAGE (DEGREES CELSIUS)	5048

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7590	THE MINIMUM BURST PRESSURE RATING SHALL BE 7590 KILOPASCALS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 . DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT RATING	
MINIMUM CURRENT (SELECT ONE)	
(AMPERES)	7591
(MILLIAMPERES)	7592
MAXIMUM CURRENT (SELECT ONE)	
(AMPERES)	7594
(MILLIAMPER	7595
NOMINAL CURRENT (SELECT ONE)	
(AMPERES)	7597
{MILLIAMPERES)	7598
VOLTAGE RATING	
MINMUM VOLTAGE (SELECT ONE)	
(VOLTS AC)	7600
(VOLTS DC)	7601
(VOLTS RMS)	7602
MAXIMUM VOLTAGE (SELECT ONE)	
(VOLTS AC)	7609
(VOLTS DC)	7610
(VOLTS RMS)	7611
NOMINAL VOLTAGE (SELECT ONE)	
(VOLTS AC)	7618
(VOLTS DC)	7619

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	CURRENT RATING.
7591	THE MINIMUM CURRENT RATING SHALL BE 7591 AMPERE(S).
7592	THE MINIMUM CURRENT RATING SHALL BE 7592 MILLIAMPERE(S).
7594	THE MAXIMUM CURRENT RATING SHALL BE 7594 AMPERE(S).
7595	THE MAXIMUM CURRENT RATING SHALL BE 7595 MILLIAMPERE(S).
7597	THE NOMINAL CURRENT RATING SHALL BE 7597 AMPERE(S).
7598	THE NOMINAL CURRENT RATING SHALL BE 7598 MILLIAMPERE(S).
	VOLTAGE RATING.
7600	THE MINIMUM VOLTAGE RATING SHALL BE 7600 VOLT(S) AC.
7601	THE MINIMUM VOLTAGE RATING SHALL BE 7601 VOLT(S) DC.
7602	THE MINIMUM VOLTAGE RATING SHALL BE 7602 VOLT(S) RMS.
7609	THE MAXIMUM VOLTAGE RATING SHALL BE 7609 VOLT(S) AC.
7610	THE MAXIMUM VOLTAGE RATING SHALL BE 7610 VOLT(S) DC.
7611	THE MAXIMUM VOLTAGE RATING SHALL BE 7611 VOLT(S) RMS.
7618	THE NOMINAL VOLTAGE RATING SHALL BE 7618 VOLT(S) AC.
7619	THE NOMINAL VOLTAGE RATING SHALL BE 7619 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(VOLTS RMS)	7620
FREQUENCY RATING (SELECT ONE)	
(HERTz)	7627
(MEGAHERTZ)	7628
(KILOHERTZ)	7641
CLASSIFICATION	
(TYPE)	1562
(SIZE)	1563
(STYLE)	1564
(CLASS)	1565
(COMPOSITION)	1567
RATINGS	
ELECTRICAL _____	1570
FLOW _____	1571
PRESSURE _____	1572
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7620	THE NOMINAL VOLTAGE RATING SHALL BE 7620 VOLT(S) RMS.
	FREQUENCY RATING.
7627	THE FREQUENCY RATING SHALL BE 7627 HERTZ.
7628	THE FREQUENCY RATING SHALL BE 7628 MEGAHERTZ.
7641	THE FREQUENCY RATING SHALL BE 7641 KILOHERTZ.
	CLASSIFICATION.
1562	TYPE 1562 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1563	SIZE 1563 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1564	STYLE 1564 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1565	CLASS 1565 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1567	COMPOSITION 1567 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
	RATINGS.
1570	ELECTRICAL RATING SHALL BE 1570.
1571	FLOW RATING SHALL BE 1571.
1572	PRESSURE RATING SHALL BE 1572.
	CONFIGURATION.
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*UNITS (SELECT ONE)	
INCHES.	7572
MILLIMETERS.	7577
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DoD-STD-35)	
MATERIALS (SEE TABLES VI AND VII, DoD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, DoD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION	
MEDIA ____	1575
MEDIA (DOC DES)	1566
FLOW DIRECTION (SELECT ONE)	
SINGLE DIRECTION.	1588
EITHER DIRECTION.	1590
PROVISIONS FOR MANUAL OVERRIDE.	1592
POSITION INDICATION (OPEN OR CLOSED POSITION)	1595
SOLENOIDS	
SOLENOIDS ____	1576
SOLENOIDS (DOC DES)	1577
ELECTRICAL CONNECTORS	
CONNECTORS ____	1578
CONNECTORS (DOC DES)	1598
NO INTERNAL GROUND.	1600
ELECTRICAL SWITCHES	
SWITCHES ____	1580
SWITCHES (DOC DES)	1602
THREADED PARTS SAFETY WIRED IN ACCORDANCE WITH MS33540.	1604

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN AND CONSTRUCTION.
1575	THE OPERATING MEDIA SHALL BE 1575.
1566	THE OPERATING MEDIA SHALL BE IN ACCORDANCE WITH 1566.
1588	THE VALVE SHALL BE CAPABLE OF FLOW IN A SINGLE DIRECTION.
1590	THE VALVE SHALL BE CAPABLE OF FLOW IN EITHER DIRECTION.
1592	THE VALVE SHALL HAVE PROVISIONS FOR MANUAL OVERRIDE.
1595	THE VALVE SHALL HAVE POSITION INDICATION IN THE 1595 POSITION.
	SOLENOIDS.
1576	SOLENOID(S) SHALL BE 1576.
1577	SOLENOID(S) SHALL BE IN ACCORDANCE WITH 1577.
	ELECTRICAL CONNECTORS.
1578	ELECTRICAL CONNECTOR(S) SHALL BE 1578.
1598	ELECTRICAL CONNECTOR(S) SHALL BE IN ACCORDANCE WITH 1598.
1600	THE VALVE SHALL NOT BE INTERNALLY GROUNDED.
	ELECTRICAL SWITCHES.
1580	SWITCH(S) SHALL BE 1580.
1602	SWITCH(S) SHALL BE IN ACCORDANCE WITH 1602.
1604	ALL THREADED PARTS SHALL BE SAFETY WIRED IN ACCORDANCE WITH MS33540.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MARKING AND AGE CONTROLS FOR SYNTHETIC RUBBER PARTS SHALL CONFORM TO MIL-STD-1523.	1606
VALVE CONFIGURATION	
WAY (2, 3 OR 4)	1608
*POSITION (2 OF 3)	1610
NORMALLY (0PEN) OR (CLOSED)	1582
ENERGIZING SHALL (OPEN) OR (CLOSE)	1584
PER PORT CONFIGURATION TABLE.	
PHASE VOLTAGE (SELECT ONE)	
SINGLE PHASE.	1586
THREE PHASE	1587

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1606 MARKING AND AGE CONTROL FOR ELASTOMERIC PARTS SHALL BE IN ACCORDANCE WITH MIL-STD-1523.

VALVE CONFIGURATION.

1608 THE VALVE SHALL BE A 1608 WAY,
1610 1610 POSITION VALVE.

1582 THE VALVE SHALL BE NORMALLY 1582.

1584 ENERGIZING THE POWER UNIT SHALL 1584 THE VALVE.

THE PORT CONFIGURATION SHALL BE AS SHOWN IN THE PORT CONFIGURATION TABLE.

PORT CONFIGURATION TABLE

PORT SPECIFICATION	SIZE (INCHES)	STYLE	THREAD	DESIGNATION
4350 4351	4352	4353	4354	4355
4356 4357	4358	4359	4360	4361
4362 4363	4364	4365	4366	4367
4368 4369	4370	4371	4372	4373
4374 4375	4376	4377	4378	4379
4380 4381	4382	4383	4384	4385
4386 4387	4388	4389	4390	4391
4392 4393	4394	4395	4396	4397
4398 4399	4400	4401	4402	4403
4404 4405	4406	4407	4408	4409

PHASE VOLTAGE.

1586 THE VOLTAGE SHALL BE SINGLE PHASE.

1587 THE VOLTAGE SHALL BE THREE PHASE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATED CORROSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2370
AS FOLLOWS:	2371
NO CORROSION OF ANY PART OF VALVE.	2372
NO DEGRADATION OF PERFORMANCE.	2374
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2352
PER DOCUMENT (DOC DES)	2353
IMMERSION MEDIA (NAME)	2358
SALT QUANTITY (PERCENT BY WEIGHT)	2359
TEST TEMPERATURE (DEGREES CELSIUS)	2360
HEATING AND IMMERSION CYCLES (QUANTITY)	2366
EACH CYCLE DURATION (HOURS)	2364
ALTITUDE ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2122

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2370	ACCELERATED CORROSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2370.
2371	ACCELERATED CORROSION. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2372	THERE SHALL BE NO CORROSION OF ANY PART OF THE VALVE.
2374	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
2352	ACCELERATED CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2352.
2353	ACCELERATED CORROSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2353.
2358	THE IMMERSION MEDIA SHALL BE 2358.
2359	THE VALVE SHALL BE IMMERSED IN A SOLUTION CONSISTING OF 2359 PERCENT BY WEIGHT OF SODIUM CHLORIDE IN DISTILLED WATER.
2360	THE TEST TEMPERATURE SHALL BE 2360 DEGREES CELSIUS.
2366	THERE SHALL BE 2366 HEATING AND IMMERSION CYCLES.
2364	THE DURATION OF EACH CYCLE SHALL BE 2364 HOUR(S).
2122	ALTITUDE ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2122.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2124
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2080
PER DOCUMENT (DOC DES)	2084
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	2088
(KILOPASCALS)	2117
TEST TEMPERATURE (DEGREES CELSIUS)	2094
TEST MEDIA (NAME)	2100
TEST MEDIA (DOC DES)	2102
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2104
TEST CYCLES (QUANTITY)	2110
CYCLE RATE (CYCLES PER MINUTE)	2112
SIMULATED ALTITUDE IN TEST CHAMBER (SELECT ONE)	
(FEET)	2114
(METERS)	2116

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2124	ALTITUDE ENDURANCE. THE INTERNAL LEAKAGE SHALL BE NOT GREATER THAN 2124 CUBIC CENTIMETER(S) PER MINUTE.
2080	ALTITUDE ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2080.
2084	ALTITUDE ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2084.
2088	THE TEST PRESSURE SHALL BE 2088 POUNDS PER SQUARE INCH GAGE .
2117	THE TEST PRESSURE SHALL BE 2117 KILOPASCAL(S).
2094	THE TEST TEMPERATURE SHALL BE 2094 DEGREES CELSIUS.
2100	THE TEST MEDIA SHALL BE 2100.
2102	THE TEST MEDIA SHALL CONFORM TO 2102.
2104	THE TEST MEDIA TEMPERATURE SHALL BE 2104 DEGREES CELSIUS.
2110	THERE SHALL BE 2110 TEST CYCLES.
2112	THE CYCLE RATE SHALL BE 2112 CYCLES PER MINUTE.
2114	THE TEST CHAMBER SHALL SIMULATE AN ALTITUDE OF 2114 FEET.
2116	THE TEST CHAMBER SHALL SIMULATE AN ALTITUDE OF 2116 METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
BURST PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1821
AS FOLLOWS:	1823
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1814
NO PERMANENT DEFORMATION OR RUPTURE.	1816
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1782
PER DOCUMENT (DOC DES)	1865
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	1786
(KILOPASCAM)	1897
TEST TEMPERATURE (DEGREES CELSIUS)	1792
TEST MEDIA (NAME)	1798
TEST MEDIA (DOC DES)	1800
PRESSURE HOLDING DURATION (MINUTES)	1802
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1804

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1821	BURST PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1821.
1823	BURST PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1814	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 1814 CUBIC CENTIMETER(S) PER MINUTE.
1816	THERE SHALL BE NO PERMANENT DEFORMATION OR RUPTURE.
1782	BURST PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1782.
1865	BURST PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1865.
1786	THE TEST PRESSURE SHALL BE 1786 POUNDS PER SQUARE INCH GAGE.
1897	THE TEST PRESSURE SHALL BE 1897 KILOPASCAL(S).
1792	THE TEST TEMPERATURE SHALL BE 1792 DEGREES CELSIUS.
1798	THE TEST MEDIA SHALL BE 1798.
1800	THE TEST MEDIA SHALL CONFORM TO 1800.
1802	THE PRESSURE HOLDING DURATION SHALL BE 1802 MINUTES.
1804	THE TEST MEDIA TEMPERATURE SHALL BE 1804 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CHEMICAL COMPOSITION (VALVE BODY)	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1632
PER CHEMICAL COMPOSITION TABLE.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1622
PER FED-STD-151, METHOD 111.2.	1624
SUPPLIERS CERTIFICATION OF COMPLIANCE MAY BE ACCEPTED IN LIEU OF CHEMICAL ANALYSIS TESTS TO VERIFY CONFORMANCE WITH MATERIAL SPECIFIED-	1628

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1632 CHEMICAL COMPOSITION (VALVE BODY). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1632.

CHEMICAL COMPOSITION (VALVE BODY). THE CHEMICAL COMPOSITION OF THE VALVE BODY MATERIAL SHALL BE AS SPECIFIED IN THE CHEMICAL COMPOSITION TABLE.

CHEMICAL COMPOSITION TABLE

CHEMICAL ELEMENT	PERCENT MINIMUM	PERCENT MAXIMUM
4420	4421	4422
4423	4424	4425
4426	4427	4428
4429	4430	4431
4432	4433	4434
4435	4436	4437
4438	4439	4440
4441	4442	4443
4444	4445	4446
4447	4448	4449

1622 CHEMICAL COMPOSITION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1622.

1624 CHEMICAL COMPOSITION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 111.2 OF FED-STD-151.

1628 SUPPLIERS CERTIFICATION OF COMPLIANCE MAY BE ACCEPTED IN LIEU OF CHEMICAL ANALYSIS TESTS TO VERIFY CONFORMANCE WITH MATERIAL SPECIFIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLEANLINESS	
REQUIREMENTS (SELECT' ONE)	
PER BASE DOCUMENT EXCEPT ____	2400
PER MIL-STD-1246 (LEVEL)	2402
PORTS COVERED.	2404
RETAIN FLUID FOR PRESERVATION.	2406
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2410
PER MIL-STD-1246.	2412
FILTERED TO (MICRON LEVEL)	2414
COIL CURRENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2420
MAXIMUM (AMPERES DC)	2422
MAXIMUM (AMPERES AC)	2424

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2400	CLEANLINESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2400.
2402	CLEANLINESS. THE INTERNAL CLEANLINESS SHALL CONFORM TO LEVEL 2402 OF MIL-STD-1246.
2404	PORTS SHALL BE COVERED WITH SUITABLE PLUGS.
2406	A SUFFICIENT QUANTITY OF FLUID SHALL BE RETAINED IN THE VALVE TO ASSURE PROPER PRESERVATION DURING EXTENDED STORAGE AND SHIPMENT.
2410	CLEANLINESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2410.
2412	CLEANLINESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH WITH MIL-STD-1246.
2414	FLUID SUPPLY SHALL BE FILTERED TO A 2414 MICRON LEVEL.
2420	COIL CURRENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2420.
2422	COIL CURRENT. THE COIL CURRENT SHALL BE NOT GREATER THAN 2422 AMPERE(S) DC.
2424	COIL CURRENT. THE COIL CURRENT SHALL BE NOT GREATER THAN 2424 AMPERE(S) AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT _____	2426
PER MIL-V-62381.	2428
APPLIED VOLTAGE (SELECT ONE)	
(VOLTS DC)	2430
(VOLTS AC)	2432
TEST AMBIENT TEMPERATURE (DEGREES CELSIUS)	2434
DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4908
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4906
MAXIMUM LEAKAGE (MILLIAMPERES)	4894
REMAIN WITHIN SPECIFIED TOLERANCE.	4901
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT _____	4884

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2426	COIL CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2426.
2428	COIL CURRENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-V-62381.
2430	APPLIED VOLTAGE SHALL BE 2430 VOLT(S) DC.
2432	APPLIED VOLTAGE SHALL BE 2432 VOLT(S) AC.
2434	TEST AMBIENT TEMPERATURE SHALL BE 2434 DEGREES CELSIUS.
4908	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4908.
4906	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4894	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4894 MILLIAMPERE(S).
4901	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4884	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4884.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER MIL-STD-202, METHOD 301.	6300
*ALTITUDE PER MIL-STD-202, METHOD 105	
*TEST CONDITION (LETTTER)	4886
*TEST VOLTAGE (SELECT ONE)	
(VOLTS DC)	4885
(VOLTS Ac)	4849
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	6311
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	6312
BETWEEN MUTUALLY INSULATED PARTS.	6292
BETWEEN ALL INSULATED PARTS AND GROUND.	6293
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	6294
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4859
DURATION OF VOLTAGE APPLICATION (SECONDS)	4891
MOUNTING PER DOCUMENT (DOC DES)	6280
REGULATION OF TEST VOLTAGE (PERCENT)	6308
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4900

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6300	DIELECTRIC WITHSTANDING VOLTAGE AT REDUCED BAROMETRIC PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4886	ALTITUDE SHALL BE IN ACCORDANCE WITH TEST CONDITION LETTER 4886 OF METHOD 105 OF MIL-STD-202.
4885	TEST VOLTAGE SHALL BE 4885 VOLTS DC.
4849	TEST VOLTAGE SHALL BE 4849 VOLTS AC.
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
6311	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
6312	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
6292	BETWEEN MUTUALLY INSULATED PARTS.
6293	BETWEEN ALL INSULATED PARTS AND GROUND.
6294	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4859	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 4859.
4891	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4891 SECOND(S).
6280	MOUNTING SHALL BE IN ACCORDANCE WITH 6280.
6308	REGULATION OF THE TEST VOLTAGE SHALL BE WITHIN 6308 PERCENT.
4900	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4900 KILOVOLTAMPERE (S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4902
(MILLIAMPERES)	6310
DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4874
NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.	4856
MAXIMUM LEAKAGE (MILLIAMPERES)	4875
REMAIN WITHIN SPECIFIED TOLERANCE.	4847
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4861
PER LIL-STD-202, METHOD 301.	4862
*TE VOLTAGE (SELECT ONE)	
(VOLTS DC)	4854
{VOLTS 4C)	4855

Source: https://assist.dla.mil -- Downloaded: 2026t0-23T20:57Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
4902	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4902 AMPERE(S).
6310	THE SURGE CURRENT SHALL BE NOT GREATER THAN 6310 MILLIAMPERE(S).
4874	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4874.
4856	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING, OR INSULATION BREAKDOWN.
4875	THE LEAKAGE CURRENT SHALL BE NOT GREATER THAN 4875 MILLIAMPERE(S) .
4847	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4861	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4861.
4862	DIELECTRIC WITHSTANDING VOLTAGE AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 301 OF MIL-STD-202.
4854	TEST VOLTAGE SHALL BE 4854 VOLTS DC.
4855	TEST VOLTAGE SHALL BE 4855 VOLTS AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POINTS OF VOLTAGE APPLICATION:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	4842
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	4848
BETWEEN MUTUALLY INSULATED PARTS.	4844
BETWEEN ALL INSULATED PARTS AND GROUND.	4845
BETWEEN CURRENT CARRYING PARTS AND THE CASE.	4846
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	4850
DURATION OF VOLTAGE APPLICATION (SECONDS)	4867
MOUNTING PER DOCUMENT (DOC DES)	5000
REGULATION OF TEST VOLTAGE (PERCENT)	4869
MINIMUM KILOVOLTAMPERE RATING OF VOLTAGE SOURCE (KILOVOLTAMPERES)	4870
MAXIMUM SURGE CURRENT (SELECT ONE)	
(AMPERES)	4717
(MILLIAMPERES)	4897
METHOD OF VOLTAGE CONNECTION PER DOCUMENT (DOC DES)	6267

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4842	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
4848	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
4844	BETWEEN MUTUALLY INSULATED PARTS.
4845	BETWEEN ALL INSULATED PARTS AND GROUND.
4846	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
4850	SPECIAL PREPARATION OR CONDITIONS SHALL BE IN ACCORDANCE WITH 4850.
4867	DURATION OF APPLICATION OF TEST VOLTAGE SHALL BE 4867 SECOND(S).
5000	MOUNTING SHALL BE IN ACCORDANCE WITH 5000.
4869	REGULATION OF TEST VOLTAGE SHALL BE WITHIN 4869 PERCENT.
4870	THE KILOVOLTAMPERE RATING OF HIGH VOLTAGE SOURCE SHALL BE NOT LESS THAN 4870 KILOVOLTAMPERE (S).
4717	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4717 AMPERE(S).
4897	THE SURGE CURRENT SHALL BE NOT GREATER THAN 4897 MILLIAMPERE(S).
6267	METHOD OF CONNECTION OF TEST VOLTAGE SHALL BE IN ACCORDANCE WITH 6267.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DUST	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4724
NO EVIDENCE OF PHYSICAL DAMAGE.	1510
NO EVIDENCE OF DUST PENETRATION.	4801
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4895
PER MIL-STD-810, METHOD 510.	4953
TEST SPECIMENS SHALL BE OPERATED DURING TEST STEPS (NUMBERS)	4872
*DURATION OF OPERATION (HOURS)	6299
SPECIMEN ORIENTATION SHALL BE CHANGED DURING TEST.	1539
SECOND 6-HOUR TEST IMMEDIATELY FOLLOWING TEMPERATURE STABILIZATION IN STEP 2.	4956
STEP 2 AND STEP 3 TEMPERATURE (DEGREES CELSIUS)	4840
ELECTROMAGNETIC INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2440

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4724	DUST. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4724.
1510	DUST. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4801	THERE SHALL BE NO EVIDENCE OF DUST PENETRATION.
4895	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4895.
4953	DUST. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 510 OF MIL-STD-810.
4872	ITEMS SHALL BE OPERATED DURING STEP(S) 4872.
6299	DURATION OF OPERATION SHALL BE 6299 HOUR(S).
1539	ORIENTATION SHALL BE CHANGED DURING TEST.
4956	THE SECOND 6-HOUR TEST SHALL BE PERFORMED IMMEDIATELY AFTER REACHING STABILIZATION IN STEP 2.
4840	THE TEMPERATURE SHALL BE 4840 DEGREES CELSIUS FOR STEPS 2 AND 3.
2440	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2440.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER MIL-STD-461.	2442
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2444
PER MIL-STD-462.	2446
*AS FOLLOWED:	
METHOD CE (TWO DIGITS)	2448
METHOD RE (TWO DIGITS)	2450
METHOD CS (TWO DIGITS)	2452
METHOD RS (TWO DIGITS)	2454
METHOD UM (TWO DIGITS)	2456
ENDURANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2172
AS FOLLOWS:	2171
MAXIMUM ALLOWABLE INTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2174
MAXIMUM ALLOWABLE EXTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2176

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2442	ELECTROMAGNETIC INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITS OF MIL-STD-461.
2444	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2444.
2446	ELECTROMAGNETIC INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-462. THE FOLLOWING METHOD(s) SHALL APPLY:
2448	METHOD CE 2448.
2450	METHOD RE 2450.
2452	METHOD CS 2452.
2454	METHOD RS 2454.
2456	METHOD UM 2456.
2172	ENDURANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2172.
2171	ENDURANCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2174	THE INTERNAL LEAKAGE SHALL BE NOT GREATER THAN 2174 CUBIC CENTIMETER(S) PER MINUTE.
2176	THE EXTERNAL LEAKAGE SHALL BE NOT GREATER THAN 2176 CUBIC CENTIMETER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
NO EVIDENCE OF EXCESSIVE WEAR.	2178
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2132
PER DOCUMENT (DOC DES)	2134
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	2136
(KILOPASCALS)	2139
TEST TEMPERATURE (DEGREES CELSIUS)	2142
TEST MEDIA (NAME)	2148
TEST MEDIA (DOC DES)	2150
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2152
TEST CYCLES (QUANTITY)	2158
CYCLES RATE (CYCLES PER MINUTE)	2160
MINIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	2162
(CUBIC FEET PER MINUTE)	2166
(LITERS PER MINUTE)	2167

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2178	THERE SHALL BE NO EVIDENCE OF EXCESSIVE WEAR OF ANY PART OF THE VALVE.
2132	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2132.
2134	ENDURANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2134.
2136	THE TEST PRESSURE SHALL BE 2136 POUNDS PER SQUARE INCH GAGE.
2139	THE TEST PRESSURE SHALL BE 2139 KILOPASCAL(S).
2142	THE TEST TEMPERATURE SHALL BE 2142 DEGREES CELSIUS.
2148	THE TEST MEDIA SHALL BE 2148.
2150	THE TEST MEDIA SHALL CONFORM TO 2150.
2152	THE TEST MEDIA TEMPERATURE SHALL BE 2152 DEGREES CELSIUS.
2158	THERE SHALL BE 2158 TEST CYCLES.
2160	THE CYCLE RATE SHALL BE 2160 CYCLES PER MINUTE.
2162	THE FLOW RATE SHALL BE NOT LESS THAN 2162 GALLON(S) PER MINUTE.
2166	THE FLOW RATE SHALL BE NOT LESS THAN 2166 STANDAND CUBIC FEET PER MINUTE.
2167	THE FLOW RATE SHALL BE NOT LESS THAT 2167 LITER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM FLOW RATE (SELECT ONE)	
(GALLONs PER MINUTE)	2164
(CUBIC FEET PER MINUTE)	2168
(LITERS PER MINUTE)	2169
ENDURANCE. CONTAMINATED MEDIA	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2274
AS FOLLOWS:	2282
MAXIMUM LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2276
NO DETERIORATION OF PERFORMANCE.	2278
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2232
PER DOCUMENT (DOC DES)	2231
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	2238

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2164	THE FLOW RATE SHALL BE NOT GREATER THAN 2164 GALLON(S) PER MINUTE.
2168	THE FLOW RATE SHALL BE NOT GREATER THAN 2168 STANDARD CUBIC FEET PER MINUTE.
2169	THE FLOW RATE SHALL BE NOT GREATER THAN 2169 LITER(S) PER MINUTE.
2274	ENDURANCE, CONTAMINATED MEDIA. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2274.
2282	ENDURANCE, CONTAMINATED MEDIA. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2276	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2276 CUBIC CENTIMETER(S) PER MINUTE.
2278	THERE SHALL BE NO DETERIORATION OF PERFORMANCE.
2232	ENDURANCE, CONTAMINATED MEDIA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2232.
2231	ENDURANCE, CONTAMINATED MEDIA. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2231.
2238	THE TEST PRESSURE SHALL BE 2238 POUNDS PER SQUARE INCH GAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(KILOPASCALS)	2241
TEST TEMPERATURE (DEGREES CELSIUS)	2244
TEST MEDIA (NAME)	2250
TEST MEDIA (DOC DES)	2252
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2254
TEST CYCLES (QUANTITY)	2260
CYCLE RATE (CYCLES PER MINUTE)	2262
MINIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	2264
(CUBIC FEET PER MINUTE)	2268
(LITERS PER MINUTE)	2265
MAXIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	2284
(CUBIC FEET PER MINUTE)	2286
(LITERS PER MUNUTE)	2266

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2241	THE TEST PRESSURE SHALL BE 2241 KILOPASCAL(S).
2244	THE TEST TEMPERATURE SHALL BE 2244 DEGREES CELSIUS.
2250	THE TEST MEDIA SHALL BE 2250.
2252	THE TEST MEDIA SHALL CONFORM TO 2252.
2254	THE TEST MEDIA TEMPERATURE SHALL BE 2254 DEGREES CELSIUS.
2260	THERE SHALL BE 2260 TEST CYCLES.
2262	THE CYCLE RATE SHALL BE 2262 CYCLES PER MINUTE.
2264	THE FLOW RATE SHALL BE NOT LESS THAN 2264 GALLON(S) PER MINUTE.
2268	THE FLOW RATE SHALL BE NOT LESS THAN 2268 STANDARD CUBIC FEET PER MINUTE.
2265	THE FLOW RATE SHALL BE NOT LESS THAN 2265 LITER(s) PER MINUTE.
2284	THE FLOW RATE SHALL BE NOT GREATER THAN 2284 GALLON(S) PER MINUTE.
2286	THE FLOW RATE SHALL BE NOT GREATER THAN 2286 STANDARD CUBIC FEET PER MINUTE.
2266	THE FLOW RATE SHALL BE NOT GREATER THAN 2266 LITER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER TEST CONTAMINANTS TABLE.	
EXPLOSIVE ATMOSPHERE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2344
ANY EXPLOSION WITHIN THE VALVE SHALL NOT IGNITE THE SURROUNDING EXPLOSIVE MIXTURE.	2346
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2322
PER MIL-STD-810, METHOD 511.	2324
TEST CHAMBER TEMPERATURE (DEGREES CELSIUS)	2328

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

THE CONTAMINANTS SHALL BE AS SPECIFIED THE TEST CONTAMINANTS TABLE.

TEST CONTAMINANTS TABLE

CONTAMINANT DESCRIPTION	PARTICLE SIZE (MICRONS)	PERCENTAGE	QUANTITY (GRAMS)
4460	4461	4462	4463
4464	4465	4466	4467
4468	4469	4470	4471
4472	4473	4474	4475
4476	4477	4478	4479
4480	4481	4482	4483
4484	4485	4486	4487
4488	4489	4490	4491
4492	4493	4494	4495
4496	4497	4498	4499
4500	4501	4502	4503
4504	4505	4506	4507

2344 EXPLOSIVE ATMOSPHERE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2344.

2346 EXPLOSIVE ATMOSPHERE. ANY EXPLOSION WITHIN THE VALVE SHALL NOT IGNITE THE SURROUNDING EXPLOSIVE MIXTURE.

2322 EXPLOSIVE ATMOSPHERE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2322.

2324 EXPLOSIVE ATMOSPHERE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 511 OF MIL-STD-810.

2328 THE TEST CHAMBER TEMPERATURE SHALL BE 2328 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VALVE ACTUATIONS (NUMBER)	2334
ACTUATION RATE (ACTUATIONS PER MINUTE)	2336
TEST VOLTAGE (SELECT ONE)	
(VOLTS DC)	2339
(VOLTS AC)	2340
FLUID RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2226
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2228
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2182
PER DOCUMENT (DOC DES)	2184
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	2186
(KILOPASCALS)	2195
TEST TEMPERATURE (DEGREES CELSIUS)	2192
TEST MEDIA (NAME)	2198
TEST MEDIA (DOC DES)	2200

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2334	THERE SHALL BE 2334 VALVE ACTUATIONS.
2336	THE ACTUATION RATE SHALL BE 2336 ACTUATIONS PER MINUTE.
2339	THE APPLIED VOLTAGE SHALL BE 2339 VOLTS DC.
2340	THE APPLIED VOLTAGE SHALL BE 2340 VOLTS AC.
2226	FLUID RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2226.
2228	FLUID RESISTANCE. THE LEAKAGE SHALL BE NOT GREATER THAN 2228 CUBIC CENTIMETER(S) PER MINUTE.
2182	FLUID RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2182.
2184	FLUID RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2184.
2186	THE TEST PRESSURE SHALL BE 2186 POUNDS PER SQUARE INCH GAGE.
2195	THE TEST PRESSURE SHALL BE 2195 KILOPASCAL(S).
2192	THE TEST TEMPERATURE SHALL BE 2192 DEGREES CELSIUS.
2198	THE TEST MEDIA SHALL BE 2198.
2200	THE TEST MEDIA SHALL CONFORM TO 2200.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST DURATION (HOURS)	2202
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2204
TEST CYCLES (QUANTITY)	2210
MINIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	2212
(CUBIC FEET PER MINUTE)	2223
(LITERS PER MINUTE)	2229
MAXIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	2214
(CUBIC FEET PER MINUTE)	2225
(LITERS PER MINUTE)	2230
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	2216
SECOND TEST DURATION (HOURS)	2222
FUNGUS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT	4760

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2202	THE TEST DURATION SHALL BE 2202 HOURS.
2204	THE TEST MEDIA TEMPERATURE SHALL BE 2204 DEGREES CELSIUS.
2210	THERE SHALL BE 2210 TEST CYCLES.
2212	THE FLOW RATE SHALL BE NOT LESS THAN 2212 GALLON(S) PER MINUTE.
2223	THE FLOW RATE SHALL BE NOT LESS THAN 2223 STANDARD CUBIC FEET PER MINUTE.
2229	THE FLOW RATE SHALL BE NOT LESS THAN 2229 LITER(S) PER MINUTE.
2214	THE FLOW RATE SHALL BE NOT GREATER THAN 2214 GALLON(S) PER MINUTE.
2225	THE FLOW RATE SHALL BE NOT GREATER THAN 2225 STANDARD CUBIC FEET PER MINUTE.
2230	THE FLOW RATE SHALL BE NOT GREATER THAN 2230 LITER(S) PER MINUTE.
2216	THE SECOND TEST TEMPERATURE SHALL BE 2216 DEGREES CELSIUS.
2222	THE SECOND TEST DURATION SHALL BE 2222 HOURS.
4760	FUNGUS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4760.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FUNGUS RESISTANT BY CERTIFICATION OR BY TEST.	4761
NO EVIDENCE OF FUNGUS GROWTH WHEN TESTED.	4762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4754
PER MIL-STD-810, METHOD 508.	4755
TEST PERIOD (DAYS)	4756
OPERATION DURING TEST (CYCLES PER HOUR)	2227
HOLD-IN VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	2460
AS FOLLOWS: (SELECT ONE)	2462
MINIMUM RELEASE VOLTAGE (VOLTS DC)	2464
MINIMUM RELEASE VOLTAGE (VOLTS AC)	2466

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4761	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH. THE MANUFACTURER SHALL VERIFY BY CERTIFICATION THAT ALL EXTERNAL MATERIALS ARE FUNGUS RESISTANT OR SHALL PERFORM THE FUNGUS TEST. WHEN THE FUNGUS TEST IS PERFORMED, THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4762	FUNGUS. ALL EXTERNAL MATERIALS SHALL BE NONNUTRIENT TO FUNGUS GROWTH OR SHALL BE SUITABLY TREATED TO RETARD FUNGUS GROWTH . THERE SHALL BE NO EVIDENCE OF FUNGUS GROWTH ON THE EXTERNAL SURFACES.
4754	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4754.
4755	FUNGUS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 508 OF MIL-STD-810.
4756	TEST PERIOD SHALL BE 4756 DAY(S).
2227	THE OPERATION OF THE VALVE SHALL BE 2227 CYCLE(S) PER HOUR.
2460	HOLD-IN VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2460.
2462	HOLD-IN VOLTAGE. THE ACTUATED VALVE SHALL NOT RELEASE AT VOLTAGE(S) AS FOLLOWS:
2464	THE VALVE SHALL REMAIN ACTUATED AT ALL VOLTAGES GREATER THAN 2464 VOLTS DC.
2466	THE VALVE SHALL REMAIN ACTUATED A ALL VOLTAGES GREATER THAN 2466 VOLTS AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

{CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2470
PER MIL-V-62381.	2472
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	2474
(KILOPASCALS)	2476
TEST MEDIA (NAME)	2478
TEST MEDIA (DOC DES)	2480
MINIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	2482
(CUBIC FEET PER MINUTE)	2484
(LITERS PER MINUTE)	2486
MAXIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	2488
(CUBIC FEET PER MINUTE)	2490
(LITERS PER MINUTE)	2492

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2470	HOLD-IN VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2470.
2472	HOLD-IN VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-V-62381.
2474	THE TEST PRESSURE SHALL BE 2474 POUNDS PER SQUARE INCH GAGE.
2476	THE TEST PRESSURE SHALL BE 2476 KILOPASCAL(S).
2478	THE TEST MEDIA SHALL BE 2478.
2480	THE TEST MEDIA SHALL CONFORM TO 2480.
2482	THE FLOW RATE SHALL BE NOT LESS THAN 2482 GALLON(S) PER MINUTE.
2484	THE FLOW RATE SHALL BE NOT LESS THAN 2484 STANDARD CUBIC FEET PER MINUTE.
2486	THE FLOW RATE SHALL BE NOT LESS THAN 2486 LITER(S) PER MINUTE.
2488	THE FLOW RATE SHALL BE NOT GREATER THAN 2488 GALLON(S) PER MINUTE.
2490	THE FLOW RATE SHALL BE NOT GREATER THAN 2490 STANDARD CUBIC FEET PER MINUTE.
2492	THE FLOW RATE SHALL BE NOT GREATER THAN 2492 LITER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
INITIAL ENERGIZING VOLTAGE (SELECT ONE)	
(VOLTS DC)	2494
(VOLTS AC)	2496
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
NO DEGRADATION OF PERFORMANCE.	4815
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAX MUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	4813
MAX MUM LEAKAGE AFTER DRYING (MILLIAMPERES)	4803

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2494	INITIAL ENERGIZING VOLTAGE SHALL BE 2494 VOLTS DC.
2496	INITIAL ENERGIZING VOLTAGE SHALL BE 2496 VOLTS AC.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4815	THERE SHALL BE NO DEGRADATION OF PERFORMANCE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHM(S) AT HIGH HUMIDITY,
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHM(S) AFTER DRYING.
4813	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	DC CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S) AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
*TEST CONDITION (LETTER)	4890
POLARIZING VOLTAGE (VOLTS DC)	4793
DURATION OF POLARIZING VOLTAGE APPLICATION (HOURS)	4790
POINTS OF APPLICATION OF POLARIZING VOLTAGE:	
BETWEEN MUTUALLY INSULATED PARTS.	4969
BETWEEN ALL INSULATED PARTS AND GROUND.	4970
BETWEEN CURRENT CARRYING PARTS AND CASE.	4971
BETWEEN CURRENT CARRYING PARTS AND GROUND.	6202
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206
INSULATION RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1380

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
4793	MAGNITUDE OF THE POLARIZING VOLTAGE SHALL BE 4793 VOLTS, DC.
4790	DURATION OF APPLICATION OF VOLTAGE SHALL BE 4790 HOUR(S).
	POINTS OF APPLICATION OF THE TEST VOLTAGE SHALL BE AS FOLLOWS:
4969	BETWEEN MUTUALLY INSULATED PARTS.
4970	BETWEEN ALL INSULATED PARTS AND GROUND.
4971	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
6202	BETWEEN CURRENT CARRYING PARTS AND GROUND.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.
1380	INSULATION RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1380.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
AS FOLLOWS:	6359
*MINIMUM INSULATION RESISTANCE (SELECT ONE)	
SINGLE TEST	
(MEGOHMS)	1386
MULTIPLE TEST	
*FIRST TEST (MEGOHMS)	1384
*SECOND TEST (MEGOHMS)	1387
REMAIN WITHIN SPECIFIED TOLERANCE.	1388
NO EVIDENCE OF PHYSICAL DAMAGE.	1407
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1371
PER MIL-STD-202, METHOD 302.	1511
*CONDITION (SELECT ONE)	
TEST CONDITION (LETTER)	1378
(TEST VOLTAGE (VOLTS DC)	1373
ELECTRIFICATION TIME (SECONDS)	1376
MAXIMUM MEASUREMENT ERROR AT REQUIRED VALUE (PERCENT)	1377

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6359	INSULATION RESISTANCE. THE REQUIREMENT(s) SHALL BE As FOLLOWS:
1386	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 1386 MEGOHM(S).
1384	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1384 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1387	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1387 MEGOHM(S) AT THE SECOND TEST TEMPERATURE.
1388	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1407	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1371	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1371.
1511	INSULATION RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 302 OF MIL-STD-202.
1378	TEST CONDITION LETTER 1378 SHALL APPLY.
1373	TEST POTENTIAL SHALL BE 1373 VOLTS DC.
1376	ELECTRIFICATION DURATION SHALL BE 1376 SECOND(S).
1377	THE MEASUREMENT ERROR AT THE INSULATION RESISTANCE VALUE REQUIRED SHALL BE NOT GREATER THAN 1377 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POINTS OF MEASUREMENT:	
BETWEEN TERMINATIONS TIED TOGETHER AND MOUNTING HARDWARE.	1497
BETWEEN TERMINATIONS TIED TOGETHER AND CASE.	1498
BETWEEN MUTUALLY INSULATED PARTS.	1522
BETWEEN INSULATED PARTS AND GROUND.	1523
BETWEEN CURRENT CARRYING PARTS AND THE CASE .	1524
SPECIAL PREPARATIONS OR CONDITIONS PER DOCUMENT (DOC DES)	1520
FIRST TEST TEMPERATURE (DEGREES CELSIUS)	1372
SECOND TEST TEMPERATURE (DEGREES CELSIUS)	1381
LEAKAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1631
AS FOLLOWS:	1633
MAXIMUM ALLOWABLE INTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1734
MAXIMUM ALLOWABLE EXTERNAL LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	1736

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	POINTS OF INSULATION RESISTANCE MEASUREMENT SHALL BE AS FOLLOWS:
1497	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE MOUNTING HARDWARE.
1498	BETWEEN THE TERMINATIONS TIED TOGETHER AND THE CASE.
1522	BETWEEN MUTUALLY INSULATED PARTS.
1523	BETWEEN ALL INSULATED PARTS AND GROUND.
1524	BETWEEN CURRENT CARRYING PARTS AND THE CASE.
1520	SPECIAL PREPARATIONS OR CONDITIONS SHALL BE IN ACCORDANCE WITH 1520.
1372	FIRST TEST TEMPERATURE SHALL BE 1372 DEGREES CELSIUS.
1381	SECOND TEST TEMPERATURE SHALL BE 1381 DEGREES CELSIUS.
1631	LEAKAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1631.
1633	LEAKAGE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1734	THE ALLOWABLE INTERNAL LEAKAGE SHALL BE NOT GREATER THAN 1734 CUBIC CENTIMETER(S) PER MINUTE.
1736	THE ALLOWABLE EXTERNAL LEAKAGE SHALL BE NOT GREATER THAN 1736 CUBIC CENTIMETER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1702
PER DOCUMENT (DOC DES)	1704
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	1706
(KILOPASCALS)	1715
TEST TEMPERATURE (DEGREES CELSIUS)	1712
TEST MEDIA (NAME)	1718
TEST MEDIA (DOC DES)	1720
PRESSURE HOLDING DURATION (MINUTES)	1722
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1724
OPERATING TORQUE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1862
AS FOLLOWS:	1863
MAXIMUM TORQUE (SELECT ONE)	
(POUND-INCHES)	1864
(NEWTON METERS)	1898

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1702	LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1702.
1704	LEAKAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1704.
1706	THE TEST PRESSURE SHALL BE 1706 POUNDS PER SQUARE INCH GAGE.
1715	THE TEST PRESSURE SHALL BE 1715 KILOPASCAL(S).
1712	THE TEST TEMPERATURE SHALL BE 1712 DEGREES CELSIUS.
1718	THE TEST MEDIA SHALL BE 1718.
1720	THE TEST MEDIA SHALL CONFORM TO 1720.
1722	THE PRESSURE HOLDING DURATION SHALL BE 1722 MINUTE(S).
1724	THE TEST MEDIA TEMPERATURE SHALL BE 1724 DEGREES CELSIUS.
1862	OPERATING TORQUE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1862.
1863	OPERATING TORQUE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1864	THE TORQUE SHALL BE NOT GREATER THAN 1864 POUND-INCH(S).
1898	THE TORQUE SHALL BE NOT GREATER THAN 1898 NEWTON-METER(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1822
PER DOCUMENT (DOC DES)	1820
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	1826
(KILOPASCALS)	1899
TEST TEMPERATURE (DEGREES CELSIUS)	1832
TEST MEDIA (NAME)	1838
TEST MEDIA (DOC DES)	1840
PRESSURE HOLDING DURATION (MINUTES)	1842
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1844
TEST CYCLES (QUANTITY)	1850
MINIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	1852
(CUBIC FEET PER MINUTE)	1856
(LITERS PER MINUTE)	1860

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1822	OPERATING TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE-DOCUMENT, EXCEPT 1822.
1820	OPERATING TORQUE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1820.
1826	THE TEST PRESSURE SHALL BE 1826 POUNDS PER SQUARE INCH GAGE.
1899	THE TEST PRESSURE SHALL BE 1899 KILOPASCAL(S).
1832	THE TEST TEMPERATURE SHALL BE 1832 DEGREES CELSIUS.
1838	THE TEST MEDIA SHALL BE 1838.
1840	THE TEST MEDIA SHALL CONFORM TO 1840.
1842	THE PRESSURE HOLDING DURATION SHALL BE 1842 MINUTE(S).
1844	THE TEST MEDIA TEMPERATURE SHALL BE 1844 DEGREES CELSIUS.
1850	THERE SHALL BE 1850 TEST CYCLES.
1852	THE FLOW RATE SHALL BE NOT LESS THAN 1852 GALLON(S) PER MINUTE.
1856	THE FLOW RATE SHALL BE NOT LESS THAN 1856 STANDARD CUBIC FEET PER MINUTE.
1860	THE FLOW RATE SHALL BE NOT LESS THAN 1860 LITER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MAXIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	1854
(CUBIC FEET PER MINUTE)	1858
(LITERS PER MINUTE)	1861
TEST VOLTAGE (SELECT ONE)	
(VOLTS DC)	1859
(VOLTS AC)	1904
POWER AND TIME OF OPERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2308
PER POWER AND TIME OF OPERATION TABLE.	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2283

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

1854 THE FLOW RATE SHALL BE NOT GREATER THAN 1854 GALLON(S) PER MINUTE.

1858 THE FLOW RATE SHALL BE NOT GREATER THAN 1858 STANDARD CUBIC FEET PER MINUTE.

1861 THE FLOW RATE SHALL BE NOT GREATER THAN 1861 LITER(S) PER MINUTE.

1859 THE TEST VOLTAGE SHALL BE 1859 VOLT(S) DC.

1904 THE TEST VOLTAGE SHALL BE 1904 VOLT(S) AC.

2308 POWER AND TIME OF OPERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2308.

POWER AND TIME OF OPERATION. THE REQUIREMENTS SHALL BE AS SHOWN IN THE POWER AND TIME OF OPERATION TABLE.

POWER AND TIME OF OPERATION TABLE

APPLIED VOLTAGE	NATURE OF VOLTAGE	MAXIMUM ALLOWABLE OPERATING TIME (SEC)	MAXIMUM CURRENT
4519	4520	4521	4522
4523	4524	4525	4526
4527	4528	4529	4530
4531	4532	4533	4534
4535	4536	4537	4538

2283 POWER AND TIME OF OPERATION. TESTING HALL BE PERFORMED ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2283.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER DOCUMENT (DOC DES)	2317
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	2287
(KILOPASCALS)	2291
TEST TEMPERATURE (DEGREES CELSIUS)	2292
TEST MEDIA (NAME)	2298
TEST MEDIA (DOC DES)	2300
TEST VOLTAGE (SELECT ONE)	
(VOLTS DC)	2302
(VOLTS AC)	2304
PRESSURE DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2319
AS FOLLOWS:	2321
MAXIMUM ALLOWABLE PRESSURE DROP (SELECT ONE)	
(POUNDSs PER SQUARE INCH)	2323
(KILOPASCALS)	2325

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2317	POWER AND TIME OF OPERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2317.
2287	THE TEST PRESSURE SHALL BE 2287 POUNDS PER SQUARE INCH GAGE.
2291	THE TEST PRESSURE SHALL BE 2291 KILOPASCAL(S).
2292	THE TEST TEMPERATURE SHALL BE 2292 DEGREES CELSIUS.
2298	THE TEST MEDIA SHALL BE 2298.
2300	THE TEST MEDIA SHALL CONFORM TO 2300.
2302	THE APPLIED VOLTAGE SHALL BE 2302 VOLTS DC.
2304	THE APPLIED VOLTAGE SHALL BE 2304 VOLTS AC.
2319	PRESSURE DROP. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2319.
2321	PRESSURE DROP. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2323	THE ALLOWABLE PRESSURE DROP SHALL BE NOT GREATER THAN 2323 POUND(S) PER SQUARE INCH.
2325	THE ALLOWABLE PRESSURE DROP SHALL BE NOT GREATER THAN 2325 KILOPASCAL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1882
PER DOCUMENT (DOC DES)	1884
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	1886
(KILOPASCALS)	1921
TEST TEMPERATURE (DEGREES CELSIUS)	1892
TEST MEDIA (NEME)	1903
TEST MEDIA (DOC DES)	1902
MINIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	1905
(CUBIC FEET PER MINUTE)	1906
(LITERS PER MINUTE)	1888
MAXIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	1907
(CUBIC FEET PER MINUTE)	1908
(LITERS PER MINUTE)	1920

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1882	PRESSURE DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1882.
1884	PRESSURE DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1884.
1886	THE TEST PRESSURE SHALL BE 1886 POUNDS PER SQUARE INCH GAGE l
1921	THE TEST PRESSURE SHALL BE 1921 KILOPASCAL(S).
1892	THE TEST TEMPERATURE SHALL BE 1892 DEGREES CELSIUS.
1903	THE TEST MEDIA SHALL BE 1903.
1902	THE TEST MEDIA SHALL CONFORM TO 1902.
1905	THE FLOW RATE SHALL BE NOT LESS THAN 1905 GALLON(S) PER MINUTE.
1906	THE FLOW RATE SHALL BE NOT LESS THAN 1906 STANDARD CUBIC FEET PER MINUTE.
1888	THE FLOW RATE SHALL BE NOT LESS THAN 1888 LITER(S) PER MINUTE.
1907	THE FLOW RATE SHALL BE NOT GREATER THAN 1907 GALLON(S) PER MINUTE.
1908	THE FLOW RATE SHALL BE NOT GREATER THAN 1908 STANDARD CUBIC FEET PER MINUTE.
1920	THE FLOW RATE SHALL BE NOT GREATER THAN 1920 LITER(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PROOF PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1909
AS FOLLOWS:	1910
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE	1776
NO PERMANENT DEFORMATION OF ANY PART.	1778
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1742
PER DOCUMENT (DOC DES)	1744
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	1746
(KILOPASCALS)	1911
TEST TEMPERATURE (DEGREES CELSIUS)	1752
TEST MEDIA (NAME)	1760
TEST MEDIA (DOC DES)	1762
PRESSURE HOLDING DURATIONN (MINUTE)	1764
TEST MEDIA TEMPERATURE (DEGREES CELSUIS)	1766

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1909	PROOF PRESSURE. THE REQUIREMENT(S) SHALL BE IN Accordance WITH THE BASE DOCUMENT, EXCEPT 1909.
1910	PROOF PRESSURE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1776	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 1776 CUBIC CENTIMETER(S) PER MINUTE.
1778	THERE SHALL BE NO PERMANENT DEFORMATION OF ANY PART.
1742	PROOF PRESSURE. TESTING SHALL BE PERFORMED IN ACCORDDANCE WITH THE BASE DOCUMENT, EXCEPT 1742.
1744	PROOF PRESSURE.TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1744.
1746	THE TEST PRESSURE SHALL BE 1746 POUNDS PER SQUARE INCH GAGE.
1911	THE TEST PRESSURE SHALL BE 1911 KILOPASCAL(S).
1752	THE TEST TEMPERATURE SHALL BE 1752 DEGREES CELSIUS.
1760	THE TEST MEDIA SHALL BE 1760.
1762	THE TEST MEDIA SHALL CONFORM TO 1762.
1764	THE PRESSURE HOLDING DURATION SHALL BE 1764 MINUTES.
1766	THE TEST MEDIA TEMPERATURE SHALL BE 1766 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PULL-IN VOLTAGE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2500
AS FOLLOWS:	2502
MINIMUM ACTUATION VOLTAGE (SELECT ONE)	
(VOLTS DC)	2504
(VOLTS AC)	2506
MAXIMUM REQUIRED VOLTAGE (SELECT ONE)	
(VOLTS DC)	2508
(VOLTS AC)	2510
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2520
PER MIL-V-62381.	2522
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	2524
(KILOPASCALS)	2526
TEST MEDIA (NAME)	2528

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2500	PULL-IN VOLTAGE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2500.
2502	PULL-IN VOLTAGE. THE VALVE SHALL ACTUATE AT VOLTAGE(S) AS FOLLOWS:
2504	THE VALVE SHALL ACTUATE AT ANY VOLTAGE GREATER THAN 2504 VOLTS DC.
2506	THE VALVE SHALL ACTUATE AT ANY VOLTAGE GREATER THAN 2506 VOLTS AC.
2508	THE MAXIMUM REQUIRED ACTUATION VOLTAGE SHALL BE 2508 VOLTS DC.
2510	THE MAXIMUM REQUIRED ACTUATION VOLTAGE SHALL BE 2510 VOLTS AC.
2520	PULL-IN VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2520.
2522	PULL-IN VOLTAGE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-V-62381.
2524	THE TEST PRESSURE SHALL BE 2524 POUNDS PER SQUARE INCH GAGE.
2526	THE TEST PRESSURE SHALL BE 2526 KILOPASCAIJ(S).
2528	THE TEST MEDIA SHALL BE 2528.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST MEDIA (DOC DES)	2530
MINIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	2532
(CUBIC FEET PER MINUTE)	2534
(LITERS PER MINUTE)	2536
MAXIMUM FLOW RATE (SELECT ONT)	
(GALLONS PER MINUTE)	2538
(CUBIC FEET PER MINUTE)	2540
(LTERS PER MINUTE)	2542
VerifICATION VOLTAGE (SELECT ONE)	
(VOLTS DC)	2544
(VOLTS AC)	2546
SALT FOG	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4998
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.	4999

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2530	THE TEST MEDIA SHALL CONFORM TO 2530.
2532	THE FLOW RATE SHALL BE NOT LESS THAN 2532 GALLON(S) PER MINUTE.
2534	THE FLOW RATE SHALL BE NOT LESS THAN 2534 STANDARD CUBIC FEET PER MINUTE.
2536	THE FLOW RATE SHALL BE NOT LESS THAN 2536 LITER(S) PER MINUTE.
2538	THE FLOW RATE SHALL BE NOT GREATER THAN 2538 GALLON(S) PER MINUTE.
2540	THE FLOW RATE SHALL BE NOT GREATER THAN 2540 STANDARD CUBIC FEET PER MINUTE.
2542	THE FLOW RATE SHALL BE NOT GREATER THAN 2542 LITER(S) PER MINUTE.
2544	VERIFICATION VOLTAGE SHALL BE 2544 VOLT(S) DC.
2546	VERIFICATION VOLTAGE SHALL BE 2546 VOLT(S) AC.
4998	SALT FOG. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4998.
4999	SALT FOG. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4779
PER MIL-STD-810, METHOD 509.	4780
SALT SOLUTION (PERCENT)	4786
EXPOSURE PERIOD (HOURS)	4783
DRYING PERIOD (HOURS)	4775
OPERATE (SELECT ONE)	
OPERATE ONLY AFTER DRYING.	6245
OPERATE ONLY AFTER EXPOSURE.	6246
OPERATE AFTER EXPOSURE AND AFTER DRYING.	6247
OPERATE AFTER 24 HOURS OF EXPOSURE.	6248
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7315
NO EVIDENCE OF PHYSICAL DAMAGE.	7316
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1551
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	7311

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4779	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4779.
4780	SALT FOG. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 509 OF MIL-STD-810.
4786	SOLUTION SHALL BE 4786 PERCENT SALT.
4783	DURATION OF THE TEST SHALL BE 4783 HOUR(S).
4775	DRYING PERIOD SHALL BE 4775 HOUR(S).
6245	ITEM(S) SHALL BE OPERATED ONLY AFTER DRYING.
6246	ITEM(S) SHALL BE OPERATED ONLY AFTER EXPOSURE.
6247	ITEM(S) SHALL BE OPERATED AFTER EXPOSURE AND AFTER DRYING.
6248	ITEM(S) SHALL BE OPERATED AFTER 24 HOURS OF EXPOSURE.
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.
7316	SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1551	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
PER MIL-STD-810, METHOD 516	7312
*PROCEDURE	
PROCEDURE I.	7313
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	7317
FIGURE 516-2 APPLIES.	7318
*AMPLITUDE, A OR B (LETTER)	7305
*DURATION, C OR D (LETTER)	7306
PROCEDURE II.	6327
PROCEDURE III.	6338
*FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6339
FIGURE 516-2 APPLIES.	6340
*AMPLITUDE A OR B (LETTER)	6341
*DURATION C 0R D (LETTER)	6342
PROCEDURE IV.	6343
*FIGURE (SELCET ONE)	
FIGURE 516-1 APPLIES.	6344

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T20:57Z
Check the source to verify that this is the currentversion before use.

CHAR CODE	STANDARD PARAGRAPH
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 516 OF MIL-STD-810.
7313	PROCEDURE NUMBER I SHALL APPLY.
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
7318	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY.
6339	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6340	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6341	AMPLITUDE LETTER 6341 SHALL APPLY.
6342	DURATION LETTER 6342 SHALL APPLY.
6343	PROCEDURE NUMBER IV SHALL APPLY.
6344	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FIGURE 516-2 APPLIES.	6345
*AMPLITUDE, A OR B (LETTER)	6346
*DURATION, C OR D (LETTER)	6347
PROCEDURE V.	6348
PROCEDURE VI.	6349
TEST TEMPERATURE (DEGREES CELSIUS)	7307
OPERATION DURING TEST REQUIRED.	7309
PERCENT RATED LOAD APPLIED (PERCENT)	6204
MONITOR PER METHOD 310 OF MIL-STD-202.	
*TEST CIRCUIT (LETTER)	1503
*TEST CONDITION (LETTER)	1499
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1915
AS FOLLOWS:	1916
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2074
MAXIMUM ALLOWABLE OPERATING TIME (SECONDS)	2076

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6345	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.
6348	PROCEDURE NUMBER V SHALL APPLY.
6349	PROCEDURE NUMBER VI SHALL APPLY.
7307	THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS.
7309	OPERATION DURING THE TEST IS REQUIRED.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
1503	MONITORING DURING TEST SHALL BE IN ACCORDANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT 1503 SHALL APPLY.
1499	TEST CONDITION LETTER 1499 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
1915	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1915.
1916	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2074	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2074 CUBIC CENTIMETER(S) PER MINUTE.
2076	THE OPERATING TIME SHALL BE NOT GREATER THAN 2076 SECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2022
PER DOCUMENT (DOC DES)	1917
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	2028
(KILOPASCALS)	1918
TEST TEMPERATURE (DEGREES CELSIUS)	2034
TEST MEDIA (NAME)	1925
TEST MEDIA (DOC DES)	1933
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	2044
TEST CYCLES (QUANTITY)	2050
MINIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	2052
(CUBIC FEET PER MINUTE)	2056
(LITERS PER MINUTE)	2057
MAXIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	2054

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2022	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2022.
1917	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1917.
2028	THE TEST PRESSURE SHALL BE 2028 POUNDS PER SQUARE INCH GAGE.
1918	THE TEST PRESSURE SHALL BE 1918 KILOPASCAL(S).
2034	THE TEST TEMPERATURE SHALL BE 2034 DEGREES CELSIUS.
1925	THE TEST MEDIA SHALL BE 1925.
1933	THE TEST MEDIA SHALL CONFORM TO 1933.
2044	THE TEST MEDIA TEMPERATURE SHALL BE 2044 DEGREES CELSIUS.
2050	THERE SHALL BE 2050 TEST CYCLES.
2052	THE FLOW RATE SHALL BE NOT LESS THAN 2052 GALLON(S) PER MINUTE.
2056	THE FLOW RATE SHALL BE NOT LESS THAN 2056 STANDARD CUBIC FEET PER MINUTE.
2057	THE FLOW RATE SHALL BE NOT LESS THAN 2057 LITER(S) PER MINUTE.
2054	THE FLOW RATE SHALL BE NOT GREATER THAN 2054 GALLON(S) PER MINUTE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(CUBIC FEET PER MINUTE)	2058
(LITERS PER MINUTE)	2060
TEST VOLTAGE (SELECT ONE)	
(VOLTS DC)	2062
(VOLTS AC)	2064
TEMPERATURE. LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2006
AS FOLLOWS:	1935
MAXIMUM ALLOWABLE LEAKAGE (CUBIC CENTIMETERS PER MINUTE)	2008
MAXIMUM ALLOWABLE OPERATING TIME (SECONDS)	2010
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1962
PER DOCUMENT (DOC DES)	1964
TEST PRESSURE (SELECT ONE)	
POUNDS PER SQUARE INCH GAGE)	1966

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2058	THE FLOW RATE SHALL BE NOT GREATER THAN 2058 STANDARD CUBIC FEET PER MINUTE.
2060	THE FLOW RATE SHALL BE NOT GREATER THAN 2060 LITER(S) PER MINUTE.
2062	THE APPLIED VOLTAGE SHALL BE 2062 VOLTS DC.
2064	THE APPLIED VOLTAGE SHALL BE 2064 VOLTS AC.
2006	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2006.
1935	TEMPERATURE, LOW. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2008	THE ALLOWABLE LEAKAGE SHALL BE NOT GREATER THAN 2008 CUBIC CENTIMETER(S) PER MINUTE.
2010	THE OPERATING TIME SHALL BE NOT GREATER THAN 2010 SECOND(S).
1962	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1962.
1964	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1964.
1966	THE TEST PRESSURE SHALL BE 1966 POUNDS PER SQUARE INCH GAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
(KILOPASCALS)	1959
TEST MEDIA (NAME)	1975
TEST MEDIA (DOC DES)	1980
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1982
TEST CYCLES (QUANTITY)	1988
MINIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	1965
(CUBIC FEET PER MINUTE)	1994
(LITERS PER MINUTE)	1995
MAXIMUM FLOW RATE (SELECT ONE)	
(GALLONS PER MINUTE)	1992
(CUBIC FEET PER MINUTE)	1996
(LITERS PER MINUTE)	1997
TEST VOLTAGE (SELECT ONE)	
(VOLTS DC)	2000
(VOLTS AC)	2002

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1959	THE TEST PRESSURE SHALL BE 1959 KILOPASCAL(S).
1975	THE TEST MEDIA SHALL BE 1975.
1980	THE TEST MEDIA SHALL CONFORM TO 1980.
1982	THE TEST MEDIA TEMPERATURE SHALL BE 1982 DEGREES CELSIUS.
1988	THERE SHALL BE 1988 TEST CYCLES.
1965	THE FLOW RATE SHALL BE NOT LESS THAN 1965 GALLON(S) PER MINUTE.
1994	THE FLOW RATE SHALL BE NOT LESS THAN 1994 STANDARD CUBIC FEET PER MINUTE.
1995	THE FLOW RATE SHALL BE NOT LESS THAN 1995 LITER(S) PER MINUTE.
1992	THE FLOW RATE SHALL BE NOT GREATER THAN 1992 GALLON(S) PER MINUTE.
1996	THE FLOW RATE SHALL BE NOT GREATER THAN 1996 STANDARD CUBIC FEET PER MINUTE.
1997	THE FLOW RATE SHALL BE NOT GREATER THAN 1997 LITER(S) PER MINUTE.
2000	THE APPLIED VOLTAGE SHALL BE 2000 VOLTS DC.
2002	THE APPLIED VOLTAGE SHALL BE 2002 VOLTS AC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL RELIEF	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1967
AS FOLLOWS:	1981
RELIEF PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	1954
(KILOpASCALS)	1968
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1922
PER DOCUMENT (DOC DES)	1924
TEST PRESSURE (SELECT ONE)	
(POUNDS PER SQUARE INCH GAGE)	1926
(KILOPASCALS)	1973
TEST TEMPERATURE (DEGREES CELSIUS)	1932
TEST MEDIA (NAME)	1938
TEST MEDIA (DOC DES)	1940
TEST MEDIA TEMPERATURE (DEGREES CELSIUS)	1942
TEST CYCLES (QUANTITY)	1948

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1967	THERMAL RELIEF. THE REQUIREMENT(S) SHALL BE IN Accordance WITH THE BASE DOCUMENT, EXCEPT 1967.
1981	THERMAL RELIEF. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1954	THE RELIEF PRESSURE SHALL BE 1954 POUND(S) PER SQUARE INCH GAGE.
1968	THE RELIEF PRESSURE SHALL BE 1968 KILOPASCAL(S).
1922	THERMAL RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1922.
1924	THERMAL RELIEF. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1924 |
1926	THE TEST PRESSURE SHALL BE 1926 POUNDS PER SQUARE INCH GAGE.
1973	THE TEST PRESSURE SHALL BE 1973 KILOPASCAL(S).
1932	THE TEST TEMPERATURE SHALL BE 1932 DECREES CELSIUS.
1938	THE TEST MEDIA SHALL BE 1938.
1940	THE TEST MEDIA SHALL CONFORM TO 1940.
1942	THE TEST MEDIA TEMPERATURE SHALL BE 1942 DEGREES CELIUS.
1948	THERE SHALL BE 1948 TEST CYCLES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4681
NO EVIDENCE OR PHYSICAL DAMAGE.	4682
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
NO LAMP IN TEST CIRCUIT SHALL LIGHT.	1457
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1505
PER MIL-STD-810, METHOD 514.	1514
*PROCEDURE NUMBER (ROMAN NUMERAL)	1518
EQUIPMENT (CATEGORY)	1540
CURVE (LETTERS)	1525
APPLICABLE TABLE (NUMBER)	1532
APPLICABLE FIGURE (NUMBER)	1559
OPERATION NOT REQUIRED.	1424
TEMPERATURE (DEGREES CELSIUS)	1542
DURATION AT TEMPERATURE (HOURS)	1544

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4681	VIBRATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4681.
4682	VIBRATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1457	NO LAMP IN THE TEST CIRCUIT SHALL LIGHT.
1505	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1505.
1514	VIBRATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1518	PROCEDURE NUMBER 1518 SHALL APPLY.
1540	THE EQUIPMENT CATEGORY SHALL BE 1540 IN ACCORDANCE WITH METHOD 514 OF MIL-STD-810.
1525	CURVE 1525 SHALL APPLY.
1532	PROCEDURE AND TIME SCHEDULE SHALL BE AS SHOWN IN TABLE 1522 OF METHOD 514 OF MIL-STD-810.
1559	TEST CURVES SHALL BE AS SHOWN IN FIGURE 1559 OF METHOD 514 OF MIL-STD-810.
1424	OPERATION DURING THE TEST IS NOT REQUIRED.
1542	VIBRATION TEST SHALL BE PERFORMED AT A TEMPERATURE OF 1542 DEGREES CELSIUS.
1544	THE TEMPERATURE TIME DURATION SHALL BE 1544 HOUR(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MONITOR CONTACT CHATTER PER MIL-STD-202, METHOD 310.	
*TEST CIRCUIT (LETTER)	1402
*TEST CONDITION (LETTER)	1382
VOLTAGE TRANSIENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2550
PERFORM AS SPECIFIED.	2552
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2554
PER MIL-STD-1275.	2556
MOUNTING HARDWARE (SEE TABLE VIII, DOD-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1402	MONITORING DURING THE TEST SHALL BE IN ACCORANCE WITH METHOD 310 OF MIL-STD-202. TEST CIRCUIT LETTER 1402 SHALL APPLY.
1382	TEST CONDITION LETTER 1382 OF METHOD 310 OF MIL-STD-202 SHALL APPLY.
2550	VOLTAGE TRANSIENT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2550.
2552	VOLTAGE TRANSIENT. THE VALVE SHALL PERFORM AS SPECIFIED WHEN SUBJECTED TO TRANSIENT VOLTAGES.
2554	VOLTAGE TRANSIENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2554.
2556	VOLTAGE TRANSIENT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-1275.
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
C____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
APPLICABLE DOCUMENTS (SEE DOD-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE DOD-STD-35)	
PACKAGING (SEE DOD-STD-35)	
NOTES (SEE DOD-STD-35)	
NOMENCLATURE (SEE DOD-STD-35)	
SUPERSEDED DOCUMENT (SEE DOD-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE DOD-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

Custodians:
Army-MI

User activity:
Army-MU

Review activities:
Army -A T
Army-AV
Army-EL
Army-ME
Army-MR
Army-SG
Army-WC

Preparing activity:
Army-MI


(Project EDS-A358)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

APPENDIX A


ILLUSTRATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

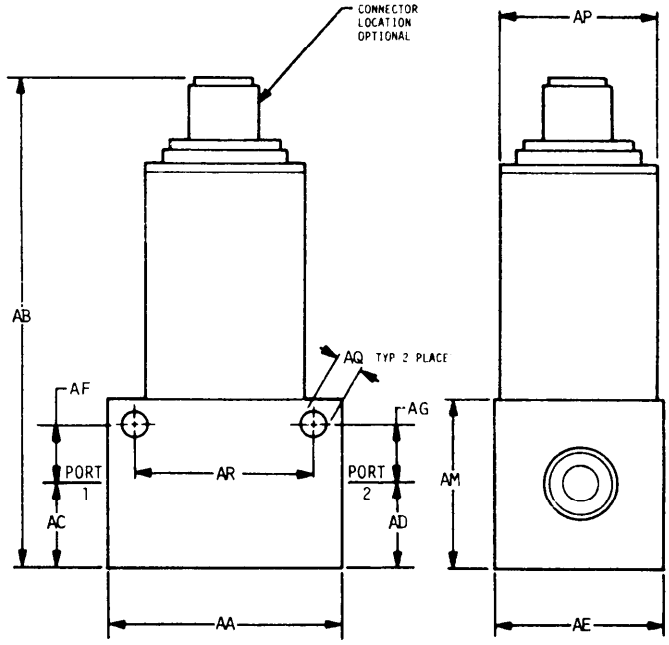


208-01-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

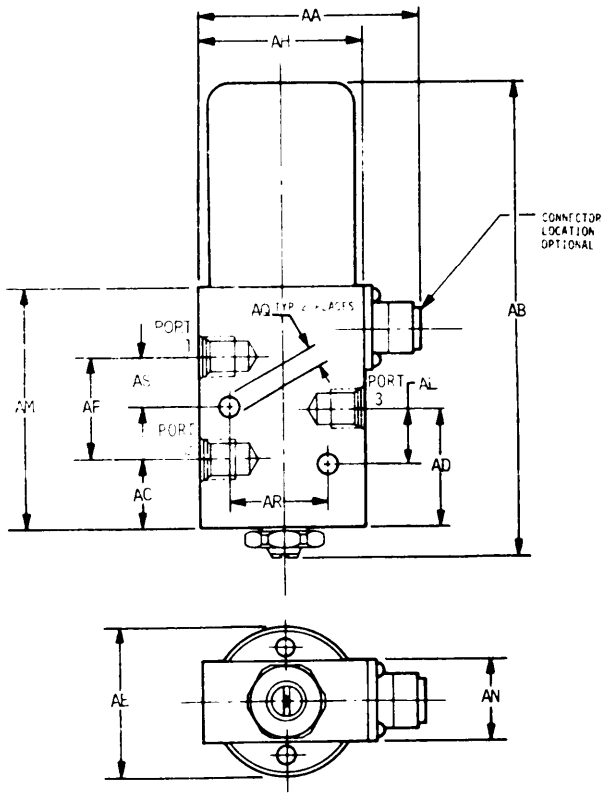


206-01-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

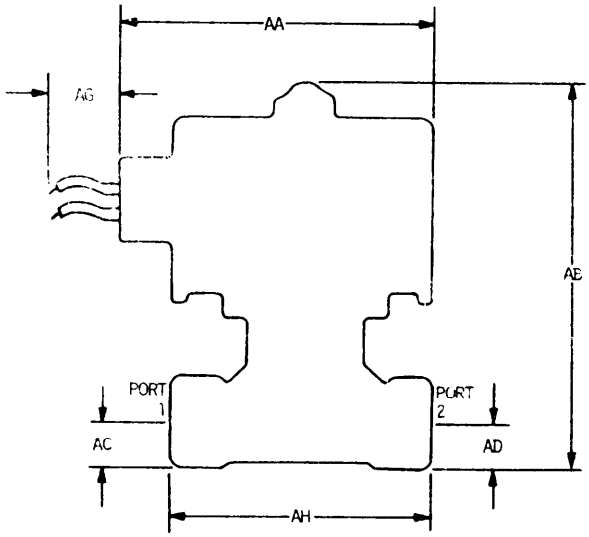


208-01-3

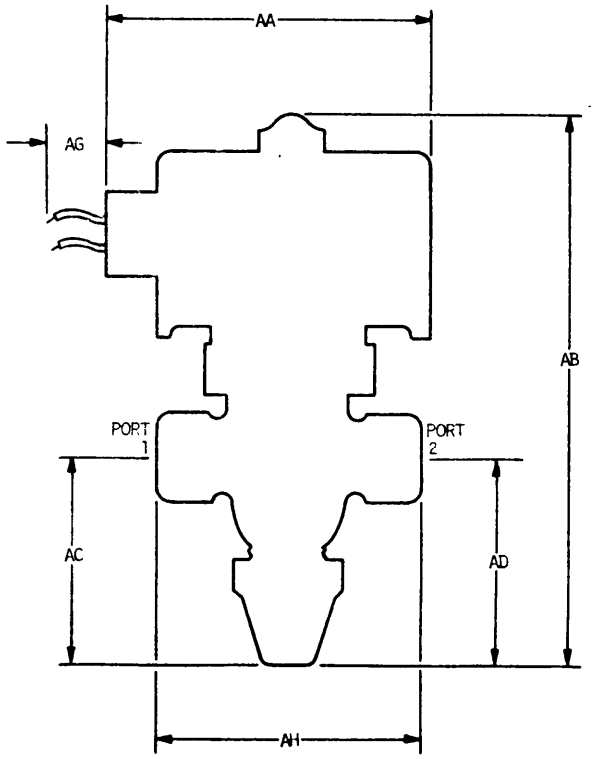


208-01-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

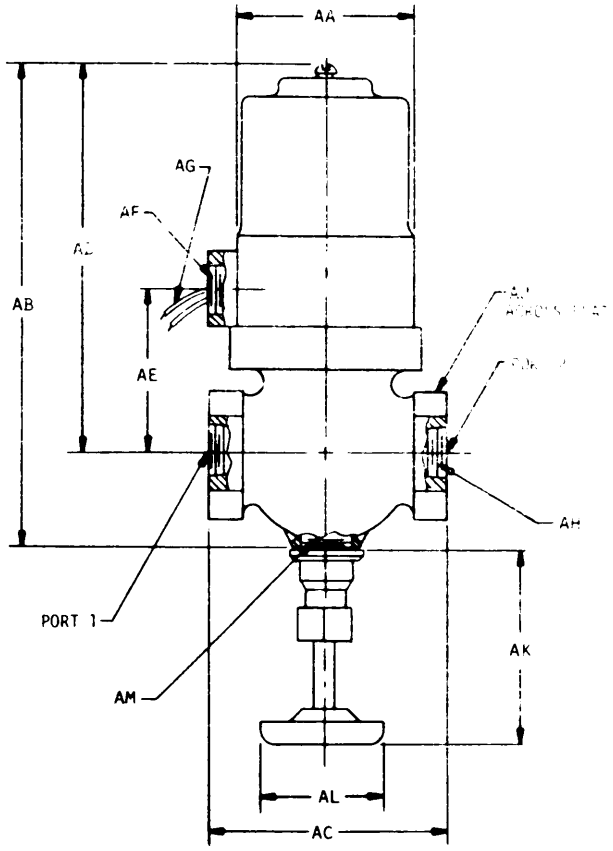


208-01-5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

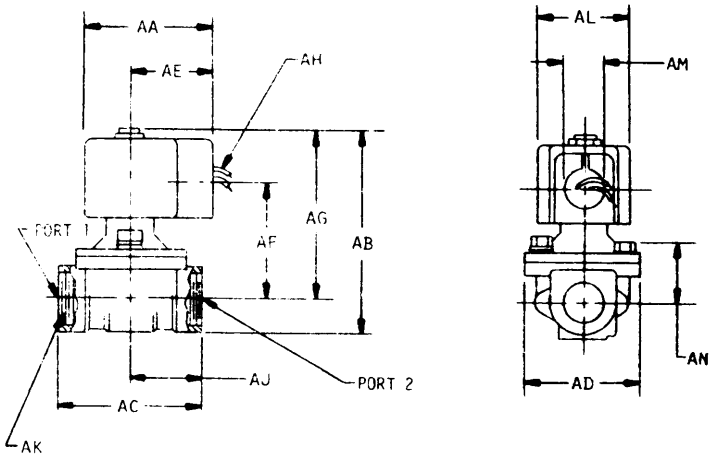


208-01-6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

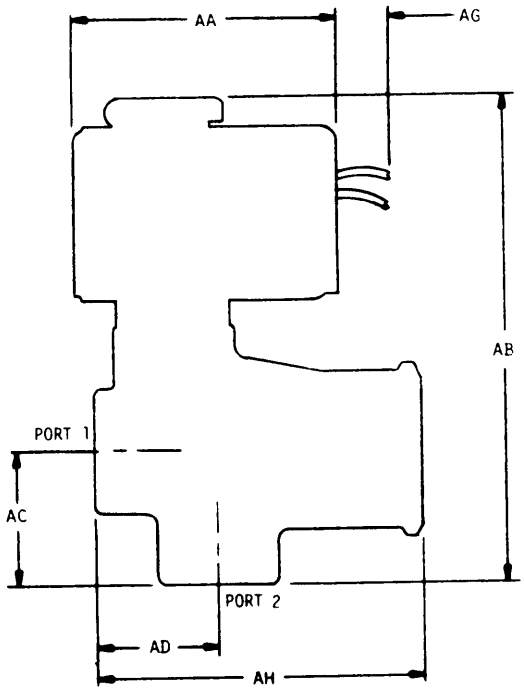


208-01-7

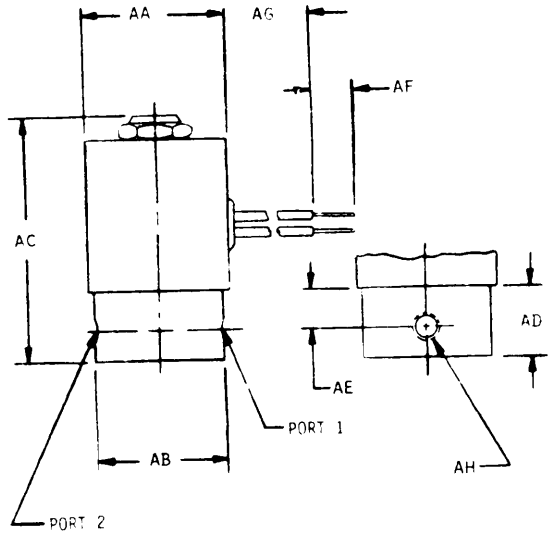


208-01-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

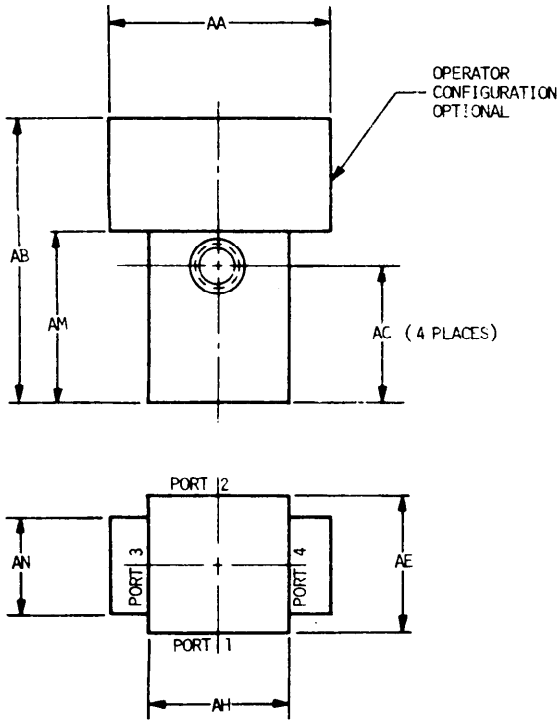


208-02-1

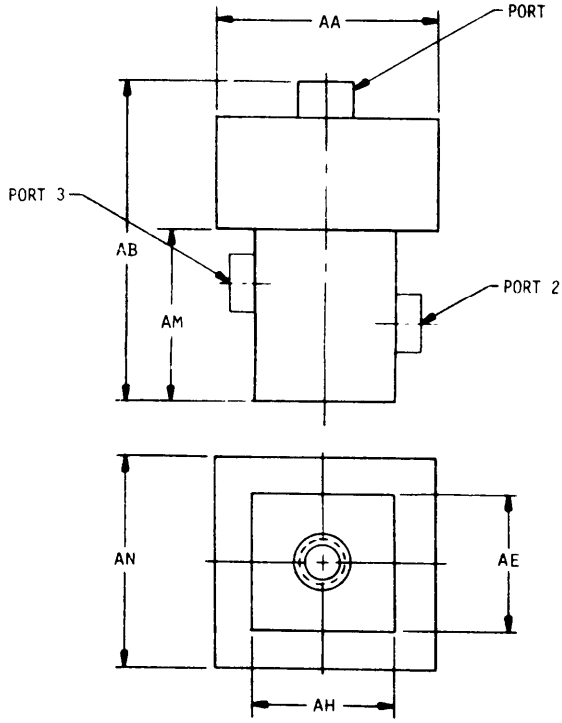



208-02-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

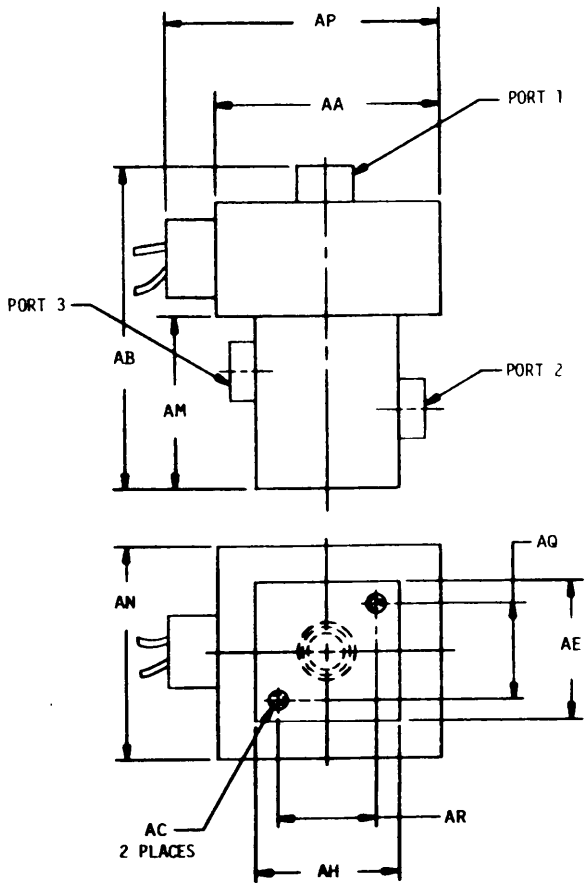


208-02-3

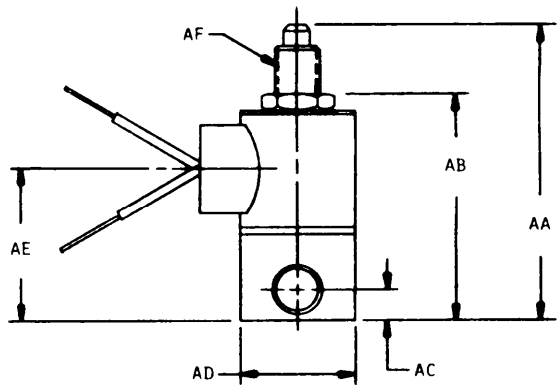


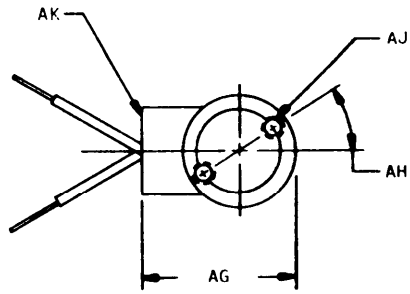

208-02-4


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

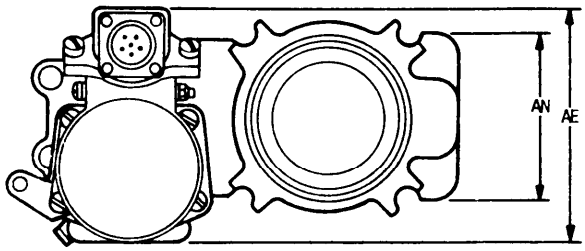

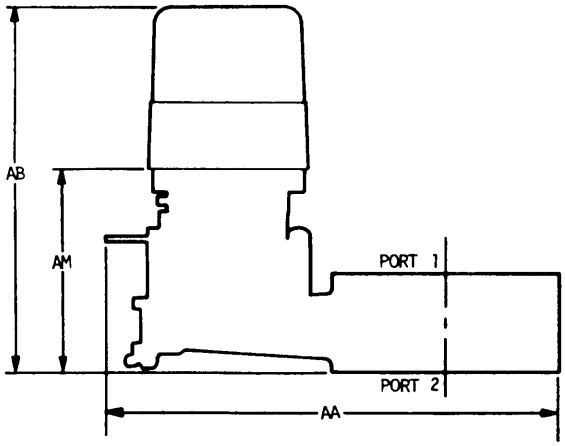


208-03-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

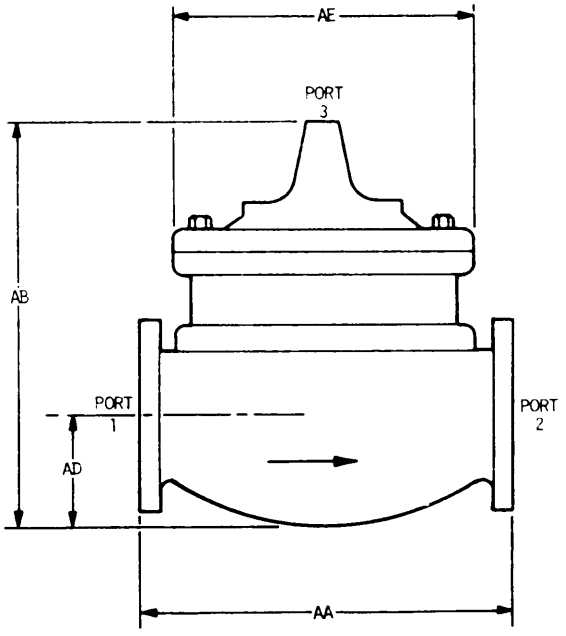


2[illegible]

Source: https://assist.dla.mil -- Downloaded: 2026[illegible]10-23T20:57Z
Check the source to verify that this is the current[illegible]version before use.

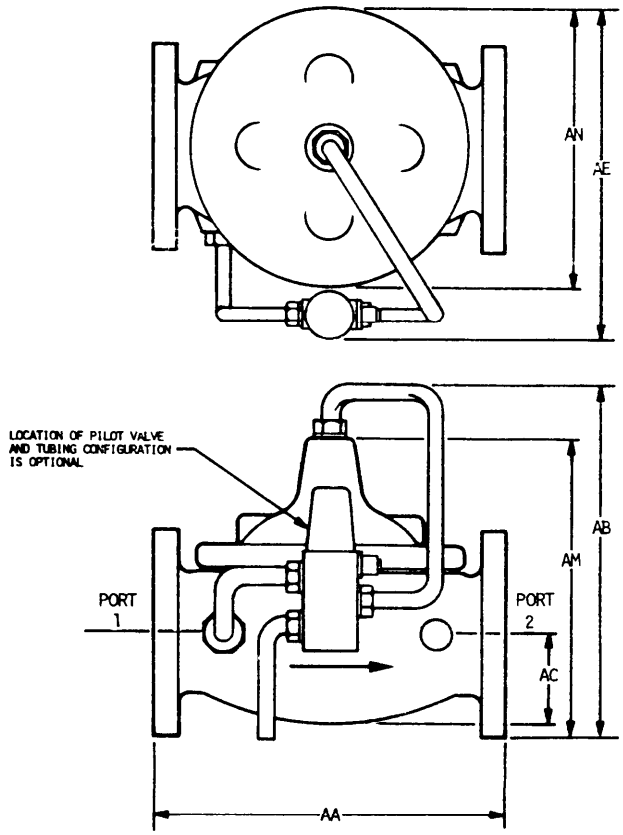


208-05-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

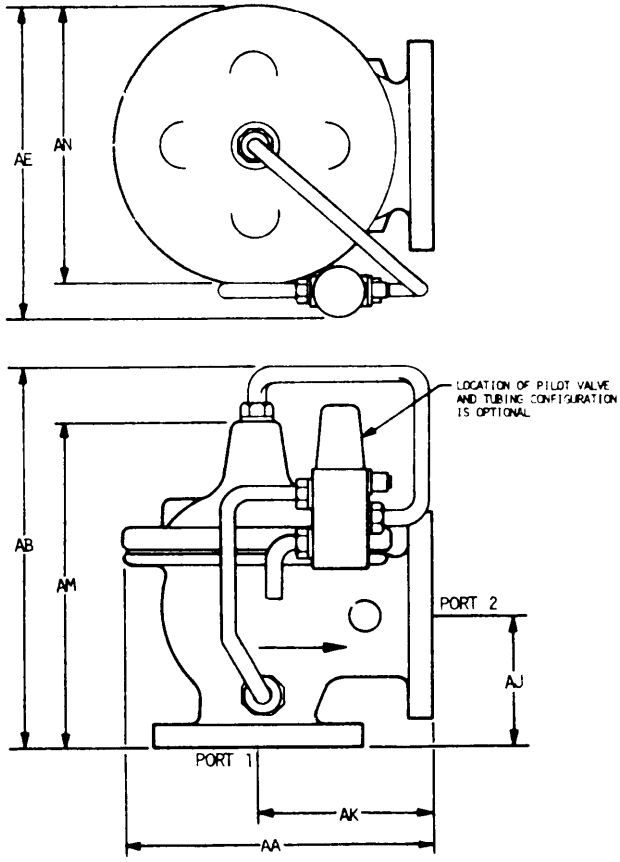

208-05-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

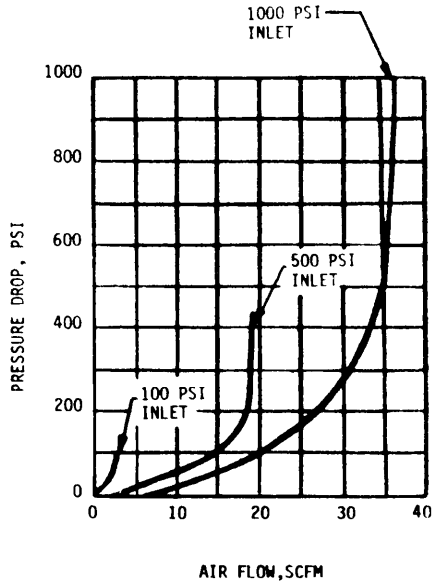

208-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

APPENDIX B

CHARACTERISTIC CODE INDEX

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:57Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1518	106	1606	28	1821	34
0102	12	1520	74	1608	28	1822	78
0103	12	1522	74	1610	28	1823	34
0104	12	1523	74	1622	36	1826	78
0105	12	1524	74	1624	36	1832	78
0107	14	1525	106	1628	36	1838	78
0108	14	1532	106	1631	74	1840	78
0700	12	1538	106	1632	36	1842	78
0800	12	1539	48	1633	74	1844	78
1004	12	1540	106	1702	76	1850	78
1005	12	1542	106	1704	76	1852	78
1006	12	1544	106	1706	76	1854	80
1008	12	1551	92	1712	76	1856	78
1009	22	1559	106	1715	76	1858	80
1371	72	1562	22	1718	76	1859	80
1372	74	1563	22	1720	76	1860	78
1373	72	1564	22	1722	76	1861	80
1376	72	1565	22	1724	76	1862	76
1377	72	1566	26	1734	74	1863	76
1378	72	1567	22	1736	74	1864	76
1380	70	1570	22	1742	86	1865	34
1381	74	1571	22	1744	86	1882	84
1382	108	1572	22	1746	86	1884	84
1384	72	1575	26	1752	86	1886	84
1386	72	1576	26	1760	86	1888	84
1387	72	1577	26	1762	86	1892	84
1388	72	1578	26	1764	86	1897	34
1402	108	1580	26	1766	86	1898	76
1407	72	1582	28	1776	86	1899	78
1424	106	1584	28	1778	86	1902	84
1457	106	1586	28	1782	34	1903	84
1477	68	1587	28	1786	34	1904	80
1497	74	1588	26	1792	34	1905	84
1498	74	1590	26	1798	34	1906	84
1499	96	1592	26	1800	34	1907	84
1503	96	1595	26	1802	34	1908	84
1505	106	1598	26	1804	34	1909	86
1510	48	1600	26	1814	34	1910	86
1511	72	1602	26	1816	34	1911	86
1514	106	1604	26	1820	78	1915	96

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
1916	96	2022	98	2164	54	2262	56
1917	98	2028	98	2166	52	2264	56
1918	98	2034	98	2167	52	2265	56
1920	84	2044	98	2168	54	2266	56
1921	84	2050	98	2169	54	2268	56
1922	104	2052	98	2171	50	2274	54
1924	104	2054	98	2172	50	2276	54
1925	98	2056	98	2174	50	2278	54
1926	104	2057	98	2176	50	2282	54
1932	104	2058	100	2178	52	2283	80
1933	98	2060	100	2182	60	2284	56
1935	100	2062	100	2184	60	2286	56
1938	104	2064	100	2186	60	2287	82
1940	104	2074	96	2192	60	2291	82
1942	104	2076	96	2195	60	2292	82
1948	104	2080	32	2198	60	2298	82
1954	104	2084	32	2200	60	2300	82
1959	102	2088	32	2202	62	2302	82
1962	100	2094	32	2204	62	2304	82
1964	100	2100	32	2210	62	2308	80
1965	102	2102	32	2212	62	2317	82
1966	100	2104	32	2214	62	2319	82
1967	104	2110	32	2216	62	2321	82
1968	104	2112	32	2222	62	2322	58
1973	104	2114	32	2223	62	2323	82
1975	102	2116	32	2225	62	2324	58
1980	102	2117	32	2226	60	2325	82
1981	104	2122	30	2227	64	2328	58
1982	102	2124	32	2228	60	2334	60
1988	102	2132	52	2229	62	2336	60
1992	102	2134	52	2230	62	2339	60
1994	102	2136	52	2231	54	2340	60
1995	102	2139	52	2232	54	2344	58
1996	102	2142	52	2238	54	2346	58
1997	102	2148	52	2241	56	2352	30
2000	102	2150	52	2244	56	2353	30
2002	102	2152	52	2250	56	2358	30
2006	100	2158	52	2252	56	2359	30
2008	100	2160	52	2254	56	2360	30
2010	100	2162	52	2260	56	2364	30

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2366	30	2484	66	4359	29	4399	29
2370	30	2486	66	4360	29	4400	29
2371	30	2488	66	4361		4401	29
2372	30	2490	66	4362		4402	29
2374	30	2492	66	4363	29	4403	29
2400	38	2494	68	4364	29	4404	29
2402	38	2496	68	4365	29	4405	29
2404	38	2500	88	4366	29	4406	29
2406	38	2502	88	4367	29	4407	29
2410	38	2504	88	4368	29	4408	29
2412	38	2506	88	4369	29	4409	29
2414	38	2508	88	4370	29	4420	37
2420	38	2510	88	4371	29	4421	37
2422	38	2520	88	4372	29	4422	37
2424	38	2522	88	4373	29	4423	37
2426	40	2524	88	4374	29	4424	37
2428	40	2526	88	4375	29	4425	37
2430	40	2528	88	4376	29	4426	37
2432	40	2530	90	4377	29	4427	37
2434	40	2532	90	4378	29	4428	37
2440	48	2534	90	4379	29	4429	37
2442	50	2536	90	4380	29	4430	37
2444	50	2538	90	4381	29	4431	37
2446	50	2540	90	4382	29	4432	37
2448	50	2542	90	4383	29	4433	37
2450	50	2544	90	4384	29	4434	37
2452	50	2546	90	4385	29	4435	37
2454	50	2550	108	4386	29	4436	37
2456	50	2552	108	4387	29	4437	37
2460	64	2554	108	4388	29	4438	37
2462	64	2556	108	4389	29	4439	37
2464	64	4350	29	4390	29	4440	37
2466	64	4351	29	4391	29	4441	37
2470	66	4352	29	4392	29	4442	37
2472	66	4353	29	4393	29	4443	37
2474	66	4354	29	4394	29	4444	37
2476	66	4355	29	4395	29	4445	37
2478	66	4356	29	4396	29	4446	37
2480	66	4357	29	4397	29	4447	37
2482	66	4358	29	4398	29	4448	37

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
4449	37	4499	59	4779	92	4886	42
4460	59	4500	59	4780	92	4890	70
4461	59	4501	59	4783	92	4891	42
4462	59	4502	59	4786	92	4894	40
4463	59	4503	59	4788	70	4895	48
4464	59	4504	59	4790	70	4897	46
4465	59	4505	59	4791	68	4900	42
4466	59	4506	59	4793	70	4901	40
4467	59	4507	59	4795	68	4902	44
4468	59	4519	81	4798	68	4904	18
4469	59	4520	81	4799	68	4905	18
4470	59	4521	81	4801	48	4906	40
4471	59	4522	81	4803	68	4908	40
4472	59	4523	81	4805	68	4950	24
4473	59	4524	81	4813	68	4953	48
4474	59	4525	81	4815	68	4956	48
4475	59	4526	81	4840	48	4969	70
4476	59	4527	81	4842	46	4970	70
4477	59	4528	81	4844	46	4971	70
4478	59	4529	81	4845	46	4998	90
4479	59	4530	81	4846	46	4999	90
4480	59	4531	81	4847	44	5000	46
4481	59	4532	81	4848	46	5046	18
4482	59	4533	81	4849	42	5048	18
4483	59	4534	81	4850	46	5052	18
4484	59	4535	81	4853	70	5054	18
4485	59	4536	81	4854	44	5068	18
4486	59	4537	81	4855	44	5069	18
4487	59	4538	81	4856	44	5070	18
4488	59	4681	106	4859	42	5071	18
4489	59	4682	106	4861	44	6202	70
4490	59	4717	46	4862	44	6204	96
4491	59	4724	48	4867	46	6206	70
4492	59	4754	64	4869	46	6207	70
4493	59	4755	64	4870	46	6245	92
4494	59	4756	64	4872	48	6246	92
4495	59	4760	62	4874	44	6247	92
4496	59	4761	64	4875	44	6248	92
4497	59	4762	64	4884	40	6267	46
4498	59	4775	92	4885	42	6280	42

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
6292	42	7301	18	7620	22		
6293	42	7302	18	7627	22		
6294	42	7305	94	7628	22		
6299	48	7306	94	7629	110		
6300	42	7307	96	7630	110		
6308	42	7309	96	7641	22		
6310	44	7311	92				
6311	42	7312	94				
6312	42	7313	94				
6327	94	7315	92				
6338	94	7316	92				
6339	94	7317	94				
6340	94	7318	94				
6341	94	7572	24				
6342	94	7577	24				
6343	94	7580	24				
6344	94	7581	16				
6345	96	7582	16				
6346	96	7583	16				
6347	96	7584	16				
6348	96	7585	16				
6349	96	7586	16				
6359	72	7587	16				
6369	12	7588	16				
6372	110	7589	16				
6870	108	7590	18				
6873	12	7591	20				
6874	14	7592	20				
6941	14	7594	20				
6942	14	7595	20				
6991	110	7597	20				
6992	110	7598	20				
6993	110	7600	20				
6994	110	7601	20				
6995	110	7602	20				
7001	110	7609	20				
7002	110	7610	20				
7003	110	7611	20				
7004	110	7618	20				
7005	11.0	7619	20				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

INDEX

	Page
Accelerated Corrosion	30
Additional Part Marking	110
Additional Requirements	110
Altitude Endurance	30
Aperture Cards Required	14
Applicable Documents	112
Base Document	12
Burst Pressure	34
Burst Pressure Rating	16
Chemical Composition (Valve Body)	36
City, State, Zip	12
Classification	22
Cleanliness	38
Company Name/Command	12
Coil Current	38
Configuration	22
Contract Number/Office Symbol	12
Control, Source	12
Control, Specification	14
Current Rating	20
Design and Construction	26
Dielectric Withstanding Voltage at Reduced Barometric Pressure	40
Dielectric Withstanding Voltage at Sea Level	44
Dust	48
Electromagnetic Interference	48
Endurance	50
Endurance, Contaminated Medi	54
Explosive Atmosphere	58
Finishes	24
Fluid Resistance	60
Format	12
Frequency Rating	22
Fungus	62
Government Design Ac y [illegible]CM	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Hold-In Voltage	64
Humidity	68
Illustrations	24
Insulation Resistance	70
Leakage	74
Materials	24
Metals	24
Mounting Hardware	108
Nomenclature	112
Notes	112
Operating Pressure Rating	16
Operating Torque	76
Packaging	112
Part Marking	110
Part Number	14
Part Number Cross-Reference	112
Phone Number	12
Power and Time of Operation	80
Pressure Drop	82
Proof Pressure	86
Proof Pressure Rating	16
Pull-in Voltage	88
Quality Assurance Provisions	112
Ratings	22
Requester's FSCM	12
Requester's Name	12
Revision of AEDPS Document (Number)	14
Salt Fog	90
Scope	14
Shock	92
Source Table	14
Street/Building	12
Superseded Document	112
System Application	12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

INDEX (CONT)

	Page
Tabulated Characteristics	24
Temperature, High	96
Temperature, Low	100
Temperature Rating	18
Thermal Relief	104
Units of Measure	14
Vibration	106
Voltage Rating	20
Voltage Transient	108
Workmanship	108

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET___OF___

SRS CONTROL NO.	
*TITLE CODE (1 2 3 4 5 6)	*REQUESTER NO. (7 8 9 10 11 12)

	CHAR CODE			
*REQUESTER'S NAME	Ø	1	Ø	1
*COMPANY NAME/COMMAND	Ø	1	Ø	2
*STREET/BUILDING	Ø	1	Ø	3
*CITY, STATE, ZIP	Ø	1	Ø	4
*PHONE NO. INCLUDE A/C AUTOVON IF APPLICABLE	Ø	1	Ø	5
*REQUESTER FSCM	1	Ø	Ø	4
*CONTRACT NO./OFFICE SYMBOL	1	Ø	Ø	5
*BASE DOCUMENT	1	Ø	Ø	6
*SYSTEM APPLICATION	1	Ø	Ø	8
*GOVERNMENT DESIGN ACTIVITY FSCM	6	3	6	9
*FORMAT: SIX SECTION DOCUMENT.	Ø	7	Ø	Ø
OR ONE SECTION DOCUMENT.	Ø	8	Ø	Ø
REVISION OF AEDPS DOCUMENT NO.	Ø	1	Ø	8
*CONTROL: SOURCE.	6	8	7	3
OR SPECIFICATION.	6	8	7	4
UNIT OF MEASURE: U.S.	6	9	4	1
OR SI.	6	9	4	2
*SOURCE TABLE	9	A	A	B

CHARACTERISTIC VALUE

1 5 10 15 20 25 30 35 40 45 50 55 60

PLEASE SUPPLY THE FOLLOWING:
DASH-NUMBERED PART___REV___NOTICE#___

AS A FINAL CHECK, SCAN THE SRS FOR THE FOLLOWING COMMON ERRORS:

- ☐ MANDATORY CHARACTERISTIC CODES AND VALUES NOT SUPPLIED
- ☐ ZERO (Ø) WRITTEN WITHOUT VIRGULE (Ø)
- ☐ CHARACTERISTIC CODE USED MORE THAN ONCE (CHARACTERS Ø, S̄, I, Z CORRECTLY WRITTEN)

*MANDATORY

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-23T20:57Z
Check the source to verify that this is the current version before use.

SRS CONTROL NO.

*TITLE CODE						*REQUESTER NO.					
1	2	3	4	5	6	7	8	9	10	11	12

SPECIFICATION REQUIREMENT SHEET (SRS)

SHEET____OF____

CHAR CODE	CHARACTERISTIC VALUE
	1 5 10 15 20 25 30 35 40 45 50 55 60

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:57Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Missile Command
ATTN: AMSMI-RD-[illegible]E-TD-ST
Redstone Arsenal, [illegible] 35898-5276

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
DoD STD 3546B	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:57Z
Check the source to verify that this is the current version before use.