MILITARY SPECIFICATION

BAG, DELOUSING

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers one type of bag for use as a sealed container for lice-infested clothing during fumigation.

2. APPLICABLE DOCUMENTS

2.1 **Government documents.** The following documents, of the issue in effect on date of invitation for bids, form a part of this specification:

SPECIFICATIONS

FEDERAL

O-M-261 — Methyl Bromide (Liquefied).

V-T-276 — Thread; Cotton.

JJ-B-191 — Belting; Conveyor Power Transmission Cotton (Solid-Woven).

TT-I-559 — Ink, Stencil; Opaque, for Marking Porous Surfaces (Wood Boxes, Fiber Cartons, etc.).

UU-C-128 — Cards, Index.

UU-P-268 — Paper, Kraft, Wrapping.

U-T-111 — Tape, Paper, Gummed (Sealing and Securing).

CCC-T-191 — Textile Test Methods.

DDD-T-86 — Tape, Cotton; Bleached, Dyed or Gray for General Use.

PPP-B-566 — Boxes, Folding Paperboard.

PPP-B-636 — Boxes, Fiber.

PPP-B-676 — Boxes, SetUp, Paperboard.

PPP-T-60 — Tape, Pressure-Sensitive Adhesive, Waterproof — for Packaging and Sealing.

MILITARY

MIL-C-897 — Cement Rubber (Synthetic - Rubber - to Rubber Adhesion).

MIL-P-1755 — Powder, Talcum; Plain and Borated.

MIL-C-17504 — Coating Compound, Acrylic, Clear.

STANDARDS

MILITARY

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 — Marking for Shipment and Storage.

FSC 4230

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:14Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply:

INTERSTATE COMMERCE COMMISSION

49 CFR 71–90. Interstate Commerce Commission Rules and Regulations for the Transportation of Explosives and Other Dangerous Articles.

(The Interstate Commerce Commission regulations are now a part of the Code of Federal Regulations (Revised 1956) available from the Superintendent of Documents, Government Printing Office, Washington 25, D.C. Orders for the above publication should cite "49 CFR 71–90 (Rev. 1956).")

CONSOLIDATED CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules.

(Application for copies of these freight classification rules should be addressed to the Consolidated Classification Committee, 202 Chicago Union Station, Chicago 6, Ill.)

3. REQUIREMENTS

3.1 Materials and components. All material and components shall conform to specifications and specification figures which form a part of this specification.

3.1.1 *Cloth.* The cloth shall be gray cotton sheeting singed and desized and shall conform to the physical requirements of table I.

TABLE I. *Physical requirements of cloth*

Characteristic	Requirement	Test method
Weight (ounces/sq. yd.).	3.25 ± 0.50	4.6.1
Tensile strength (psi)		4.6.2
Warp	50 minimum	
Filling	45 minimum	
Width (inches)	54 ± 0.50	4.6.4
Thread count (per inch).		4.6.5
Warp	60 minimum	
Filling	56 minimum	

3.1.2 *Bag body.* The finished cured fabric used for the bag body shall conform to the physical requirements of table II.

TABLE II. *Physical requirements of bag body*

Characteristic	Requirement	Test method
Coating weight (ounces/sq. yd.).	6.5 maximum	4.6.1
Breaking strength (pounds).		4.6.2
Warp	95 minimum	
Filling	85 minimum	
Tearing strength (pounds).		4.6.3
Warp	30 minimum	
Filling	20 minimum	
Width (inches)	51 minimum	4.6.4
Adhesion test (pounds per inch).	5 minimum	4.6.6

3.1.2.1 *Heat resistance.* The two surfaces of the fabric or seam shall show no evidence of blocking when tested as specified in 4.6.7.

3.1.2.2 *Low temperature resistance.* The coated fabric shall not show signs of cracking or flaking when tested as specified in 4.6.8. The increase in hydrogen permeability on the fold shall not exceed 50 percent of the original.

3.1.2.3 *Hydrogen permeability.* The permeability of the coated fabric to hydrogen shall not exceed 10.0 liters per square meter per 24 hours at 25° C when tested as specified in 4.6.9.

3.1.3 *Cement.* The cement for the seams shall conform to Specification MIL–C–897.

3.1.4 *Strapping.* Tape for the strapping shall be made from black synthetic rubber covered fabric. Any fabric meeting the minimum requirements of table I (see 3.1.1) may be used as a base for the tape. The fabric shall be coated on one side with not less than 1.5 ounces per square yard black synthetic rubber and on the other side with not less than 1.0 ounce per square yard. After cure, the latter side of the fabric shall be coated with not less than 2.5 ounces per square yard black synthetic rubber for adhesive purposes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:14Z
Check the source to verify that this is the current version before use.

3.1.5 *Tie tapes.* The tie tapes shall be type I woven cotton tape, unbleached, ½ inch wide in compliance with Specification DDD–T–86. Tie tapes, after being secured to the bag, shall be tested as specified in 4.6.6.3. The pull required to separate the tapes from the fabric shall not be less than 8 pounds per inch.

3.1.6 *Closure bars.* Closure bars shall be 1½ inches wide, ¼ inch thick and 25 inches long and the material shall conform to Specification JJ–B–191.

3.1.7 *Seams.* All seams shall be as specified in 3.2 and shall not separate under a pull of less than 4 pounds per inch when tested as specified in 4.6.6.2.

3.1.8 *Cotton thread.* The thread for stitching shall be cotton thread, machine-twist and not finer than 20/4 cord conforming to the requirements of Specification V–T–276.

3.2 **Fabrication procedure.**

3.2.1 *Form.* The finished bag (fig. 1) shall be 60 inches ± ¼ inch long and 25 inches ± ¼ inch wide. Patterns shall be laid out so that the 64-inch length occurs in the warp direction. The bag shall be assembled in such a manner that the heavy-coated side will be the inner surface. This shall be accomplished by bringing the selvedge together and overlapping each by 1 inch to form a seam down the center of the bag. The overlap shall be cemented together and rolled down to form an airtight seam. The seam shall be strapped both inside and outside with the 1-inch strapping centered on the raw edge of the seam it is covering.

3.2.2 *Bottom of bag.* The lower section of the bag shall be cemented between the plies in the area shown in figure 1. The cement shall follow a curve such that at each corner it extends to a point at least 3 inches from the corner along the bisector of the right angle. A 1½ inch wide strapping shall be laid over the inside cemented edge starting 5 inches up the side of the bag and running across the width of the bag and up 5 inches on the opposite side.

3.2.3 *Closure bars.* The closure bars shall be placed at the top opening of the bag, a distance of 60 inches from the top edge of the closure bar to the bottom of the bag as shown in figure 2. The approximately 4 inches of fabric remaining shall be folded over the bar toward the outside of the bag to form a hem and shall be laid in cement. The raw edge of this hem shall be taped with a 1-inch tape. When flattened, the extremities of the closure bar shall be reinforced both inside and outside with a 6-inch strip of tape the width of the closure bar.

3.2.4 *Tie tapes.* Four tie tapes on the back and four tie tapes on the front shall be securely stitched to a strip, and cemented to the bag as shown in figure 2. The strip holding the tie tapes shall be covered by cementing a 2-inch wide strip over it which shall overlap the base strip by at least ¼ inch on each side. These strips shall be 25 inches in length and shall be made from the same material as the bag.

3.2.5 **Pocket and pocket patch.** The patch shall be rectangular in shape and shall be made of the same fabric as used in bag construction and shown in figure 3. The pocket shall be made of a piece of 12-ounce flat duck cut in the shape of a trapezoid (see fig. 3). The patch and pocket assembly shall be cemented on the inside of the bag so that the top of the patch is 20 inches from the top of the opening. The pocket patch shall be located so as to be on the operator's left when the bag is held with the face toward the operator. When positioned as described above, the patch shall be located as shown in figure 1, and folded so that one side is cemented to the inside of the front and the other side to the inside of the back.

3.3 **Marking of bag.** The marking information contained in figure 4 shall be stenciled on each bag using white stenciling ink conforming to Specification TT–I–559. Marking shall be centered on the face of the bag after the top is folded over.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:14Z
Check the source to verify that this is the current version before use.

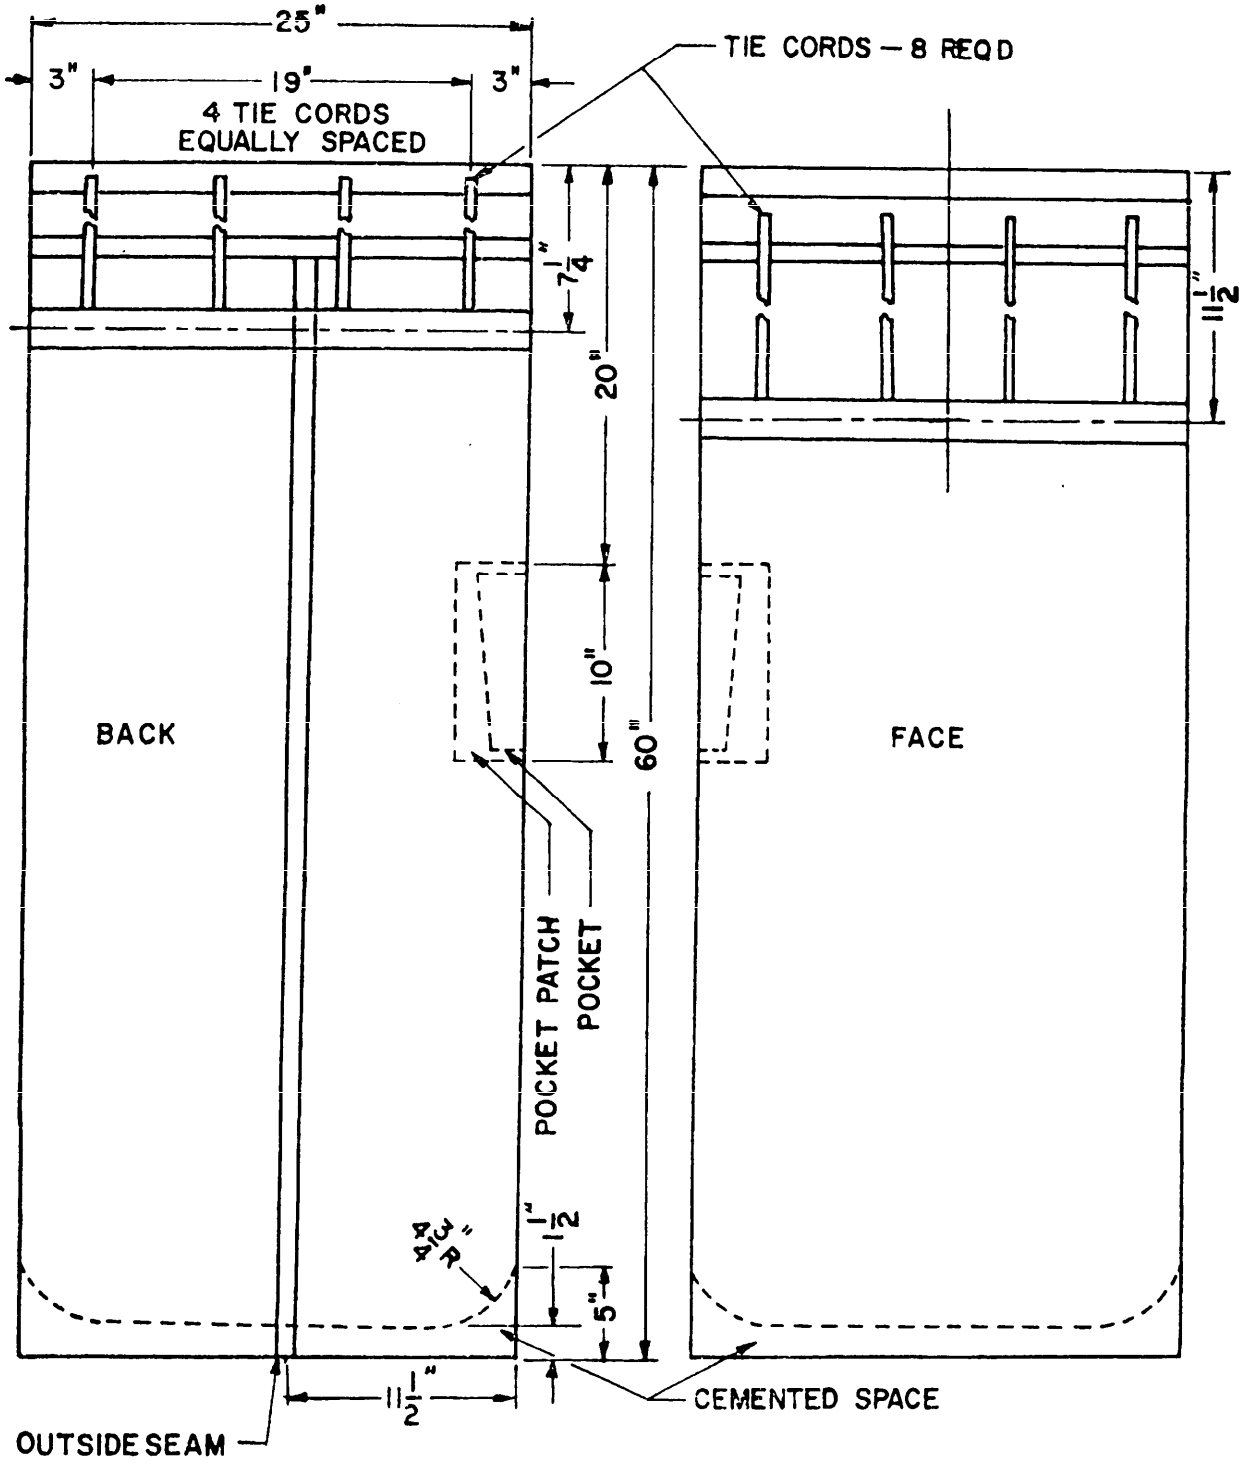


FIGURE 1. *Bag—delousing.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:14Z
Check the source to verify that this is the current version before use.

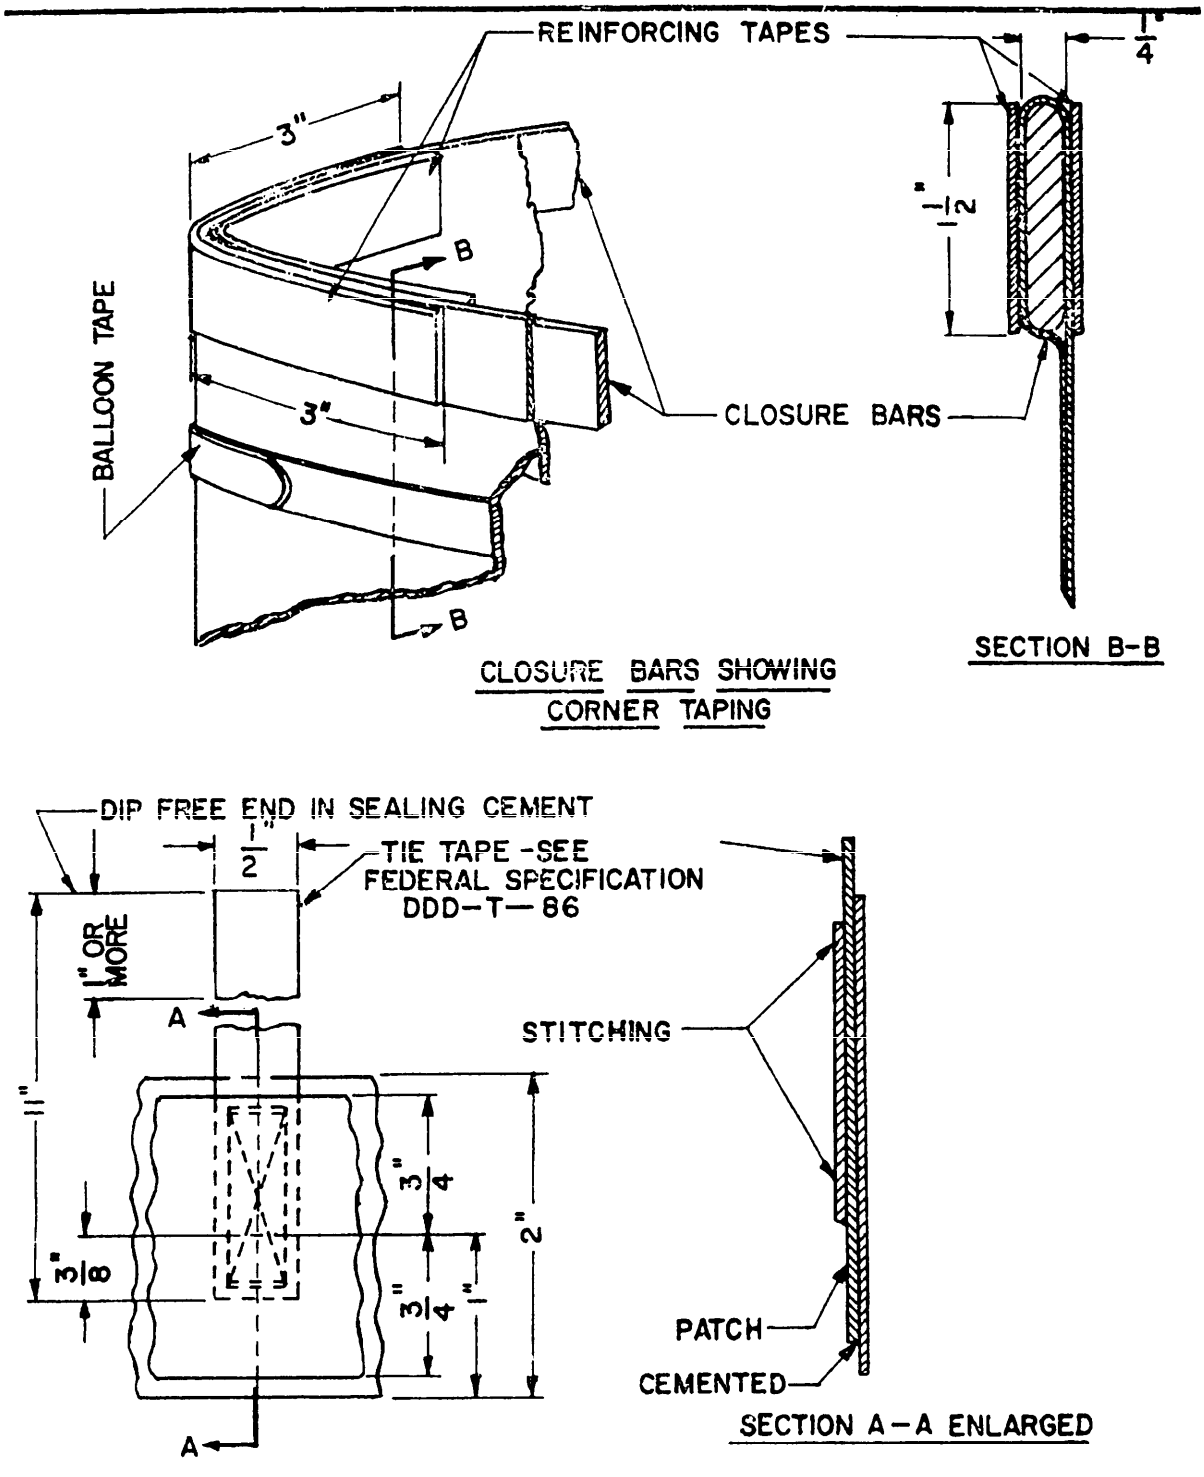


FIGURE 2. *Bag—delousing, tie tape construction.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:14Z
Check the source to verify that this is the current version before use.

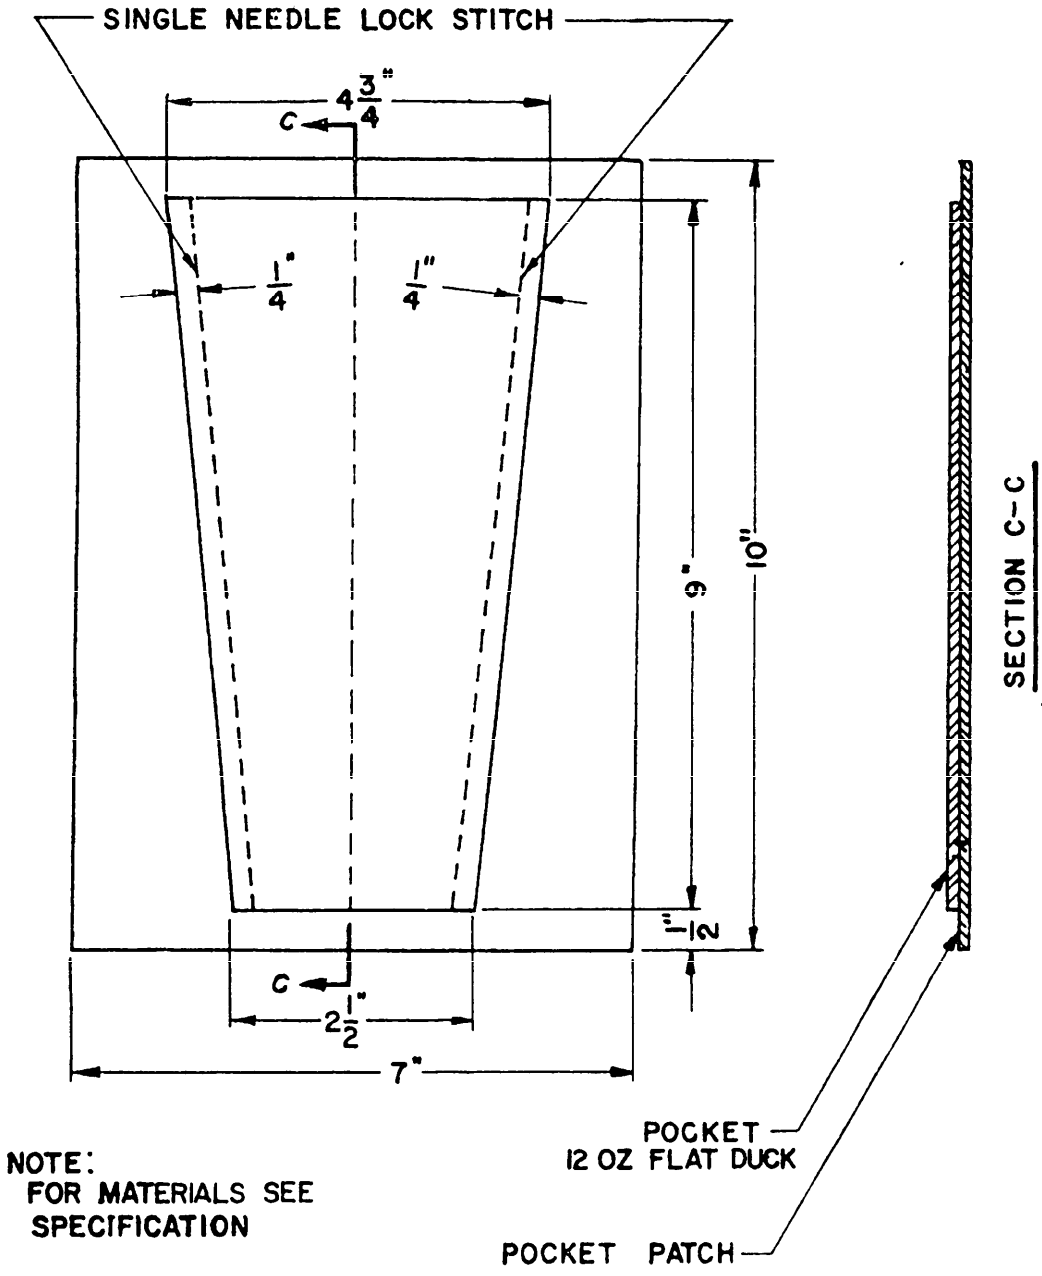


FIGURE 3. *Bag—delousing, pocket and pocket patch.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:14Z
Check the source to verify that this is the current version before use.

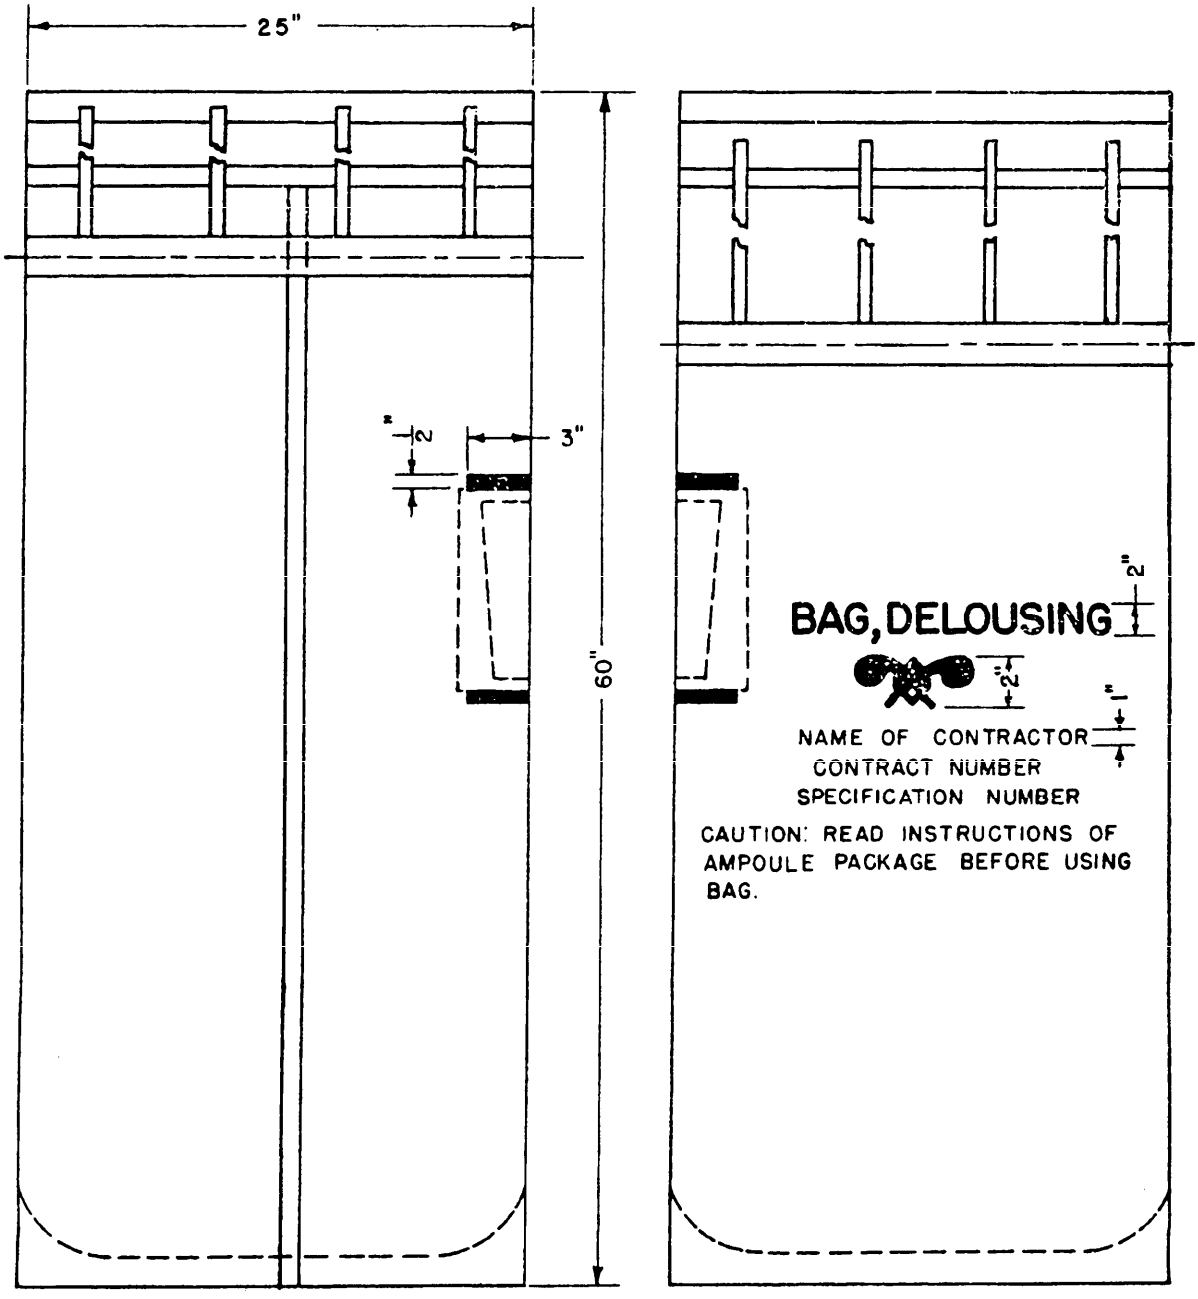


FIGURE 4. *Bag—delousing (marking diagram)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:14Z
Check the source to verify that this is the current version before use.

3.4 **Preproduction sample.** Prior to the start of regular production a preproduction sample of 15 delousing bags shall be produced using the same methods, materials, and equipment as will be used during regular production.

3.5 **Instruction card.** An instruction card conforming to figure 5 shall be provided. The card shall be 3 by 5 inches, conforming to grade D of Specification UU–C–128, and the legend shall be imprinted in black, 12-point type. The card shall be coated with clear acrylic compound conforming to Specification MIL–C–17504 and placed in pocket of the bag.

U.S. ARMY CHEMICAL CORPS
BAG, DELOUSING

1. A 20-milliliter ampoule of methyl bromide, type B, conforming to Specification O–M261 shall be used as the fumigant.
2. IMPORTANT: Do not open small white bag which contains the ampoule.
3. Use only in well ventilated building or in open.
4. Place the carton containing ampoule in pocket on side of bag.
5. Fill bag loosely with clothing.
6. Fold top of bag 3 times, tie tightly, and lay bag down flat.
7. Break ampoule with heel of shoe.
8. Fumigate 45 minutes at temperature of 55° F. or above. Add ½ hour for each 10° F. drop below 55° F.
9. Remove clothing and shake.
10. Air clothing well before using.

FIGURE 5. *Instruction card*

3.6 **Workmanship.** The bag shall be well made, well finished, free from contamination (foreign matter) and damage such as tears, abrasions, or rips which would impair its use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Unless otherwise specified herein the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order.

4.1.1 *Supplier's responsibility.* The supplier is responsible for the examination and testing as prescribed herein except for those examinations and tests reserved for performance by the Government.

4.1.2 *Government's responsibility.* The Government will accomplish the examinations set forth in 4.4.1 and tests set forth in 4.4.2.

4.2 **Objective evidence.** The supplier shall present objective evidence as required by the Government representative that all material and components are in accordance with 3.1 and section 5 (see 6.3).

4.3 **Alternate inspection (including testing) procedures.** The supplier may utilize any alternate inspection procedure which will assure equal or better quality by submitting a written proposal with justification and obtaining written approval from the Government prior to its institution. In case of dispute, the procedures of the specification will govern.

4.4 **Preproduction sample inspection.**

4.4.1 *Examination.* Sample bags shall be inspected for all requirements of the specification.

4.4.2 *Tests.* Samples taken as specified in 4.5.2.2 shall be tested in accordance with 4.6.

4.4.3 *Acceptance/rejection criteria.* The items shall meet the examinations and tests specified by 4.4.1 and 4.4.2 to be acceptable. The supplier shall obtain written approval from the contracting officer before proceeding with regular production.

4.5 **Inspection provisions.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:14Z
Check the source to verify that this is the current version before use.

4.5.1 *Regular production lot.* A regular production lot shall consist of the delousing bags, produced by one manufacturer, from the same material, under essentially the same manufacturing conditions and submitted for acceptance at one time.

4.5.2 *Sampling.*

4.5.2.1 *Nondestructive examination or tests.* Sampling shall be conducted in accordance with Standard MIL-STD-105. The level and degree of inspection shall be as specified in the contract.

4.5.2.2 *Sample examination or tests.*

4.5.2.2.1 *Cloth.* A 5-yard sample of the coated cloth shall be taken at least 10 yards from the lead and end and 3 inches from the selvedge edge for testing as specified in 4.6.1 to 4.6.6, inclusive for each new lot of cloth.

4.5.2.2.2 *Stitches, seams and strapping.* With each lot of bags 3 twelve-inch seams and strapping shall be made for testing as specified in 4.6.6.2 and 4.6.6.4.

4.5.2.2.3 *Tie tapes.* With each lot of bags a tie tape assembly as shown in figure 2 shall be tested as specified in 4.6.6.3.

4.5.3 *Examination.*

4.5.3.1 *Bag.* Sample bags from the regular production lots shall be examined in accordance with the classification of defects and the AQL's as designated by this specification and with Standard MIL-STD-105.

4.5.3.2 *Cloth samples.* The samples, taken as specified in 4.5.2.2, shall be tested as specified in 4.6.

4.5.4 *Classification of defects.*

4.5.4.1 *Bag, delousing — assembly.* (Figs. 1, 2, 3, and 4).

Categories and defects

Major — AQL 1.5 percent defective.

1. Components missing, incorrect, or incorrectly located.

Major — AQL 1.5 percent defective.

2. Stitching inadequate or incorrect.
3. Cement inadequate or incorrect.
4. Coating coverage inadequate.
5. Damage (see 3.6).

Minor — AQL 4.0 percent defective.

51. Overall dimensions of bag incorrect.
52. Pocket incorrect or incorrectly assembled.
53. Tape loose or incorrectly secured.
54. Marking missing, inadequate, or incorrect.
55. Contamination (see 3.6).

4.5.4.2 *Preparation for delivery* (section 5).

Categories and defects

Major — AQL 2.5 percent defective.

1. Talcum powder missing or inadequately applied.
2. Containers incorrect.
3. Damaged containers.
4. Containers closure incorrect.
5. Quantity per container incorrect.
6. Marking missing, illegible, or incorrect.

Minor — AQL 6.5 percent defective.

51. Bag improperly folded or wrapped.

Incidental — AQL 10.0 percent defective.

101. Contamination.

4.6 Tests.

4.6.1 *Coating weight.* The coating weight of the finished cured fabric shall be determined in accordance with method 5040 of Specification CCC-T-191 utilizing the difference between the weights of the finished cloth after passing through the calender and the bare cloth.

4.6.2 *Breaking strength.* Specimens from each sample piece of cloth shall be taken in both the warp and filling direction for testing in accordance with method 5100 of Specification CCC-T-191.

4.6.3 *Tearing strength.* Specimens from each sample piece of cloth shall be taken in both the warp and filling direction for testing in accordance with method 5132 of Specification CCC-T-191.

4.6.4 *Width.* The width of the cloth shall be determined in accordance with method 5020 of Specification CCC-T-191.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:14Z
Check the source to verify that this is the current version before use.

4.6.5 *Thread count.* The thread count of the cloth shall be determined in accordance with method 5050 of Specification CCC–T–191.

4.6.6 *Adhesion tests.* The adhesion shall be measured as the average pull in pounds per inch required to separate the two plies of coated materials over a distance of 3 inches. The testing machine and its operation shall be as specified in method 5100 of Specification CCC–T–191 except that the jaws shall not be less than 2 inches wide.

4.6.6.1 *Adhesion of plies.* Specimens shall be taken in both the warp and filling directions and tested by method 5950 and supplemented by method 5100 of Specification CCC–T–191.

4.6.6.2 *Adhesion of cemented seams.* The adhesion of seams shall be determined by method 5960 and supplemented by method 5100 of Specification CCC–T–191.

4.6.6.3 *Tie tape strip adhesion.* Adhesion of the tie tape strip to the coated fabric shall be determined by methods 5950 and 5100 of Specification CCC–T–191.

4.6.6.4 *Strapping adhesion.* Strapping adhesion shall be determined by the procedure outlines in methods 5962 and 5100 of Specification CCC–T–191.

4.6.7 *Heat test.* A heat test shall be made on the coated fabric and coated seams. Specimens shall be tested in accordance with method 5872 of Specification CCC–T–191.

4.6.8 *Low temperature resistance.* Specimen cloth shall be tested in accordance with method 5874 of Specification CCC–T–191 with the following modifications: (a) The cloth shall be exposed to a temperature of — 20° F., (b) the steel roller shall be 2 inches in diameter and 2 inches long with a total weight, including the handle of 1½ pounds, and (c) the fold shall be located in the center of the specimen.

4.6.9 *Permeability.* The permeability of the fabric to hydrogen shall be determined by using method 5460 of Specification CCC–T–191.

4.6.10 *Acceptance/rejection criteria.* If the material submitted and the sample stitches fail to meet requirements of section 3 as tested in 4.6, the lot represented shall be rejected.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 *Level A.* Each delousing bag shall be liberally dusted with powdered talc conforming to Specification MIL–P–1755 and folded in such manner as to avoid insofar as possible any sharp creases or folds. Each folded bag shall then be wrapped in grade B, 30-pound basis weight, kraft wrapping paper conforming to Specification UU–P–268. The wrap shall be securely sealed with gummed tape conforming to Specification UU–T–111. Each wrapped bag shall be placed in a style IV, type A or B, class b or c, paperboard folding box, conforming to Specification PPP–B–566 or in a type I or II, class A or B paperboard setup box conforming to Specification PPP–B–676. Cartons shall be closed and secured with gummed tape conforming to Specification UU–T–111.

5.1.2 *Level B.* Not applicable.

5.1.3 *Level C.* Packaging of delousing bags shall be in accordance with the manufacturer's commercial practice.

5.2 Packing.

5.2.1 *Level A.* Ten delousing bags, individually packaged as specified in 5.1.1, shall be packed in a snug-fitting, style RSC, type I, class 3, V3c fiber box conforming to Specification PPP–B–636. Box closure shall be in accordance with the appendix to the box specification for exterior boxes. Additionally, all seams including the manufacturer's joint, shall be sealed by taping with type III, class 1

Source: https://assist.dla.mil -- Downloaded: 202610-22T20:14Z
Check the source to verify that this is the currentversion before use.

pressure-sensitive tape, color optional, Specification PPP-T-60, extending the tape over all corners and edges at least 3 inches.

5.2.2 *Level B.* Not applicable.

5.2.3 *Level C.* A uniform quantity of delousing bags, packaged as specified in 5.1.3, shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Containers used shall comply with Uniform Freight Classification Rules or other common carrier regulations applicable to the mode of transportation.

5.3 **Marking.** In addition to any special marking required by the contract or order, unit packages and shipping containers shall be marked in accordance with Standard MIL-STD-129.

6. NOTES

6.1 **Ordering data.** Procurement documents should specify the following:

(a) The title, number, and date of this specification.

(b) The level of protection required (see section 5).

6.2 **Advisory information.** The provisions of this specification must be met irrespective of the coating compound used. The coating compound should be synthetic rubber, suitably compounded and cured; resistant to methyl bromide and should have good aging characteristics.

6.3 **Objective evidence.** Provisions for objective evidence and inspection records, and maintenance of inspection records will be specified by the procuring activity.

6.4 **Pilot lot.** A pilot lot may be required to evaluate the supplier's production and quality control systems. The contracting officer will specify whether a pilot lot is required and applicable pilot lot acceptance criteria.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army—Chemical Corps
Navy—Bureau of Yards and Docks

Preparing activity:
Army—Chemical Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:14Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:14Z
Check the source to verify that this is the current version before use.