INCH-POUND

MIL-B-50653A (AR)
4 May 1990
SUPERSEDING
MIL-B-50653 (MU)
15 April 1971

MILITARY SPECIFICATION

BOARD, COMPONENT: 10548362

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a component board used in the Klystron Power Supply, a part of the Radar Set AN/VPS-2. The component board provides circuitry for generating trigger pulses to form the modulator pulse. The component board also provides circuitry for overload sensing and relay closures for overload protection (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, Manufacture and Inspection, General Specification for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document, should be addressed to: Commander U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1285

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-S-45743 - Soldering, Manual Type, High Reliability Electrical and Electronic Equipment
MIL-S-46844 - Solder, Bath Soldering of Printed Wiring Assemblies

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Military Specifications and Standards, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (See 6.4)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

10548336 - Klystron Power Supply
10548362 - Board, Component

PACKAGING DATA SHEET

P10548362- Packaging of Board, Component

(Copies of drawings, publications and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 10548362, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the component board shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances.
b. Inorganic protective surface finishings.
c. Part identification and marking.
d. Workmanship.
e. Soldering electrical connections.

3.3 Environmental service conditions.

3.3.1 Vibration. The component board shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
10 to 15 hertz	0.06 inches double amplitude
15 to 25 hertz	0.04 inches double amplitude
25 to 55 hertz	0.02 inches double amplitude

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% per decade.
The 10-55-10 hertz sweep time is 3 minutes 45 seconds ± 10%.

3.3.2 Shock. The component board shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, 11 milliseconds ± 10%, halfsine wave applied in each direction of 3 mutually perpendicular axes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

3.3.3 Altitude.

3.3.3.1 Operating. The component board shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

3.3.3.2 Non-operating. The component board shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The component board shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40 deg.F and +155deg.F.

3.3.4.2 Non-operating (storage). The component board shall not suffer permanent damage when subjected to the constant temperature extremes of -60 deg.F for a period of 24 hours and +160 deg.F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to and thermally stabilized at room ambient.

3.3.5 Humidity (non-operating). The component board shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the component board.

3.5 Performance.

3.5.1 Input and output characteristics. The component board shall provide main and delayed gated trigger outputs synchronized with the radar system timing signals. The component board shall also provide HV power supply overload signals that will sense an overload condition, and shall latch up relays providing closures to lamp indicator circuits. When supplied with the inputs specified in Table I, the component board shall yield the outputs specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

3.6 First article inspection. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Workmanship. The workmanship requirements of MIL-F-13926, MIL-S-45743 and MIL-S-46844 shall apply.

TABLE I. Input and output characteristics.

REQUIREMENT	CHARACTERISTIC	TERMINALS
Input voltage	+28 ± 0.1 Vdc regulated, capacity 200 mA.	E19(+), E3(Ret)
	+6 Vdc ± 0.1 Vdc regulated, capacity 150 mA min.	E13(+) E4(Ret)
	+6 Vdc ± 0.1 Vdc regulated, capacity 150 mA min.	E9(+) E4(Ret)
Input reset voltage	+28 ± 0.1 Vdc regulated, capacity 25 mA.	E15(+) E3(Ret)
Input signals, trigger	Amplitude: +25 ±1 V pulse. Pulse width: 0.6 ± 0.1 us. PRF: 20 ± 1 KHz. Rise time: 0.03 us max.	E5 E7 (shld.)
Output signals		
Main trigger output	Amplitude: +4.5 ± 1 V pulse. Pulse width: 1.25 ± 0.35 us. PRF: 20 ± 1 KHz. Rise time: 0.05 max. us at 50% points.	E6 E3 (shld.)
Delayed trigger output	Amplitude: 9 ± 1 V pulse. Pulse width: 1.5 ± 0.3 us. PRF: 20 ± 1 KHz. Rise time: .05 us max. at +6.5 volt level. Delay: 22 ± 4 us between leading edge of main trigger and leading edge of delay trigger.	E2 E4 (shld.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

TABLE I. Input and output characteristics (continued).

Overload output signals		
HV overload	Relay closures, +28 ± 1 Vdc.	E18
Mod. overload	Relay closure, +28 ± 1 Vdc.	E11

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5 and all applicable drawings. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	Temperature	+50°F to +90°F
b.	Relative Humidity	90% RH Max.
c.	Pressure	28 to 32 inches of Hg

4.3 First article inspection.

4.3.1 First article submission. The contractor shall submit a first article sample as designated by the contracting officer consisting of three (3) component board for inspection in accordance with 4.3.2.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon failure of any assembly, component or test specimen to comply with any of the stated requirements.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and the same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examination and tests.

4.4.2.1 Components, assemblies and subassemblies. All components, assemblies, and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the contractor after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.

TABLE II. Functional tests (100 percent inspection).

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
101. Electrical	3.4	4.7.2
102. Performance	3.5	4.7.3
Minor:	None	N/A

4.5 Special sampling. One component board out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests in Table II and shall then meet the requirements and tests of Table III. Unless otherwise specified in the contract, the items shall be returned to the lot upon successful completion of testing.

TABLE III. Special sampling.

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:		
103. Vibration	3.3.1	4.7.1.1
104. Shock	3.3.2	4.7.1.2
105. Altitude	3.3.3	4.7.1.3
106. Temperature	3.3.4	4.7.1.4
107. Humidity (non-operating)	3.3.5	4.7.1.5
Minor:	None	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

4.5.1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the standard test equipment listed in Table IV (Test Equipment list) shall be utilized in the performance of the applicable test methods of 4.7 (see Figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.


TABLE IV. Test equipment list.

ITEM NUMBER	DESCRIPTION
1. Power supply	0 to 30 Vdc, regulated; ac ripple less than 50 mV peak-to-peak; 500 mA current capacity.
2. Power supply	0 to 10 Vdc, regulated; ac ripple less than 50 mV peak-to-peak; 500 mA current capacity.
3. Pulse generator	Minimum positive pulse amplitude: +30 V. Pulse width: adjustable from 0.2 to 20 us. Rise time: 0.06 us max. PRF: 20 KHz.
4. Oscilloscope	Dual channel. Vertical rise time: 50 us max. Sweep lengths: 1.0 us, 10 us and 50 us. Scope probe: 10 megohm input resistance.
5. Voltmeter/Ohmeter	0 to 50 Vdc, accuracy 0.1% of reading.
6. Test harness	See Figure 2. See Table V for test harness parts list.

TABLE V. Test harness parts list.

DESIGNATION	PART	DESCRIPTION
DS1, DS2	Lamp and cartridge	28 V at 40 mA.
E1, E4	Binding post	E. F. Johnson, 111-102 (red)
E2, E3	Binding post	E. F. Johnson, 111-103 (black)
J1, J2, J3	Connector	UG290A, BNC.
R1	Resistor	RC32GF100J
R2	Resistor	RC32GF300J
S1	Switch	DPST
S2	Switch	Pushbutton, momentary SPST NO.
S3	Switch	SPDT center off

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

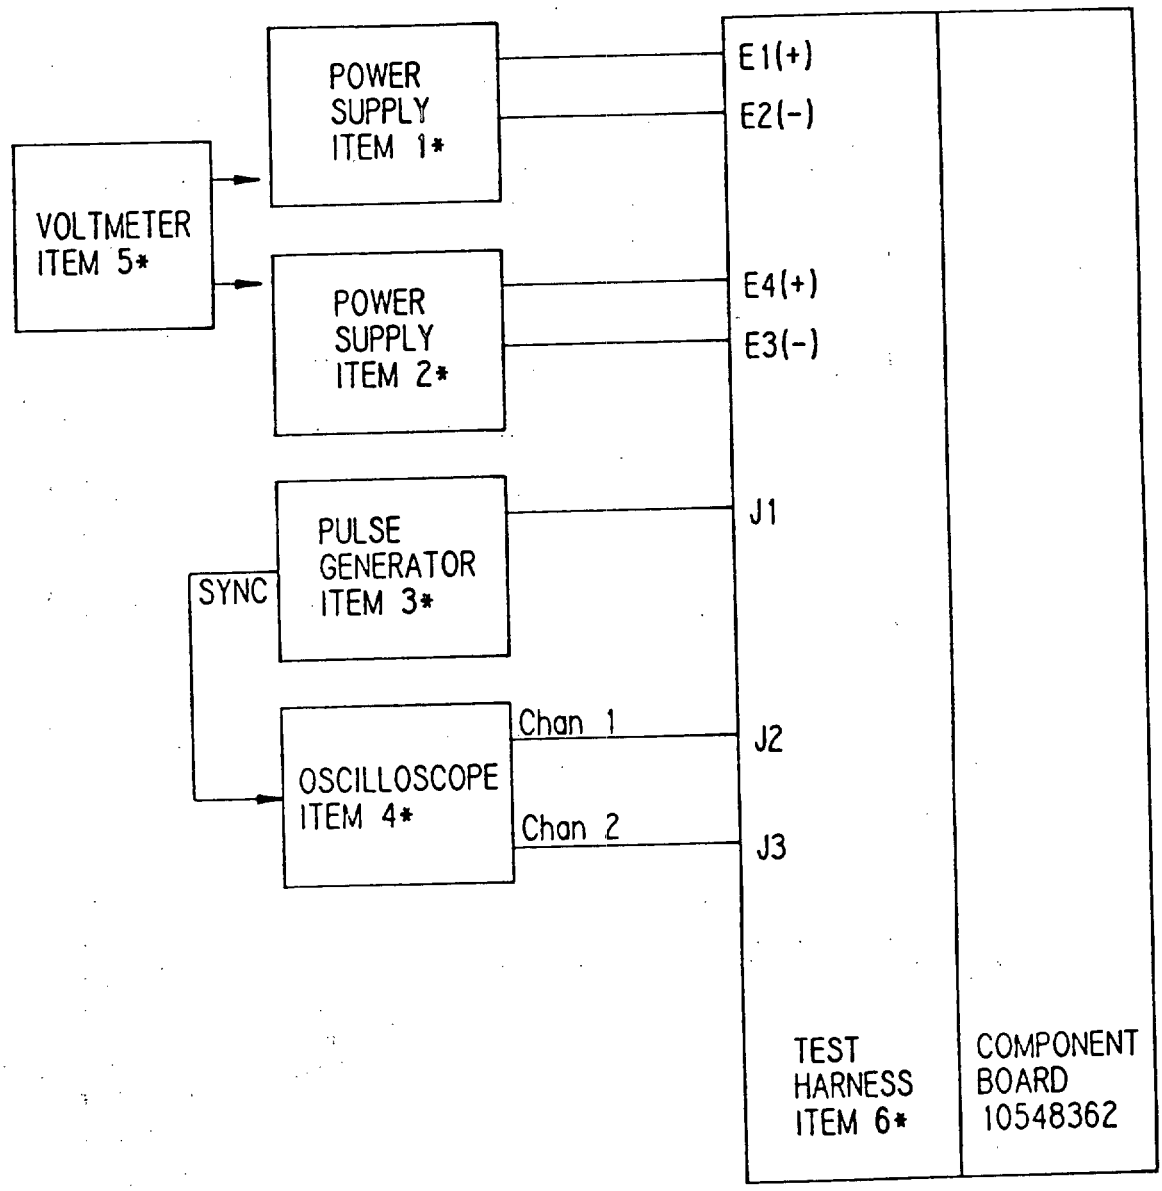

*Refer to 4.6.2.3

FIGURE 1. Component board test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

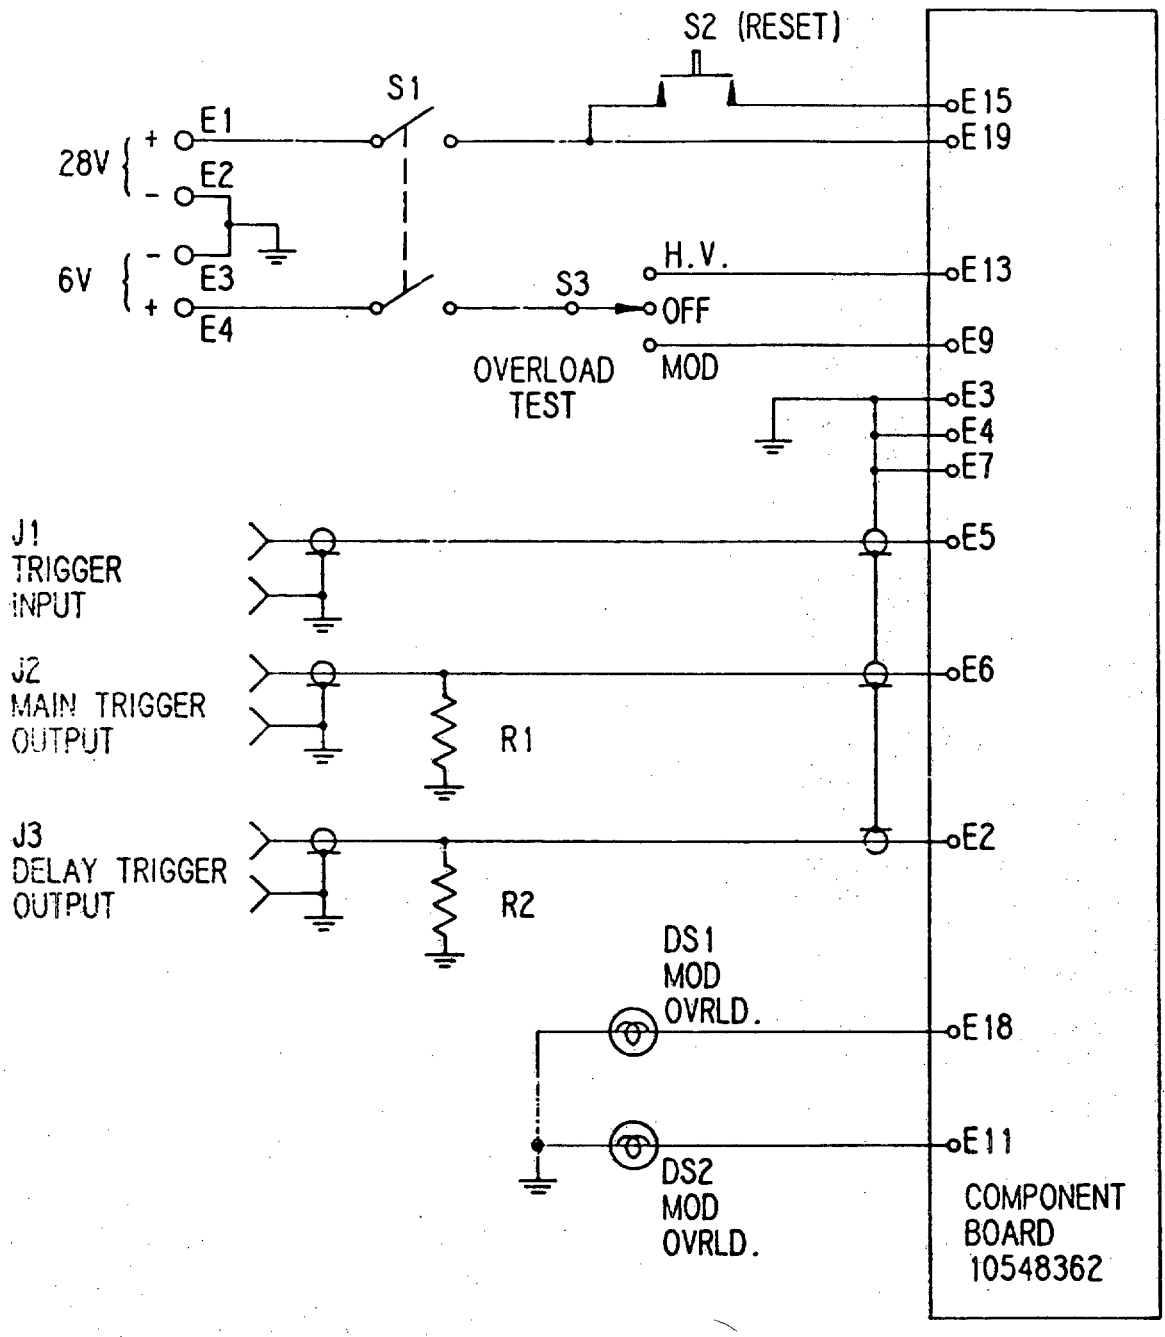


FIGURE 2. Test harness.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810, except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

4.7.1.1 Vibration. The test shall be performed as specified in Method 514.3, Category 8, Procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of Procedure I only Steps 4 through 8 of paragraph II-2.1 apply. The component board shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the component board shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

4.7.1.2 Shock. This test shall be performed as specified in Procedure I, Section II of Method 516.3 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.

c. The maximum g shall occur at 5.5 milliseconds ±10%.

d. The shock measuring system shall have a flat frequency response within ±10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the component board shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating). This test shall be performed as specified in Procedures II and III, Method 500.2 of MIL-STD-810. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 501.2 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502.2 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating). This test shall be performed in accordance with Procedure III, Method 507.2 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment (see Table IV) and visual examination for compliance with 3.4.

4.7.3 Performance. The selected board assemblies shall be tested as follows:

4.7.3.1 Input and output characteristics. Connect test equipment (Table IV, items 1 thru 6) as shown in Figure 1. Turn switches S1 and S3 of test harness, item 6, to the OFF position. Connect the pulse generator (Table IV, item 3) to the oscilloscope (Table IV, item 4) and set up the pulse generator output as specified in Table I. Adjust the power supply voltages as specified in Table I.

4.7.3.2 Main trigger output. Switch the oscilloscope (Table IV, item 4) to channel 1 and verify that the output pulse has the following characteristics:

PRF: 20 ± 1 KHz
Amplitude: +4.5 ± 1 V
*Width: 1.25 ± 0.35 us
Rise time: 0.05 us max. at 50% points

4.7.3.3 Delay trigger output. Switch the oscilloscope (Table IV, item 4) to channel 2 and verify that the delay output pulse has the following characteristics:

PRF: 20 ± 1 KHz
Amplitude: +9 ± 1 V
*Width: 1.5 ± 0.3 us
Rise time: 0.05 us max. at 6.5 V level

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

*For pulse widths of 4.7.3.2 and 4.7.3.3, select resistors R22 and R33 for minimum pulse width at -40 deg.F. For resistor values refer to parts list, P/L 10548362.

4.7.3.4 Delay performance test. Connect the oscilloscope (Table IV, item 4) to external sync between main trigger output and switch to alternate mode sweep. Verify that the delay between main trigger rise time and the delay trigger rise is 22 ± 4 us.

4.7.3.5 High voltage overload. Recheck the +28 V and the +6 V inputs. Switch S3 on test harness (Table IV, item 6) to HV position and verify that the HV indicator lamp, DS-1, is lit and remains lit. Turn S3 on test harness (Table IV, item 6) to the OFF position. Push S2 on item 6, reset button and verify that the HV overload indicator DS-1 goes out and remains out.

4.7.3.6 Modulator overload.

a. Switch S3 on test harness (Table IV, item 6) to the MOD position, and verify that the modulator overload indicator lamp DS-2 is lit and remains lit. Turn switch S3 on test harness (Table IV, item 6) to the OFF position.

b. Push switch S2 on test harness (Table IV, item 6) reset button and verify that the modulator overload indicator DS-2 goes out and remains out.

c. Switch S3 on test harness (Table IV, item 6) to MOD, then to HV and then to OFF and verify that both DS-1 and DS-2 are lit and remain lit.

d. Reset switch S2 on test harness (Table IV, item 6) and verify that both indicators go out and remain out. Repeat tests several times.

5. PACKAGING

5.1 General. Preservation, packing and marking shall be in accordance with Packaging Data Sheet 10548362.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The component board is an integral board assembly within the Klystron Power Supply, a subsassembly of the Radar Set AN/VPS-2. The component board produces the main and delayed trigger outputs with respect to the timing synchronizing

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

signals to produce the modulator output pulse. The component board also provides the necessary circuitry and relay closures for the protection of the high voltage and modulator when an overload is sensed.

6.2 Acquisition requirements. Procurement documents shall specify the following.

6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. Applicable stock number.
c. First article sample requirements.
d. Packaging requirements, if other than specified in Section 5.
e. Serialization requirements, if applicable.
f. Certificate of conformance for each lot or shipment of product.

(Data item descriptions related to this specification and identified in Section 6, will be approved and listed as such in DOD 5000.19L, Volume II, AMSDL. Copies of data item descriptions required by contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, Attn: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.5 Subject term (Key word) listing.

Component board
Radar Set, AN/VPS-2
Klystron Power Supply

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A671)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-B-50653A (AR)	2. DOCUMENT DATE (YYMMDD) 4 MAY 1990

3. DOCUMENT TITLE
BOARD, COMPONENT: 10548362

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME US ARMY ARDEC STANDARDIZATION & SPECIFICATION OFFICE	b. TELEPHONE *(Include Area Code)* (1) Commercial: (201) 724-6674 (2) AUTOVON: 880-6674
c. ADDRESS *(Include Zip Code)* ATTN: SMCAR-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/29

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:32Z
Check the source to verify that this is the current version before use.