MIL-C-60104A(AR)
AMENDMENT 5
2 December 1983
SUPERSEDING
AMENDMENT 4
1 May 1969

MILITARY SPECIFICAITON

Containers, Shipping, Reuseable:
8246020 and 10539215

This amendment forms a part of Military Specification MIL-C-60104A(MU) dated 10 August 1967 and is approved for use by the US Army Armament Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 1

2.1: Add the following specification and drawing:

"MIL-R-6130	Rubber, Chemically Blown
C10556000	Latch, Assembly"

PAGE 3

* 3.2: Line 2: Delete "press laminated" and substitute "extruded".

Line 6: Delete "press laminated" and substitute "extruded".

* 3.2.1: Line 1: Delete "olive drab conforming to Color X24087 of FED-STD-595" and substitute "forest green conforming to Color 34079 of FED-STD-595, except for gloss"

Line 4: Add the following sentence: "Do not apply finish to extrusion wells in the area where the sealant and primer is applied."

PAGE 5

* 3.3.2.1: Line 2: Delete "Color X24087 of FED-STD-595" and substitute "Color 34079 of FED-STD-595, except for gloss"

3.3.2.2: Delete in its entirety and substitute the following:

"3.3.2.2 Extrusion attachment. The sealing extrusions shall be attached to the container shells with a two part silicone sealant conforming to General Electric RTV 560 with primer SS4004 or approved equal."

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

PAGE 5

* 3.3.3 and 3.3.3.1: Delete in its entirety and substitute the following:

"3.3.3 Latches. Twelve (12) latches conforming to Drawing C10556000 shall be located and secured to lower sealing extrusion as shown on Figure 1. The latch incorporates a spring detent in the base plate which engages into provided offset in sealing extrusion when the latch is positioned into the extrusion rail. Stake the extrusion rail in two (2) places to prevent lateral movement of latch base plate. Each latch shall be properly adjusted and cotter pinned to assure uniform pressure on sealing gasket. Touch-up paint shall be applied to stake marks with paint conforming to TT-E-529, Color 34079 of FED-STD-595, except for gloss.

3.3.3.1 Latch finish. Latches shall be finished prior to assembly to container by Finish No. 21.3 of MIL-STD-171. Top coat paint color shall be 34079 of FED-STD-595, except for gloss."

* 3.3.4: Line 7: Delete "X24087 of FED-STD-595" and substitute "Color 34079 of FED-STD-595, except for gloss."

Line 9: Delete "Color X24087 of FED-STD-595" and substitute "Color 34079 of FED-STD-595, except for gloss."

PAGE 6

* 3.3.5: Line 1: Delete first sentence and substitute: "Gasket shall be 1/2 inch diameter rubber conforming to Type II, Grade A, Condition-Soft of MIL-R-6130."

Line 5: Delete "MIL-A-5092, Type II" and substitute "MMM-A-1617 Type II".

Line 6: Delete "MIL-A-5092, Type II" and substitute "MMM-A-1617 Type II".

3.5 Delete in its entirety and substitute the following:

"3.5 Marking. Marking legends shown on Figure 1 shall be applied by silk screen or stencil with paint conforming to TT-E-529, color white 27875 of FED-STD-595."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

PAGE 7

3.7.1: Line 3: Delete "-80°F." and substitute "-65°F."

PAGE 11

4.6.3.b: Line 2: Delete "-80°F" and substitute "-65°F."

Line 5: Delete "-80°F" and substitute "-65°F."

PAGE 13

* Figures 1, 2, 3, 4, 5, 6, 7, 8, 9, and 10: Delete and substitute the attached "Figures 1, 2, 3, 4, 5, 6, 7, 8, 9, and 10."

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.


Custodian:
Army-AR

Preparing Activity:
Army-AR

(Project 1220-A294)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

NOTES:
1. MARKING SHALL BE AS APPLIED AS SPECIFIED IN PAR 3.5
2. MARKING LEGEND-MARKING LEGEND FOR TYPE I CONTAINER SHOWN. MARKING LEGEND FOR TYPE II CONTAINER AS FOLLOWS:
"REUSABLE CONTAINER
FSN-4931-071-8158
FOR
TEST SET, COMPUTER LOGIC UNIT
AN/GSM-90
HANDLE WITH CARE"
CHARACTERS TO BE UPPER CASE VERTICAL GOTHIC, WITHOUT SERIFS
3. ALL PRODUCTION CONTAINERS SHALL BE PRESSURIZED TO 1 PSI AND TESTED IN ACCORDANCE WITH PAR 3.6

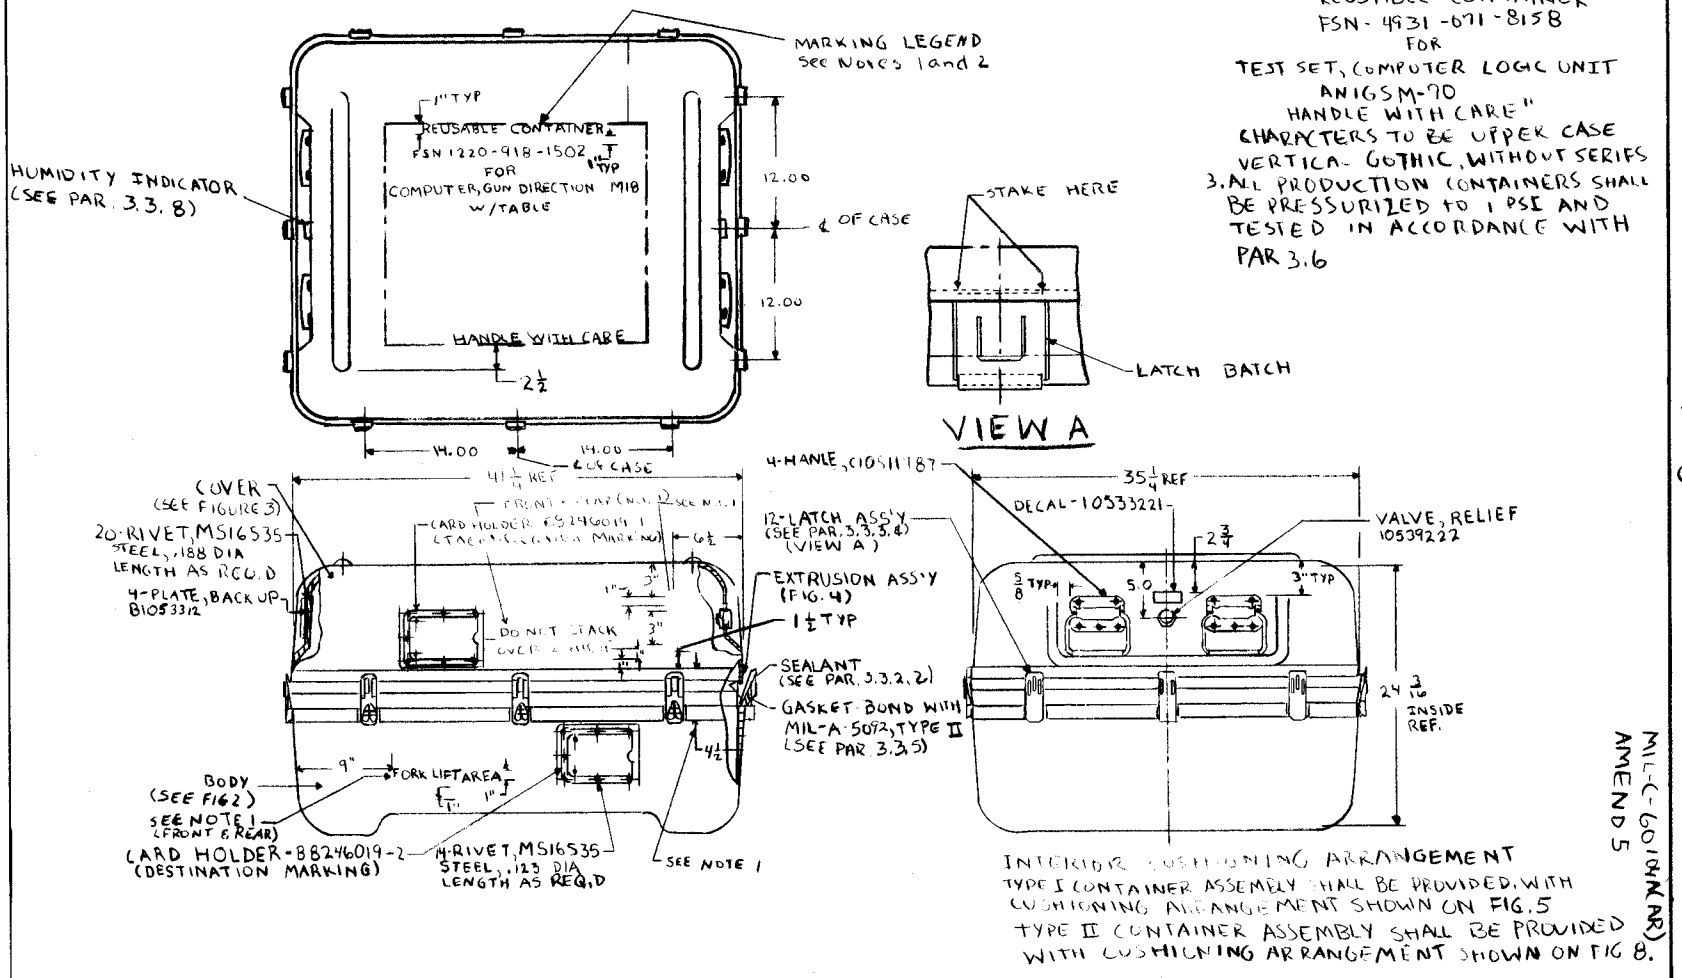

INTERIOR CUSHIONING ARRANGEMENT
TYPE I CONTAINER ASSEMBLY SHALL BE PROVIDED WITH CUSHIONING ARRANGEMENT SHOWN ON FIG. 5
TYPE II CONTAINER ASSEMBLY SHALL BE PROVIDED WITH CUSHIONING ARRANGEMENT SHOWN ON FIG 8.

FIG. 1- CONTAINER ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

NOTES:
1-ALL PRODUCTION SHELLS SHALL BE INTERCHANGEABLE WITHIN .06 AND FIT FIG. 4.
2-MATERIAL SHALL BE AS SPECIFIED IN PAR 3.2 STARTING THICKNESS .375±.010 COLOR-FOREST GREEN 34079 OF FED-STD-595, EXCEPT GLOSS FINISH-HAIRCELL GRAIN EXTERIOR, SMOOTH INTERIOR.
*FORMED THICKNESS MEASURED TOP PORTION .160 ±.020.
3-TOLERANCE UNLESS OTHERWISE SPECIFIED DECIMALS .X ±.06, .XX = ±.03 ANGLES = ±1°0'.

SUGGESTED MATERIAL SOURCE:
UNIROYAL
P.O.BOX 958, RTE 15N
WARSAW, IN 46580
PART NO. R40-4563.

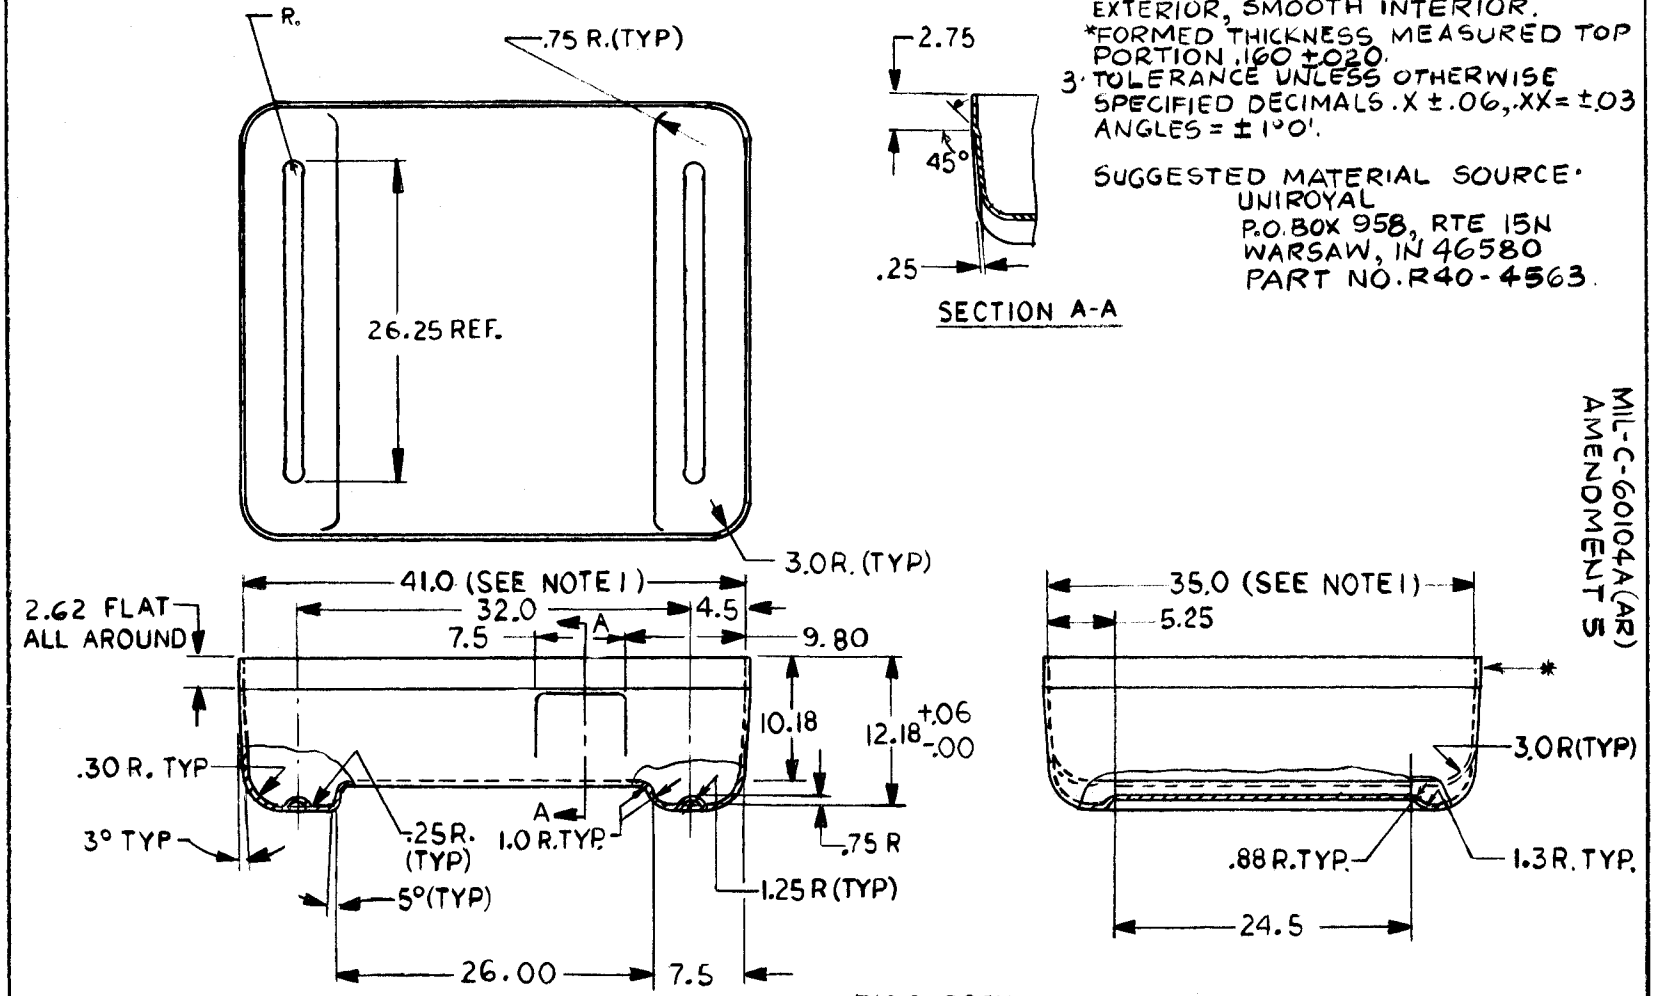


FIG. 2-BODY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

NOTES:
1. ALL PRODUCTION SHELLS SHALL BE INTERCHANGEABLE WITHIN .06 AND FIT FIG. 4
2. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.2
   STARTING THICKNESS .375 ±.010
   COLOR - FOREST GREEN 34079 OF FED-STD-595 EXCEPT FOR GLOSS FINISH - HAIRCELL GRAIN EXTERIOR, SMOOTH INTERIOR
   FORMED - THICKNESS MEASURED TOP PORTION .160 ±.020
3. TOLERANCE UNLESS OTHERWISE SPECIFIED:
   DECIMALS .X = ±.06, .XX = ±.03
   ANGLES ±1°0'
   SUGGESTED MATERIAL SOURCE:
   UNIROYAL
   P.O.BOX 958, RTE 15N
   WARSAW, IN 46580
   PART NO R40-4563



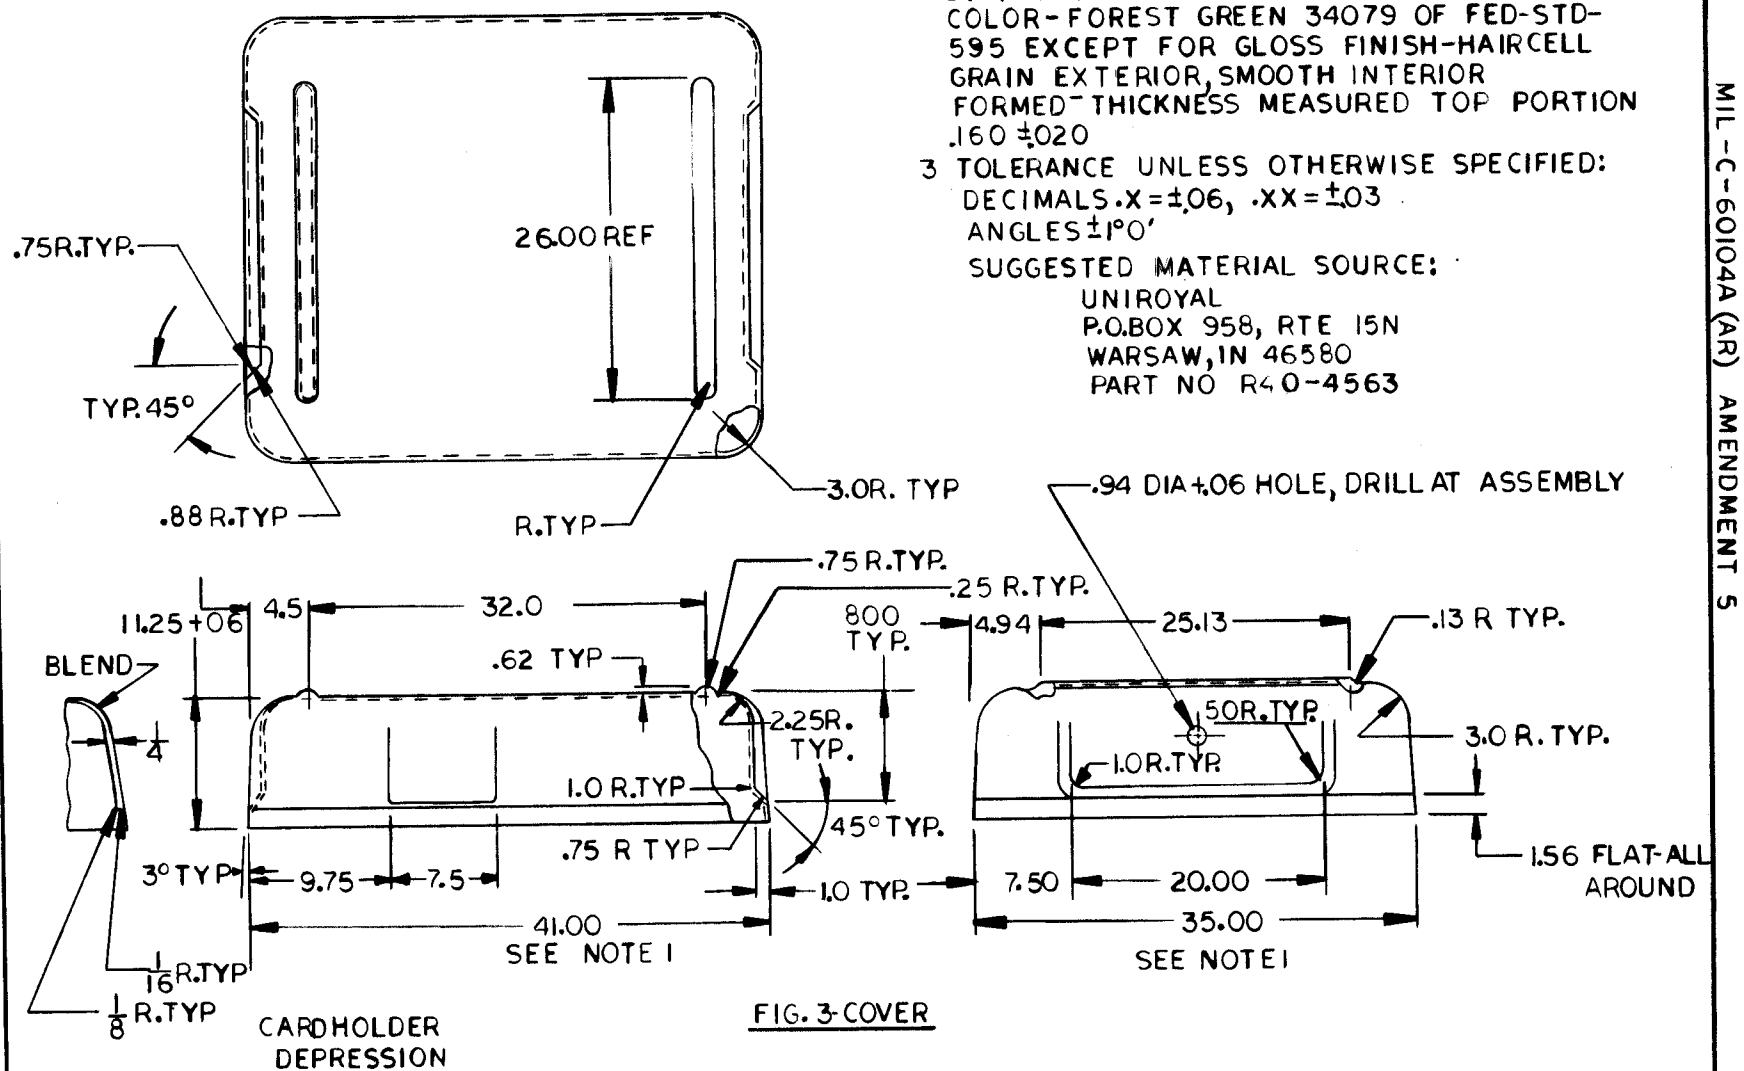


FIG. 3-COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

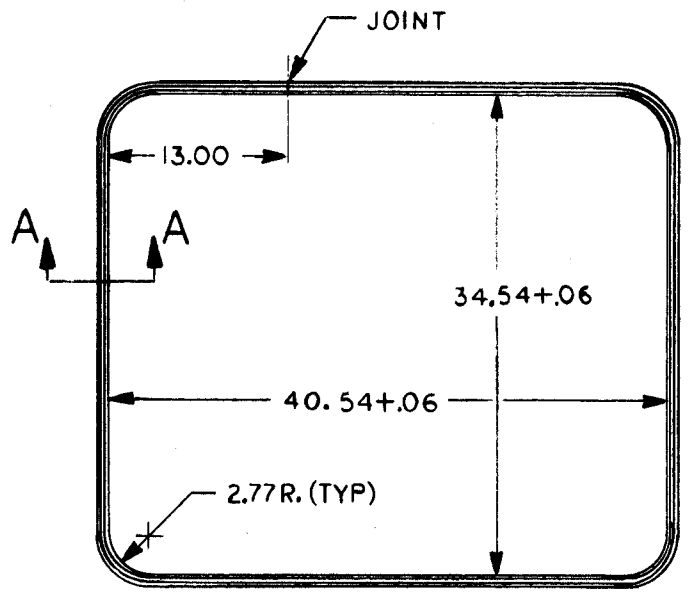

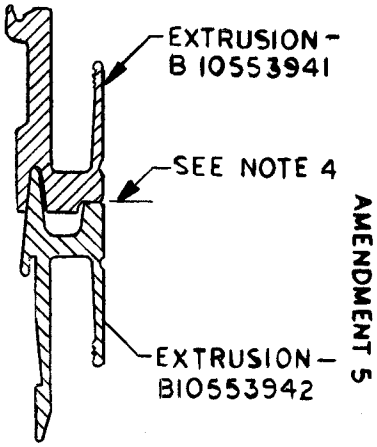


PARTIAL SECTION A-A
(TYPICAL)

NOTES:
1-COMPLETED EXTRUSIONS SHALL FIT FREELY INTO EACH OTHER AS SHOWN IN TYPICAL SECTION A-A.
2-MUST MATCH SHELLS (FIGS. 2 & 3).
3-EXTRUSIONS SHALL BE FORMED, WELDED AND FINISHED IN ACCORDANCE WITH PARA. 3.3.2 AND 3.3.2.1.
4-SURFACE SHOWN SHALL BE FLAT WITH .020 INCHES T.I.R IN ANY 6 INCHES OF LENGTH AND .030 INCHES T.I.R OVER ENTIRE LENGTH OF ANY SIDE OR END.

FIG.4 EXTRUSION ASSEMBLIES

MIL-C-60104A (AR)
AMENDMENT 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

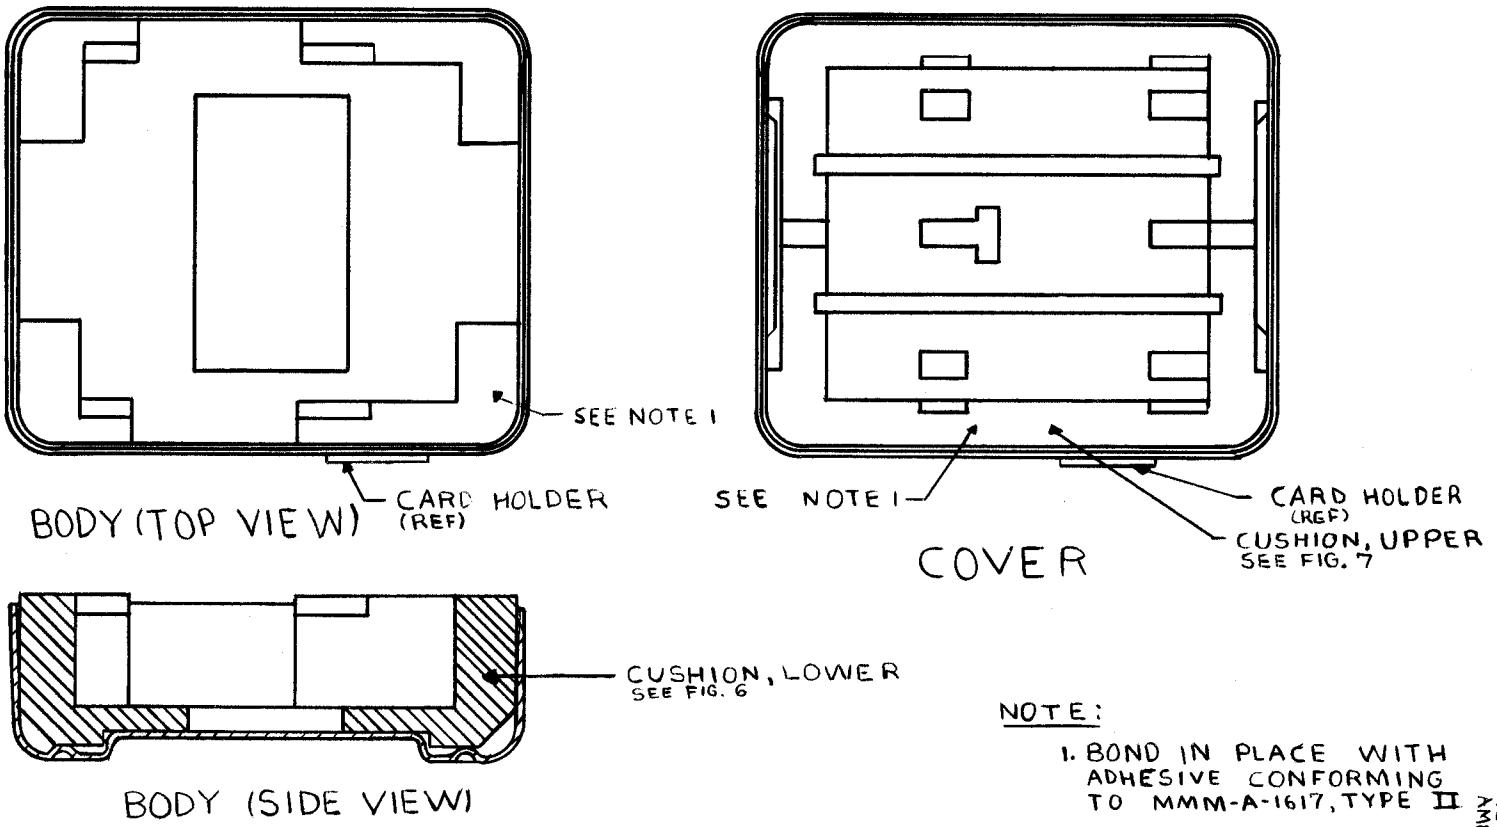

NOTE:


1. BOND IN PLACE WITH ADHESIVE CONFORMING TO MMM-A-1617, TYPE II

FIG. 5 CUSHION ARRANGEMENT

(FOR TYPE I CONTAINER ASSEMBLY)

MIL-C-60104A(AR) AMENDMENT 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

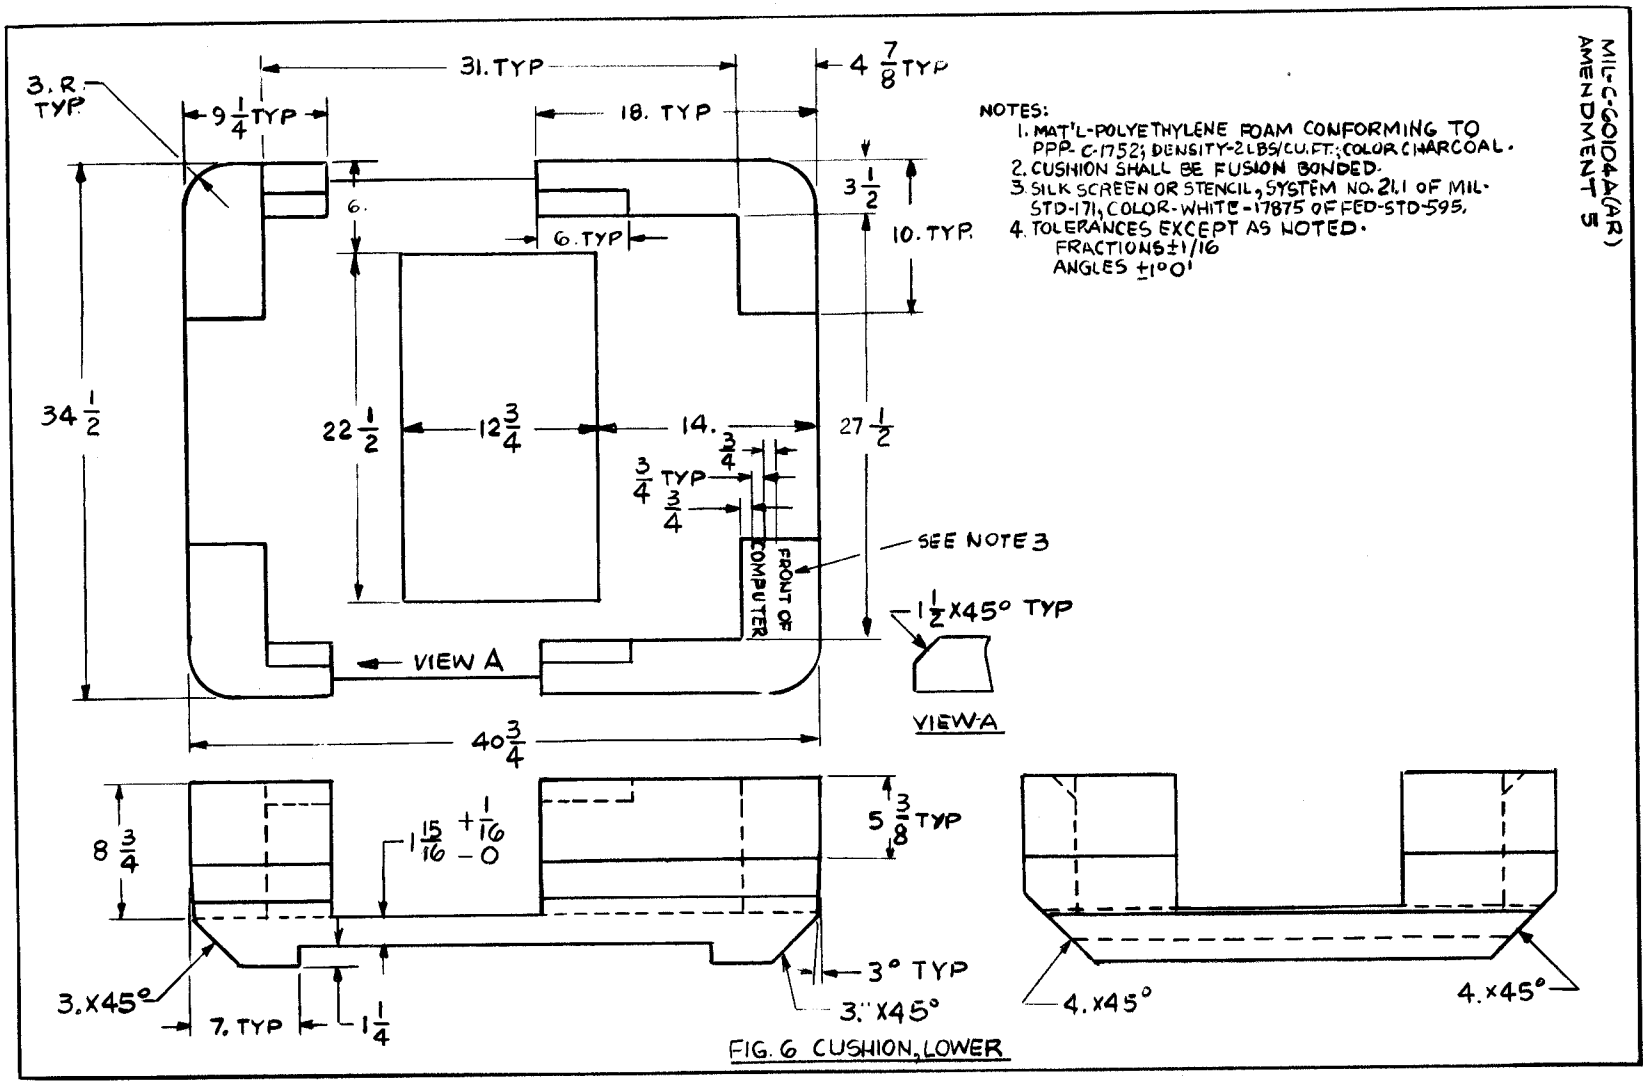


NOTES:
1. MAT'L-POLYETHYLENE FOAM CONFORMING TO PPP-C-1752; DENSITY-2 LBS/CU.FT.; COLOR CHARCOAL.
2. CUSHION SHALL BE FUSION BONDED.
3. SILK SCREEN OR STENCIL, SYSTEM NO. 21.1 OF MIL-STD-171, COLOR-WHITE-17875 OF FED-STD-595.
4. TOLERANCES EXCEPT AS NOTED.
   FRACTIONS ±1/16
   ANGLES ±1°0'


FIG. 6 CUSHION, LOWER

MIL-C-60104A (AR)
AMENDMENT 5


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

NOTES:
1. MAT'L - POLYETHYLENE FOAM CONFORMING TO PPP-C-1152; DENSITY 2 LBS/CU. FT.; COLOR - CHARCOAL.
2. CUSHION SHALL BE FUSION BONDED.
3. TOLERANCES EXCEPT AS NOTED, FRACTIONS ± 1/16 ANGLES ± 1° 0'

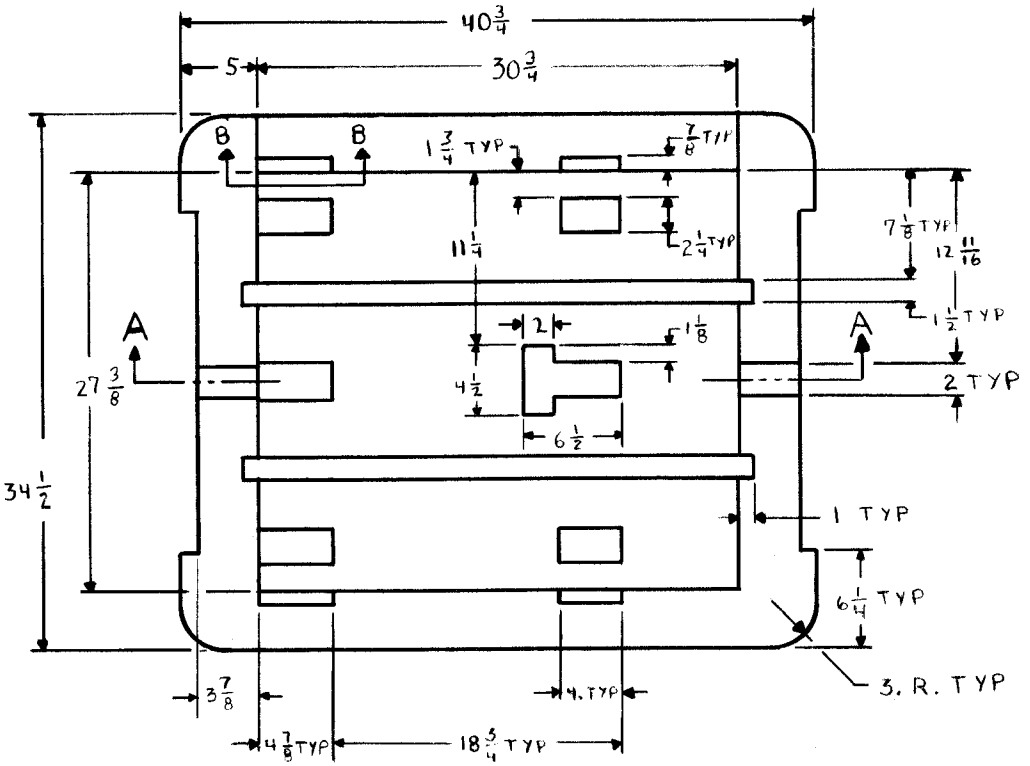

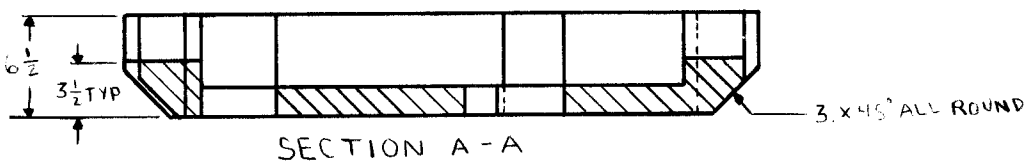

SECTION A-A



SECTION B-B

FIG 1 CUSHION DETAIL

MIL-C-60104A (AR)
AMENDMENT 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

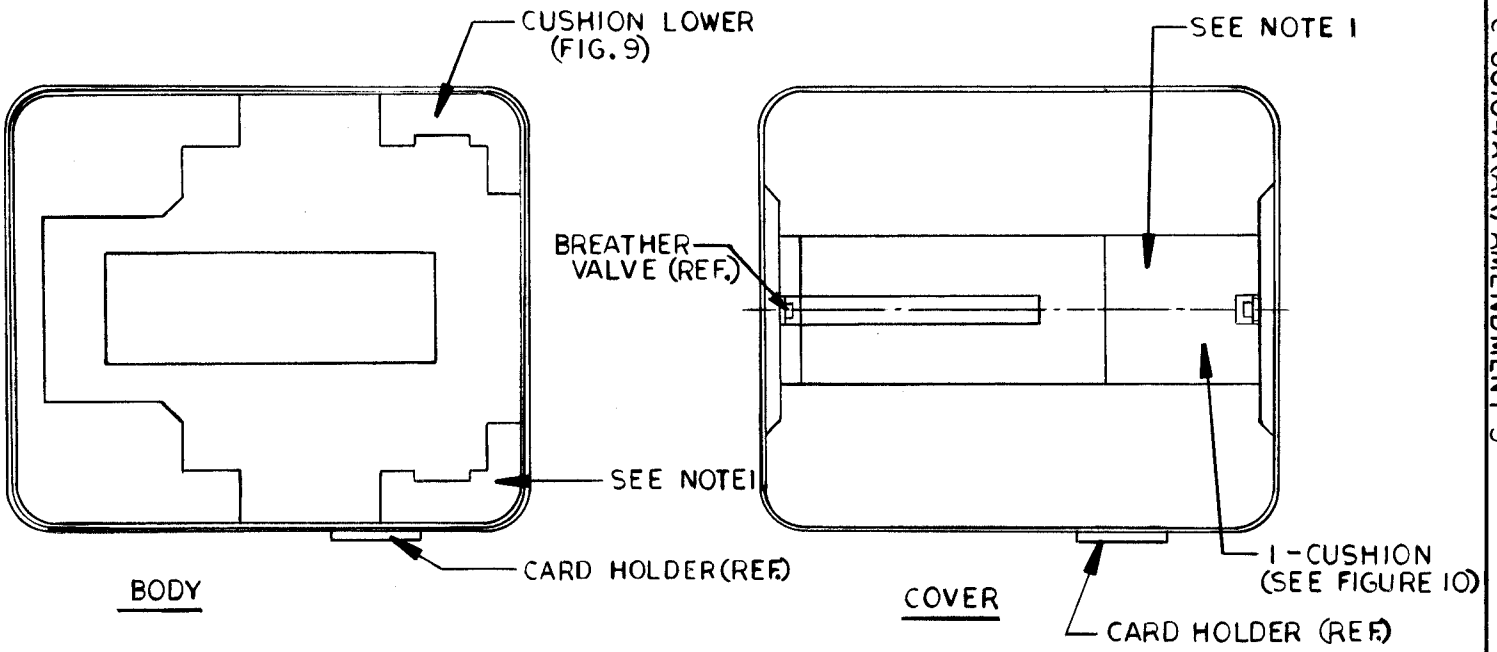


FIG. 8 CUSHION ARRANGEMENT
(FOR TYPE II CONTAINER ASSEMBLY)

NOTE:
1 BOND IN PLACE WITH ADHESIVE CONFORMING TO MMM-A-1617, TYPE II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

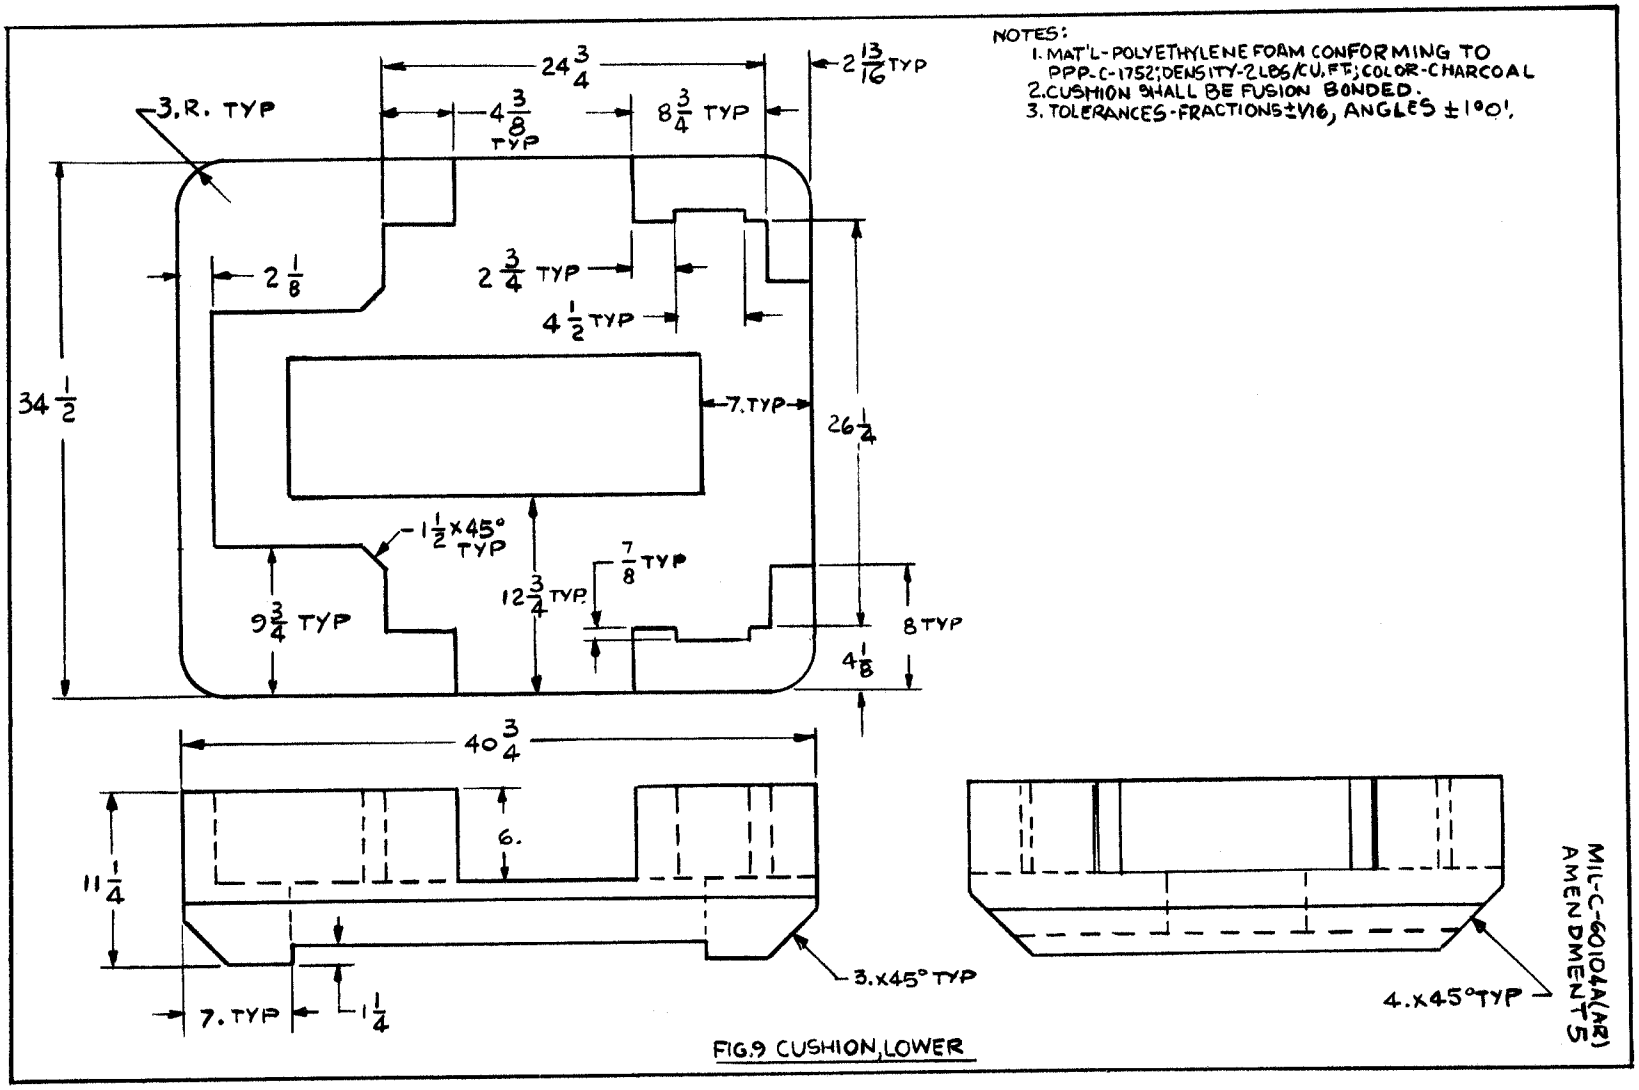


FIG.9 CUSHION, LOWER

MIL-C-60104A(AR)
AMENDMENT 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:09Z
Check the source to verify that this is the current version before use.

NOTES:
1. MAT'L - POLYETHYLENE FOAM CONFORMING TO PPP-C-1752; DENSITY - 2LBS CU. FT. COLOR - CHARCOAL.
2. CUSHION SHALL BE FUSION BONDED.
3. TOLERANCES - FRACTIONS ± 1/16.

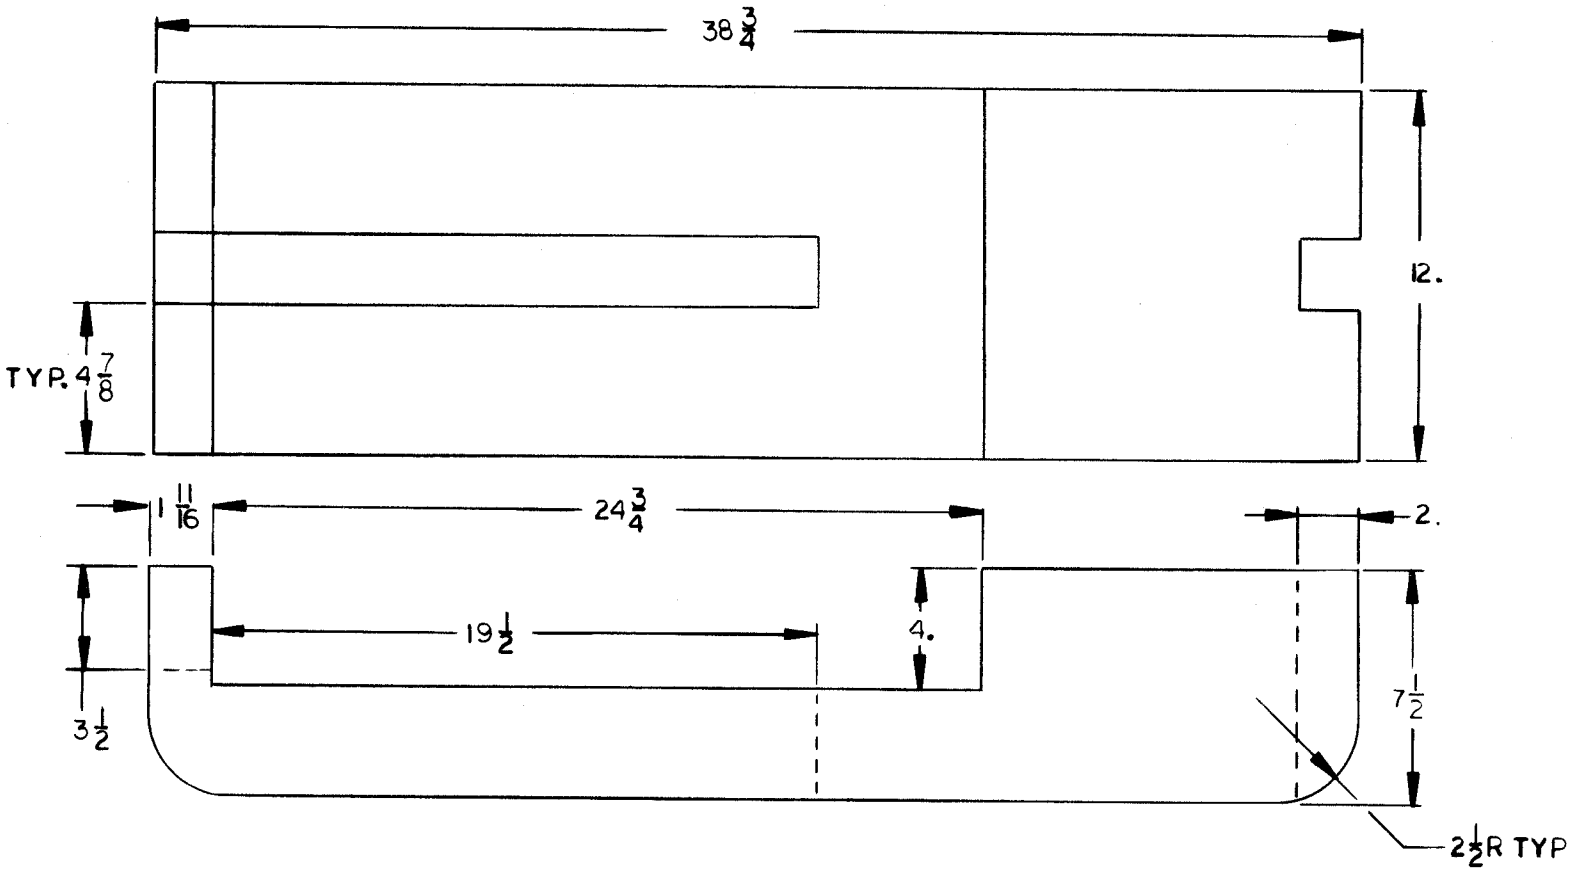


FIG. 10 CUSHION, UPPER

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:09Z
Check the source to verify that this is the currenterosion before use.