MILITARY SPECIFICATION

CASE, CARRYING: 10527433

1. SCOPE

1.1 This specification covers the fabrication and testing of one type carrying case for Computer, Gun Direction: M18 spare circuit boards and miscellaneous repair parts (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

QQ-A-250/8	Aluminum Alloy 5052,Plate and Sheet
TT-E-529	Enamel, Alkyd, Semi-Gloss
MMM-A-132	Adhesives, Heat Resistant, Airframe Structural, Metal to Metal

Military

MIL-R-3065	Rubber, Fabricated Parts
MIL-A-5092	Adhesive, Rubber Base, General Purpose
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification for
MIL-W-8604	Welding of Aluminum Alloys, Process For
MIL-F-13926	Fire Control Materiel, General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment, and Tools for Ordnance Materiel; Packaging of
MIL-C-21567	Compound, Silicone, Soft Film
MIL-M-22544	Molding Plastic,Acrylonitrile-Butadiene-Styrene, Rigid
MIL-B-23362	Brazing of Aluminum, and Aluminum Alloys
MIL-P-26514	Polyurethane Foam, Rigid or Plastic, For Packaging
MIL-I-45607	Inspection Equipment, Supply and Maintenance of

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-108	Definitions of and Basic Requirements for Enclosures for Electric and Electronic Equipment
MIL-STD-109	Quality Assurance Terms and Definitions
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-171	Finishing of Metal and Wood Surfaces
MS 15795	Washer, Flat-Metal, Round, General Purpose
MS 16535	Rivet, Tubular, Oval Head

DRAWINGS

U.S. Army, Frankford Arsenal

A10527433	Case, Carrying for Gun Direction Computer: M18 (Repair Parts)
A10539222	Valve, Relief
A10547130	Plate, Valve Instruction
B8627549	Bumper
B10511982	Bumper
B10539157	Extrusion Edge, Female
B10539158	Extrusion Edge, Male
C10527450	Handle Assembly
C10539217	Clamp Assembly
D10540474	Hinge Assembly

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from procuring activity or as indicated by contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

American Society of Testing Materials

D256	Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543	Test for Resistance of Plastics to Chemical Reagents

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

D638	Test for Tensile Properties of Plastics
D648	Test for Deflection Temperature of Plastics Under Load
D785	Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792	Test for Specific Gravity and Density of Plastics

(Copies of tests may be obtained from American Society of Testing Materials, 1916 Race Street, Philadelphia, Pa. 19103).

3. REQUIREMENTS

3.1 Carrying case.- Carrying cases shall be fabricated to assure a pressure and watertight case with provisions for indexing circuit boards and stowage of miscellaneous repair parts. The case assembly shall be fabricated and assembled in accordance with the requirements specified herein and Figures 1, 1A, 2, 3, 4, 5, 6, 7, 7A, 8 and 9.

3.2 First article testing.- Requirements for submission of first article samples for testing shall be as specified in the contract.

3.3 Material.- Material used for forming case shells shall be pressed laminated sheets formed by polymers or blends of polymers, produced from acrylonitrile-butadiene-styrene. The material shall not be adulterated, extended, or in any way modified with materials other than pigments which shall not exceed 5% by weight exclusive of pigments. Materials used for processing into pressed laminated sheets shall be virgin stock. Certification of materials of each lot procured for production requirements shall be available to the Government. The property values shall meet the minimum requirements specified in Table I.

TABLE I

DETAIL REQUIREMENTS FOR RIGID ABS PLASTICS

	ASTM METHOD*	
Tensile strength, min. psi	D638	3,500
Modulus of elasticity in tension, min. psi	D638	160,000
Rockwell hardness ("R" scale), min.	D785	80
Heat deflection, temperature under load, min. (264 psi, fiber stress)	D648	180°F
Impact strength (izod), min. ft. lb. per inch of notch	D256,Method A	
23° ± 2°C (73.4° ± 3.6°F)		5.5
-40° ± 2°C (-40° ± 3.6°F)		2.0
Specific gravity	D792,Method A	
Min.		1.0
Max.		1.2
Chemical resistance 40 hour immersion in heptane 23° ± 2°C weight change, max. percent	D543	5.0

*These designations refer to the following methods of the American Society of Testing Materials:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

D256 Test for Impact Resistance of Plastics and Electrical Insulating Materials
D543 Test for Resistance of Plastics to Chemical Reagents
D638 Test for Tensile Properties of Plastics
D648 Test for Deflection Temperature of Plastics Under Load
D785 Test for Rockwell Hardness of Plastics and Electrical Insulating Materials
D792 Tests for Specific Gravity and Density of Plastics

3.3.1 Color.- Material for forming case shells shall be olive drab conforming to Color X24087 of FED-STD-595. Color match comparison shall be made on the smooth surface. Unless otherwise specified, material swatch shall be submitted for approval prior to production (see 6.2).

3.3.2 Finish.- Finish for case shells shall be a commercial hair cell grain on the exterior surface and a smooth surface (hair cell optional) on the interior surface.

3.3.3 Fungus resistance.- The material used for forming case shells shall show no evidence of damage, deterioration or profuse growth following an incubation period of 28 days after inoculation of surfaces with a mixed spore suspension.

3.4 Shell forming process.- Case shells shown on Figures 3 and 4 shall be thermo-formed by any proven method normally associated with the plastic industry. Finished formed parts shall be entirely free of blisters, blemishes with no vacuum vent or thermo shock stress marks visible on outside surfaces of formed piece.

3.5 Fabrication.

3.5.1 Extrusion edge assemblies.- The upper extrusion edge (female), Drawing B10539157 and the lower extrusion edge (male), Drawing B10539158 shall be formed in one continuous operation by proven forming techniques and controlled tooling to provide uniformity of alignment, flatness and shall fit freely in each other when case is closed. The formed extrusions shall be free of chatter, tool marks and distortions. The extrusions shall be joined by butt welding or brazing and shall be ground smooth and exhibit soundness of good practices in accordance with MIL-W-8604 or MIL-B-23362 (see Figure 5).

3.5.1.1 Finish.- Prior to assembly to case shells, the extrusion edge assemblies shall be treated by finish 7.3, followed by finish 21.3 of MIL-STD-171, Color X24087 of FED-STD-595.

3.5.1.2 Bonding of extrusions.- The extrusion edge assemblies shall be attached to the case shells with an air curable two part epoxy adhesive conforming to MMM-A-132, Type I, Class 3, applied in a manner to provide structural integrity and a pressure and watertight joint. Accelerated cure by heating shall not exceed 145 ± 5°F, for a period of 5 hours. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

extrusion edge assemblies shall be tool rolled and crimped around the periphery to assure positive attachment to case shells.

3.5.2 Clamp assemblies.- Four (4) clamp assemblies conforming to Part Number 10539217-2 shall be attached to lower extrusion edge as shown on Figure 1. Attachment shall be accomplished as shown on Figure 2. Touch up shall be accomplished with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.5.3 Handles.- One (1) handle, conforming to Part Number 10527450-2 shall be attached to lower extrusion edge, as shown on Figure 1. Attachment shall be accomplished as shown on Figure 2. Touch up shall be accomplished with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.5.4 Gasket.- Gasket shall be fabricated from neoprene rubber conforming to MIL-R-3065, Class SC, Grade 412 ANFFK, .265 O.D. by .156 I.D. The gasket shall be formed by molding, vulcanizing or by butt bonding. Butt bonding shall be accomplished with adhesive conforming to MIL-A-5092, Type II. Prior to inserting the gasket in the female extrusion edge, adhesive conforming to MIL-A-5092, Type II shall be uniformly applied within the well. There shall be no evidence of excess adhesive in the gasket well. The gasket shall be surface treated with a soft film silicone compound conforming to MIL-C-21567.

3.5.5 Hinges.- Two (2) hinges conforming to Part Number 10540474-2 shall be attached to extrusions as shown on Figure 1. Attachment shall be accomplished as shown on Figure 2. Touch up shall be accomplished with paint conforming to TT-E-529, Color X24087 of FED-STD-595.

3.5.6 Bumpers.- Four (4) bumpers, Drawing B8627549 shall be secured to the bottom of the case and four (4) bumpers, Drawing B10511982 shall be secured to the rear of the case as shown on Figure 1.

3.5.7 Relief valve.- A two way automatic pressure relief valve conforming to Drawing A10539222 shall be installed on the cover as shown on Figure 1.

3.5.7.1 Valve instruction plate.- Valve instruction plate conforming to Drawing A10547130 shall be installed adjacent to relief valve as shown on Figure 1.

3.6 Interior arrangement.- The interior arrangement consists of one (1) lower cushion insert for the body (see Figure 7) and one (1) cushion hold-down for the cover (see Figure 8). The cushions are bonded in position as shown on Figure 1A.

3.6.1 Lower cushion insert.- The lower cushion insert shall be molded of polyurethane, polyester formulation, conforming to Type II, Class 2 of MIL-P-26514, density 3.5 lbs/cubic foot, as shown on Figures 7 and 7A. Included in the cushion insert are two (2) aluminum frames with four (4) card guides for indexing spare circuit boards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

3.6.1.1 Frame assembly.- The frame assembly shall be fabricated as shown on Figure 9. The aluminum frame shall be uniformly formed of material conforming to 5052-H32 of QQ-A-250/8. The frame shall be joined by welding, which shall be ground smooth and show soundness of good practices conforming to MIL-W-8604. The frame shall be surface treated by finish No. 7.3 of MIL-STD-171.

3.6.1.2 Card guides.- The card guides shall be thermo-formed as shown on Figure 6 of material conforming to MIL-M-22544, Type III, Color Gray.

3.6.1.3 Bonding.- The aluminum frames and card guides shall be bonded within cavities of cushion insert as shown on Figure 7. Bonding shall be with adhesive conforming to MIL-A-5092, Type II.

3.6.2 Cushion hold-down.- The cushion hold-down shall be fabricated of polyurethane foam, polyester formulation, conforming to Type I, Class 2 of MIL-P-26514, density 1.8 lbs/cubic foot, as shown on Figure 8.

3.7 Marking.- Marking legend shown on Figure 1 shall be upper case, vertical gothic without serifs and shall be applied by silk screen or stencil, Finish No. 21.1 of MIL-STD-171, Color Black 27038 of FED-STD-595.

3.8 Performance.

3.8.1 External components.- External components and assemblies such as latches, handles and hinges shall be correctly positioned, firmly secured and function without interference.

3.8.2 Cover.- The cover assembly shall align properly with case body assembly and shall open and close without interference.

3.9 Environmental.

3.9.1 Impact resistance (ambient temperature).- The case assembly shall show no evidence of cracking, chipping, delamination when dropped from a height of 30 inches. The case assembly shall then be tested for being pressure and watertight.

3.9.2 Impact resistance (low temperature).- The case assembly shall show no evidence of cracking or fracture when subjected to low temperature conditioning at -40°F followed by drop test from a height of 24 inches. The case shall then be tested for being pressure and watertight after the case is conditioned at ambient temperatures.

3.9.3 Rough handling.- The case assembly shall provide positive support and indexing of circuit boards when subjected to a drop from a height of 14 inches on to the side of the case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

3.9.4 Operating temperature.- Cases shall meet functional requirements of 3.8 while exposed and thermally stabilized at ambient temperatures of plus 150 degrees and minus 65 degrees Fahrenheit.

3.9.5 Pressure tight.- The case shall be capable of maintaining a positive pressure of 1 psi without loss of pressure for a period of 15 minutes.

3.9.6 Watertight.- The case shall be capable of maintaining a watertight closure when submerged under a head of 3 feet of water for a period of two (2) hours.

3.10 Workmanship.- Cases fabricated to the requirements of this specification, shall be in accordance with proven forming techniques and shall be free of defects that might affect strength, serviceability and protection of contents.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 General provisions.- The component and subassembly inspection requirements of MIL-F-13926 form a part of the Quality Assurance Provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article testing.- When the contract specifies testing of initial production samples, the following paragraph shall apply:

4.2.1 Initial production test.- Initial production test samples shall be submitted in accordance with contract requirements. Unless otherwise specified in the contract, samples shall be the first two production units and shall have been manufactured using the same materials, processes and procedures as will be used in regular production. Initial production testing shall be in accordance with 4.3, 4.4 and 4.6. Testing shall be conducted by the Government for all examinations and tests.

4.2.2 First article disapproval.- Failure of any one of a first article sample submitted shall be cause for disapproval by the Government and subsequent action as required by the contract clauses applicable to first article testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

4.3 Inspection provisions.

4.3.1 Submission of product.- Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

4.3.2 Examination and tests.- Components and subassemblies shall be inspected in accordance with the inspection provisions contained in MIL-F-13926, and the Supplementary Quality Assurance Provisions (SQAP) listed in the List of Inspection Documents (IEL) when provided with the technical data package (TDP). Examinations and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105, and the sampling plans specified in Table II. Examinations and tests for Packaging, Packing and Marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects shall constitute the minimum inspection to be performed by the supplier prior to Government acceptance or rejection by lot.

TABLE II - CLASSIFICATION OF DEFECTS

CLASS	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURES
CRITICAL:	NONE		
MAJOR:	AQL 1.0% Defective		
101.	Improper forming	3.4	Visual, SME
102.	Edge extrusions improperly formed welded, or brazed	3.5.1	Visual
103.	Extrusion edge assemblies improperly finished	3.5.1.1	Visual
104.	Improper bonding of extrusion edge assemblies, improper epoxy adhesive, extrusion edge not rolled or crimped	3.5.1.2	Visual
105.	Improper clamps or assembly to case	3.5.2	Visual
106.	Improper handle or assembly to case	3.5.3	Visual
107.	Improper gasket or improperly bonded to extrusion edge assembly	3.5.4	Visual
108.	Improper hinge or assembly to case	3.5.5	Visual
109.	Improper bumper or assembly to case	3.5.6	Visual
110.	Improper relief valve, valve installed improperly	3.5.7	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

TABLE II - CLASSIFICATION OF DEFECTS (Continued)

		REQUIREMENT	TEST PROCEDURES
111.	Incorrect instruction plate	3.5.7.1	Visual
112.	Cushion inserts improperly fabricated	3.6.1 and 3.6.2	Visual, SME
113.	Cushion inserts improperly bonded within case	Figure 1A	Visual, Tactile
114.	Marking incorrectly applied or missing	3.7	Visual
MINOR:	AQL 4.0% Defective		
201.	Color match	3.3.1	Visual
202.	Improper finish	3.3.2	Visual
203.	Excess adhesive on gasket	3.5.4	Visual

4.3.3 Acceptance and rejection.- Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

4.3.4 Certification.- Certification shall include test data and results for all characteristics specified below. Certification will be required prior to performing final acceptance inspection and shall suffice for the remainder of the production quantities, provided the manufacturing processes and techniques used to produce the items for which certification was issued have not been changed or revised. Any and all changes will require a new certification from the contractor.

NO.	CHARACTERISTIC	TEST DATA TO COMPLY WITH
301.	Material	3.3

4.4 Special sampling.

4.4.1 General.- One case assembly shall be selected at random as a special sampling from each 100 produced, or from each month's production, whichever occurs first. The sample shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests:

TEST		REQUIREMENT	TEST PROCEDURE
401.	Fabrication	3.3 - 3.7	Container assembly - SME, Visual, Figures 1, 1A, 2, 3, 4, 5, 6, 7, 7A, 8 and 9
402.	Workmanship	3.10	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

4.4.2 Environmental and functional.- Two case assemblies shall be selected at random as samples from each 100 produced, or from each month's production whichever occurs first. The samples shall have successfully met all other acceptance tests specified herein, and shall then meet the following requirements and tests:

CONTROL TEST	REQUIREMENT	TEST PROCEDURE
401. Impact resistance (ambient)	3.9.1	4.6.2
402. Rough handling	3.9.3	4.6.4
403. Pressure tight	3.9.5	4.6.6
404. Watertight	3.9.6	4.6.7
405. Performance	3.8.1, 3.8.2	4.7

4.4.3 Failure of sample.- Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product will be suspended by the Government until necessary corrections have been made by the contractor and the resubmitted samples have been approved (see 4.3.3).

4.5 Inspection equipment.- Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment.- Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements specified in MIL-I-45607.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design.- Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specification or SQAP forming a part of the contract shall be supplied by the contractor in accordance with technical data listed in the List of Inspection Documents (IEL), when provided with the Technical Data Package (TDP).

4.5.2.2 Contractor design.- The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10% of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions and tolerances used in the design of test equipment shall be so selected and controlled as to insure that the test equipment will reliably indicate acceptability of a product which does not exceed 90% of the prescribed tolerance limit, and permit positive rejection when non-conforming. Construction shall be such as to facilitate routine calibration of test equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

4.6 Test methods and procedures.

4.6.1 Preparation for tests.- The relief valve shall be removed during all environmental testing of sample cases.

4.6.2 Impact resistance (ambient temperature).- The sample case assembly shall be fitted with two dummy loads, each having a mass of 15-1/2 by 7-3/4 x 4 and a weight of 15 pounds. The case assembly, shall be subjected to a 30 inch free fall flat drop, once on the top and once on the bottom onto a steel or concrete surface. Following the tests, the case shall be subjected to a pressure and watertight test specified in 4.6.6 and 4.6.7.

4.6.2.1 Results of test.- The case assembly shall be examined and there shall be no evidence of chipping, cracking or delamination.

4.6.3 Impact resistance (low temperature).- The first article sample case fitted with dummy loads specified in 4.6.2 shall be placed in a chamber and the case and contents shall be stabilized at -40°F for a period of 4 hours. The case shall be immediately subjected to a 24 inch free fall flat drop, once on the top and once on the bottom onto a steel or concrete surface. Following the drop test, the case shall be allowed to return to an ambient temperature condition after which pressure and watertight tests specified in 4.6.6 and 4.6.7 shall be performed.

4.6.3.1 Results of test.- The case assembly shall be examined and there shall be no evidence of chipping, cracking or delamination.

4.6.4 Rough handling.- The sample case assembly shall be fitted with maximum number of circuit boards, (spare circuit boards shall be furnished by the Government) and dropped from a height of 14 inches onto the side of the case.

4.6.4.1 Results of test.- All circuit boards shall remain properly indexed within slots provided in cushion insert.

4.6.5 Operating temperature.- The operating temperature test consists of exposing the case to the temperatures indicated in 3.9.4 by means of equipment complying with the requirements of 4.5.2.2. The test shall be conducted in accordance with Procedure II of Specification MIL-F-13926, and the temperature conditions of 3.9.4 shall apply. While exposed to these temperatures, the case shall meet the requirements specified in 3.8.1 and 3.8.2. The operability test shall be conducted on the first article sample only.

4.6.6 Pressure test.- Sample case shall have the relief valve removed and replaced by an appropriate plug. A suitable connection shall be made for the introduction of air pressure. A gage shall be connected to indicate pressure within the case. Air pressure shall be applied up to 1 pound per square inch and the intake valve closed to retain pressure. A soap solution

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

shall be applied to all joints, seams and welds. There shall be no evidence of leakage. After 15 minutes the gage shall be observed to make sure that the original pressure has been maintained.

4.6.7 Watertight.- All case assemblies shall be tested as follows:

The case assembly with relief valve removed, and aperture sealed with gasketed fitting, shall be submerged in a vessel, under a head of 3 feet of water in accordance with MIL-STD-108, Table III, Method b. The case assembly shall be submerged for a period of 2 hours. The case shall be thoroughly dried externally prior to removal of cover. There shall be no evidence of water penetration.

4.6.8 Fungus resistance.- Tests shall conform to fungus resistance test, Procedure I of MIL-E-5272. Sample material shall be minimum of one square foot. At the completion of the test period, any signs of damage, deterioration or profuse growth shall constitute cause for rejection. The fungus test shall not be required for suppliers having qualified by certification that their material has been tested by above procedure and is fungus resistant.

4.7 Performance.

4.7.1 External components.- Operability of these devices shall be checked by a functional and visual examination when engaged and disengaged a minimum of 5 times to determine compliance with the requirements specified in 3.8.1.

4.7.2 Cover assembly.- The cover shall be operable as specified in 3.8.2 when subjected to a functional examination by opening and closing the case at least five times and subsequently visually examining the components for defects or poor workmanship.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing.- Unless otherwise specified the cases shall be prepared for shipment using normal commercial methods, or materials to assure acceptance by common or other carrier for safe transportation at the lowest rate to point of destination.

5.2 Marking.- Marking for shipment shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The carrying case defined herein is intended to accommodate a maximum of forty-eight spare flip flop circuit boards or boards of similar configuration. Provisions are also provided for, but not limited to the following: (see Figure 1A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

1 - Tape Reader - 10526192
10 - Lamp Glow NE2J - 10526346
3 - Relay - 10526121-1 or 3 Relay - 10526121-2
5 - Tube Indicator Assy - 10526253 or 5 - Tube Indicator Assy - 10526259

The carrying case is water and pressure tight and is suitable for handling by air.

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Applicable stock number.
c. Requirement for submission of material swatch (3.3.1).

Custodian:

Army - MU

Preparing acitivity:

Army - MU

Project No. 1220-A240Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.


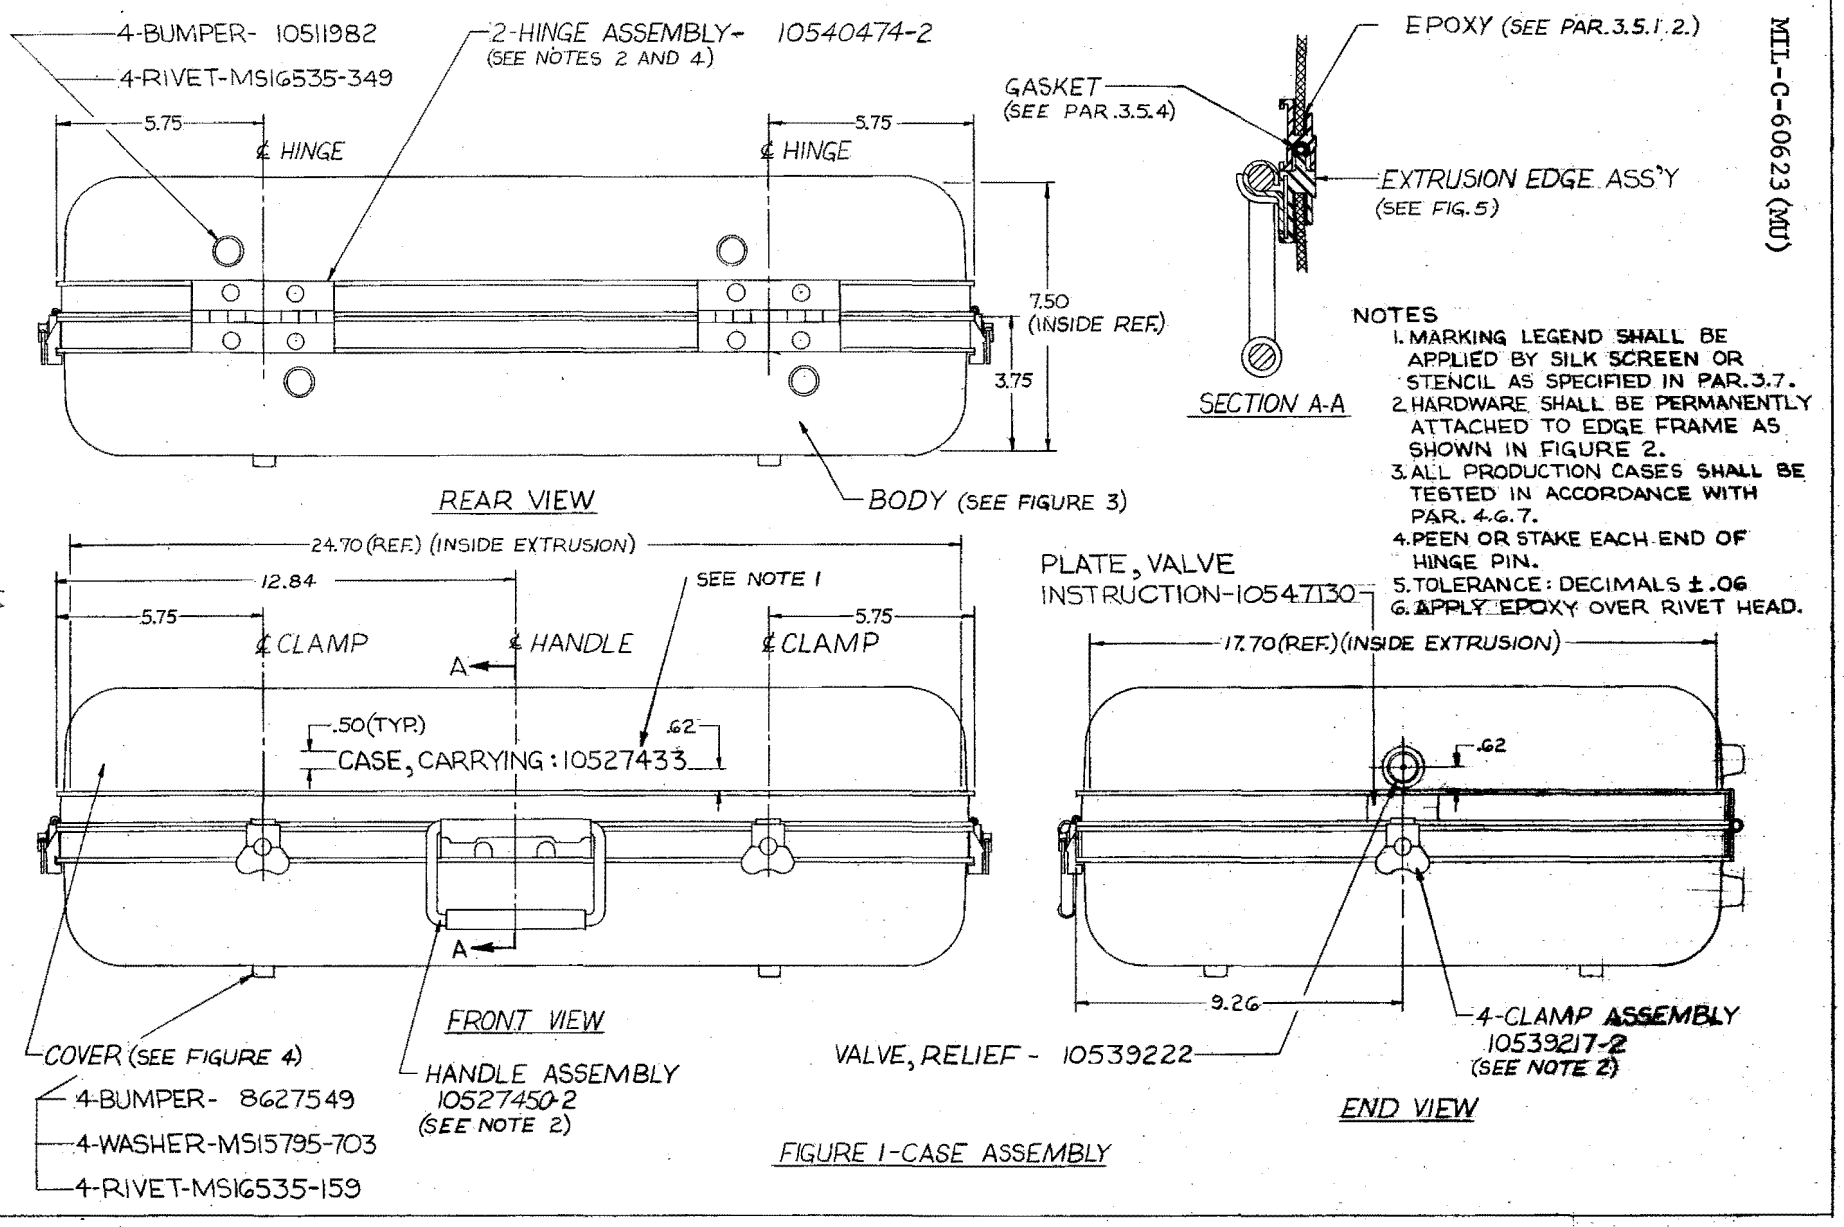


FIGURE 1-CASE ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

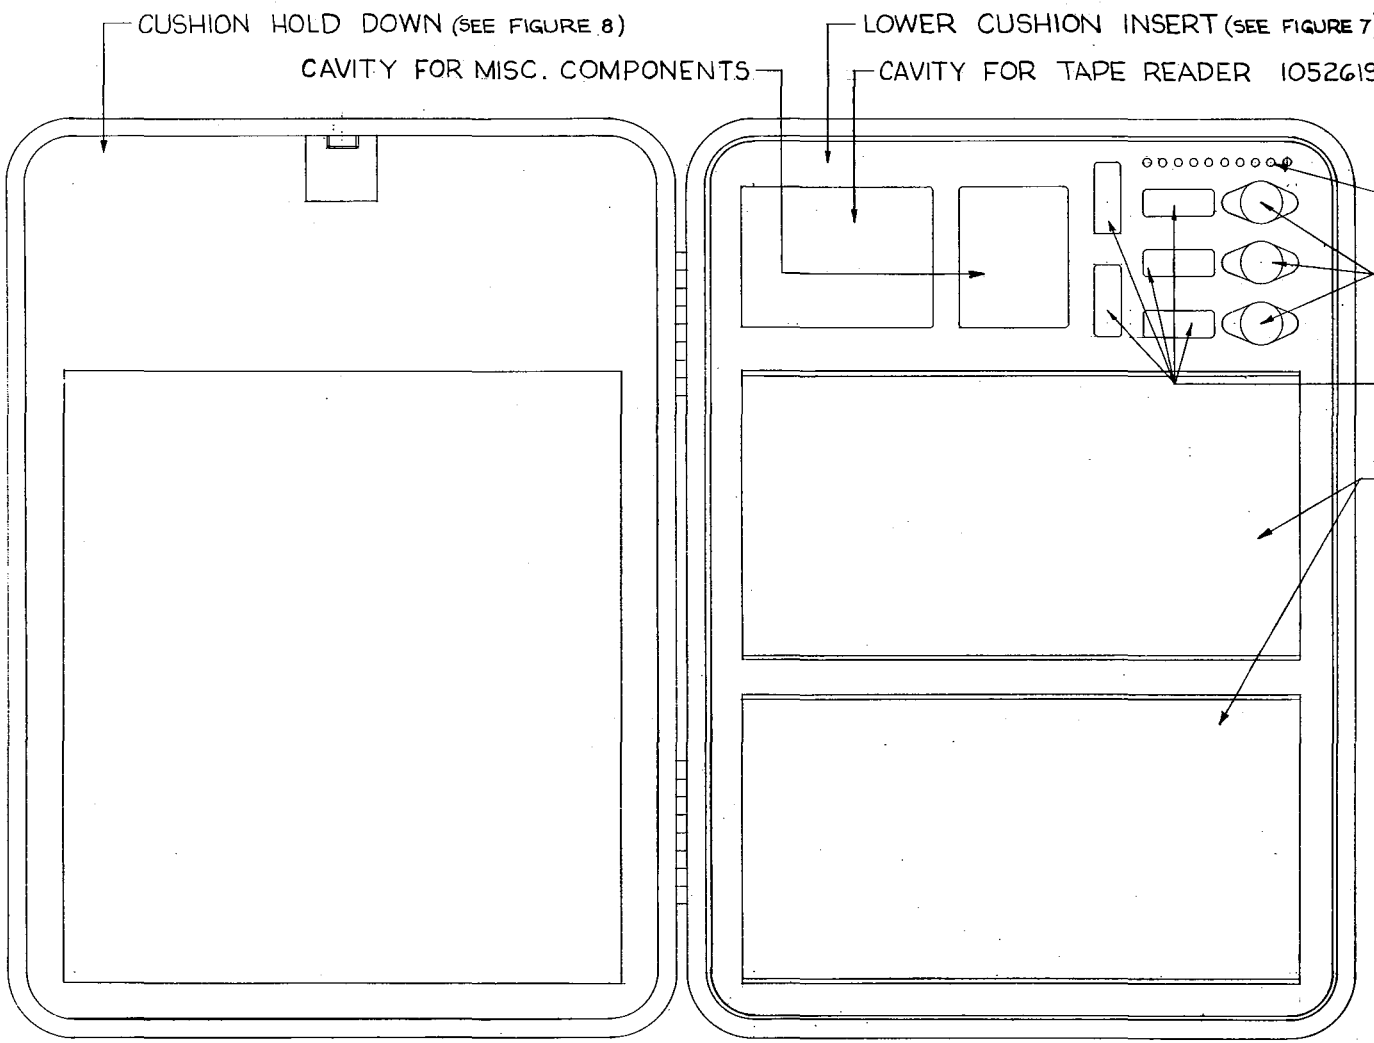


NOTE
1. CUSHION INSERTS SHALL BE BONDED, IN POSITION AS SHOWN, WITH ADHESIVE CONFORMING TO MIL-A-5092, TYPE II.

FIGURE 1A-INTERIOR CUSHION ARRANGEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

INSTALLATION PROCEDURE:

1. LOCATE CLAMP, CLASP, HANDLE, & HINGE ASSEMBLIES, AS REQUIRED, IN POSITION AS SHOWN IN FIGURE 1.
2. POSITION HARDWARE BASE PLATE IN EXTRUSION FLANGE.
3. ENGAGE INSTALLATION TOOL IN SLOT "B", AS SHOWN.
4. FIRMLY PRESS TOOL DOWNWARD & TURN TOOL 90° TO THE RIGHT & 90° TO THE LEFT, TO DEFORM SLOT OF BASE PLATE IN EXTRUSION FLANGE AS SHOWN.

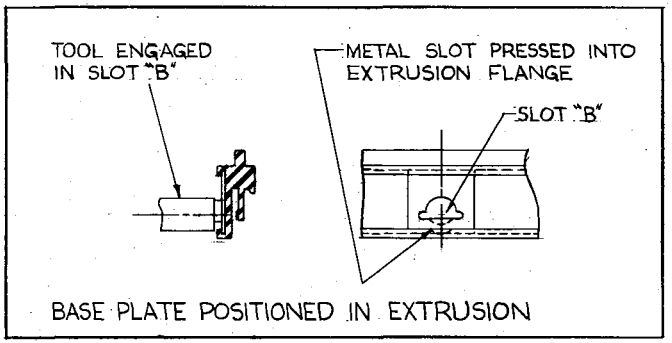


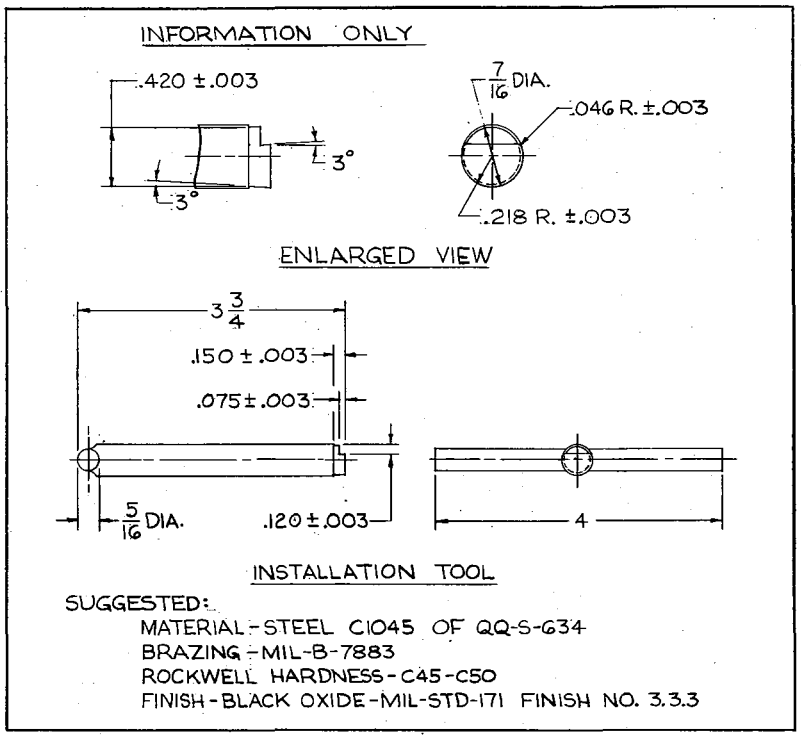


FIGURE 2 - INSTALLATION OF HARDWARE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

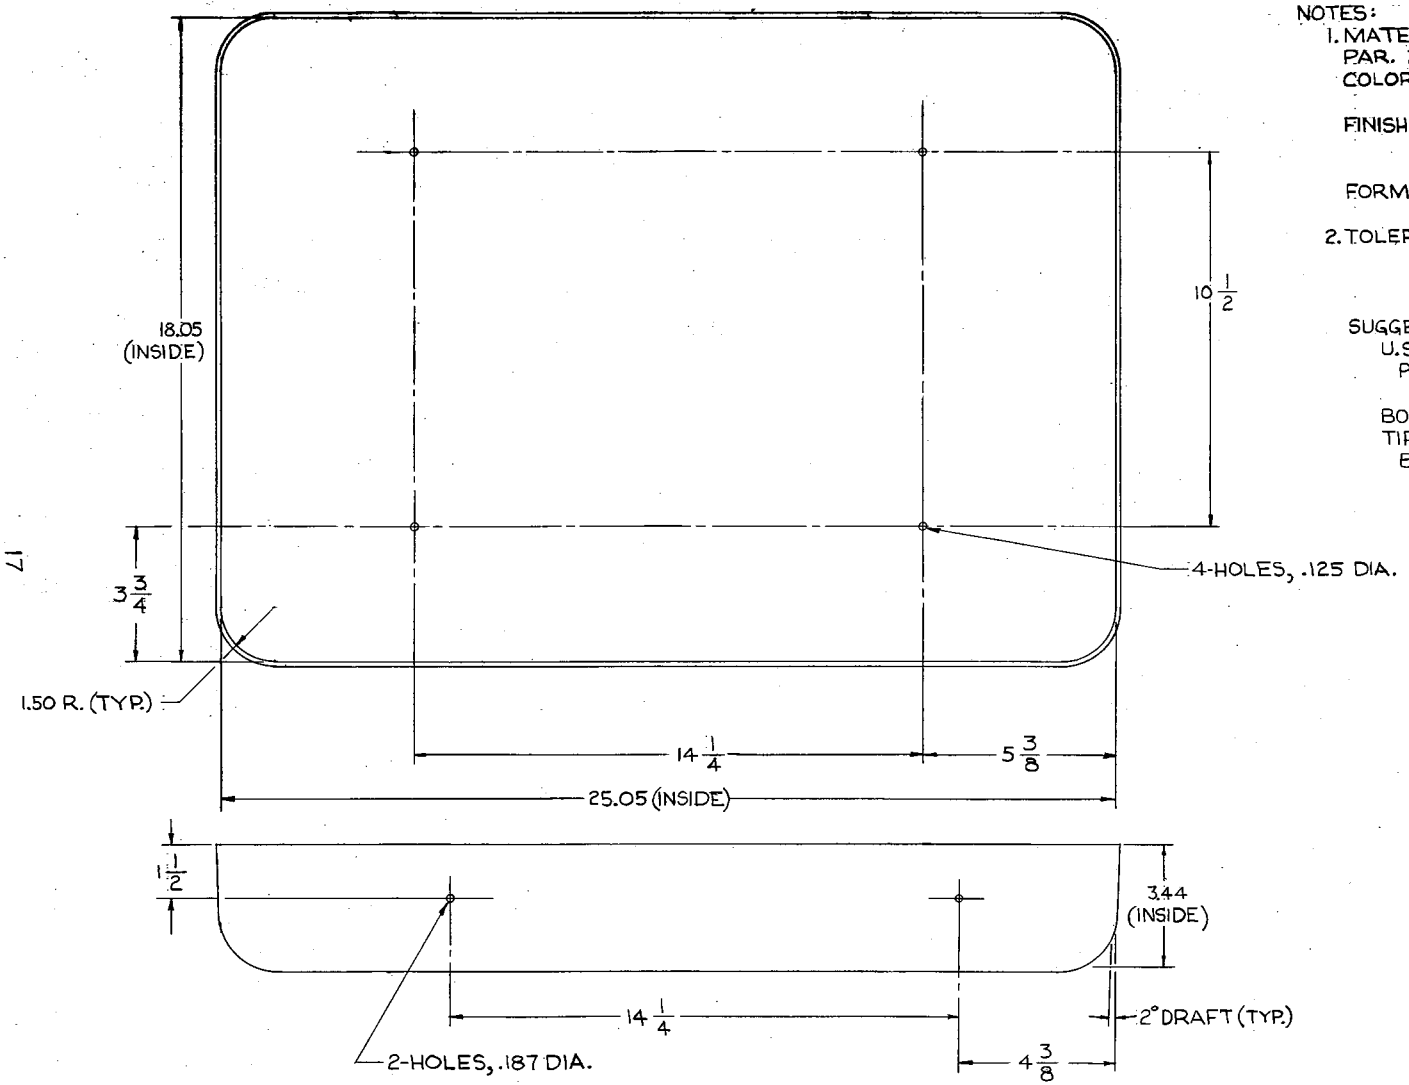

NOTES:

1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.3. STARTING THICKNESS-.187
   COLOR-OLIVE DRAB, NO. X24087 OF FED-STD-595
   FINISH- EXTERIOR-HAIRCELL GRAIN
   INTERIOR (OPTIONAL)-HAIRCELL GRAIN OR SMOOTH
   FORMED WALL THICKNESS-.120 $^{+.020}_{-.030}$

2. TOLERANCES- DECIMALS ± .03
   FRACTIONS ± 1/32
   ANGLES +1°, -0°

SUGGESTED MATERIAL SOURCES:
U.S. RUBBER CO., CHICAGO, ILLINOIS
PART NO. R40-4313-CPA-1492
OR
BOLTA PRODUCTS DIV. OF GENERAL TIRE & RUBBER CO., LAWRENCE, MASS.
BOLTATRON SERIES-6000-X4451

FIGURE 3 - SHELL, BODY

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

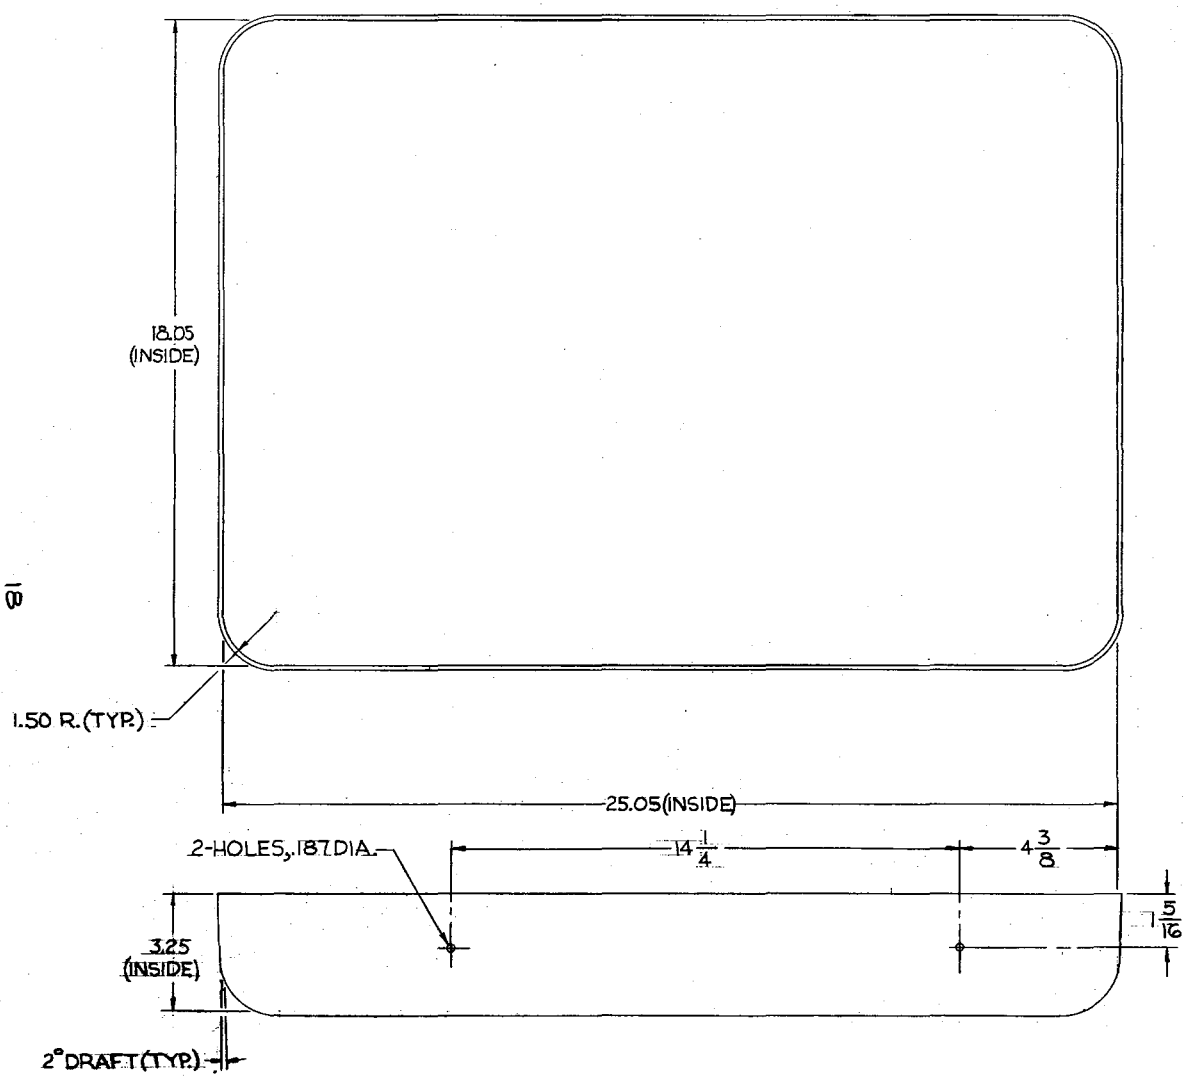


FIGURE 4 - SHELL, COVER

NOTES:


1. MATERIAL SHALL BE AS SPECIFIED IN PAR. 3.3. STARTING THICKNESS - .187
   COLOR - OLIVE DRAB, NO. X24087 OF FED-STD-595
   FINISH - EXTERIOR - HAIRCELL GRAIN
   INTERIOR (OPTIONAL) - HAIRCELL GRAIN OR SMOOTH
   FORMED WALL THICKNESS .120 $^{+.020}_{-.030}$


2. TOLERANCES - DECIMALS ±.03 ·
   FRACTIONS ±1/32
   ANGLES +1°, -0°

SUGGESTED MATERIALS SOURCE
U.S. RUBBER CO., CHICAGO, ILLINOIS
PART NO. R40-4313-CPA-1492
OR
BOLTA PRODUCTS DIV. OF GENERAL TIRE & RUBBER CO., LAWRENCE, MASS.
BOLTATRON SERIES - 6000 - X4451

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

NOTES:
1. COMPLETED ASSEMBLIES SHALL FIT FREELY INTO EACH OTHER AS SHOWN IN SECTION "A-A"
2. MUST MATCH SHELLS SHOWN ON FIGURES 3 AND 4
3. EDGE FRAMES SHALL BE FORMED, WELDED AND FINISHED IN ACCORDANCE WITH PAR. 3.5.1 AND 3.5.1.1

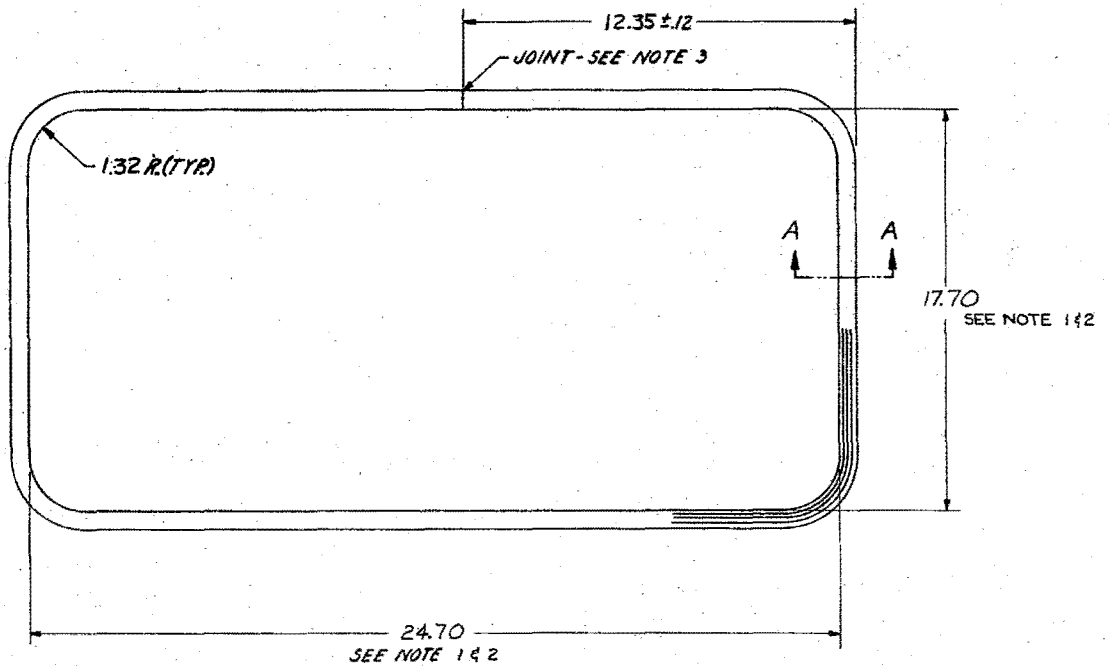

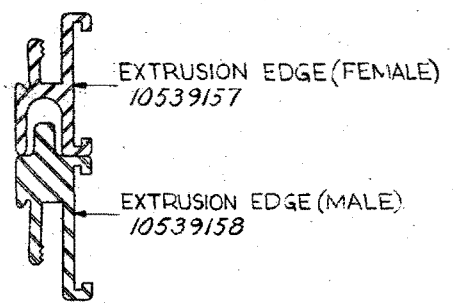


SECTION A-A

FIGURE 5 - EXTRUSION EDGE ASSEMBLIES

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

NOTES
1. BREAK SHARP EDGES.
2. MATERIAL SHALL CONFORM TO MIL-M-22544, TYPE III COLOR-GRAY, STARTING THICKNESS .062
3. TOLERANCES ±1/32
4. FINISH-SMOOTH ALL OVER.

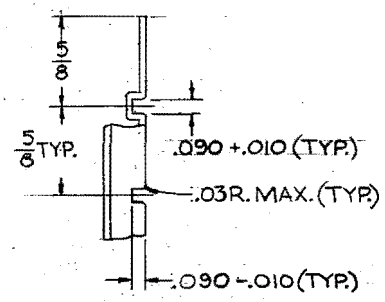

PARTIAL TOP VIEW


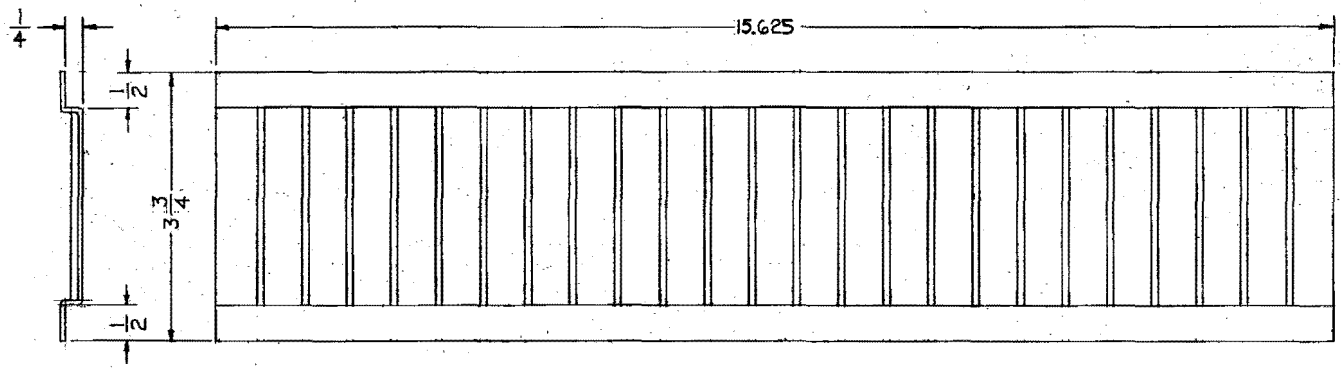


FIGURE 6 - CARD GUIDE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

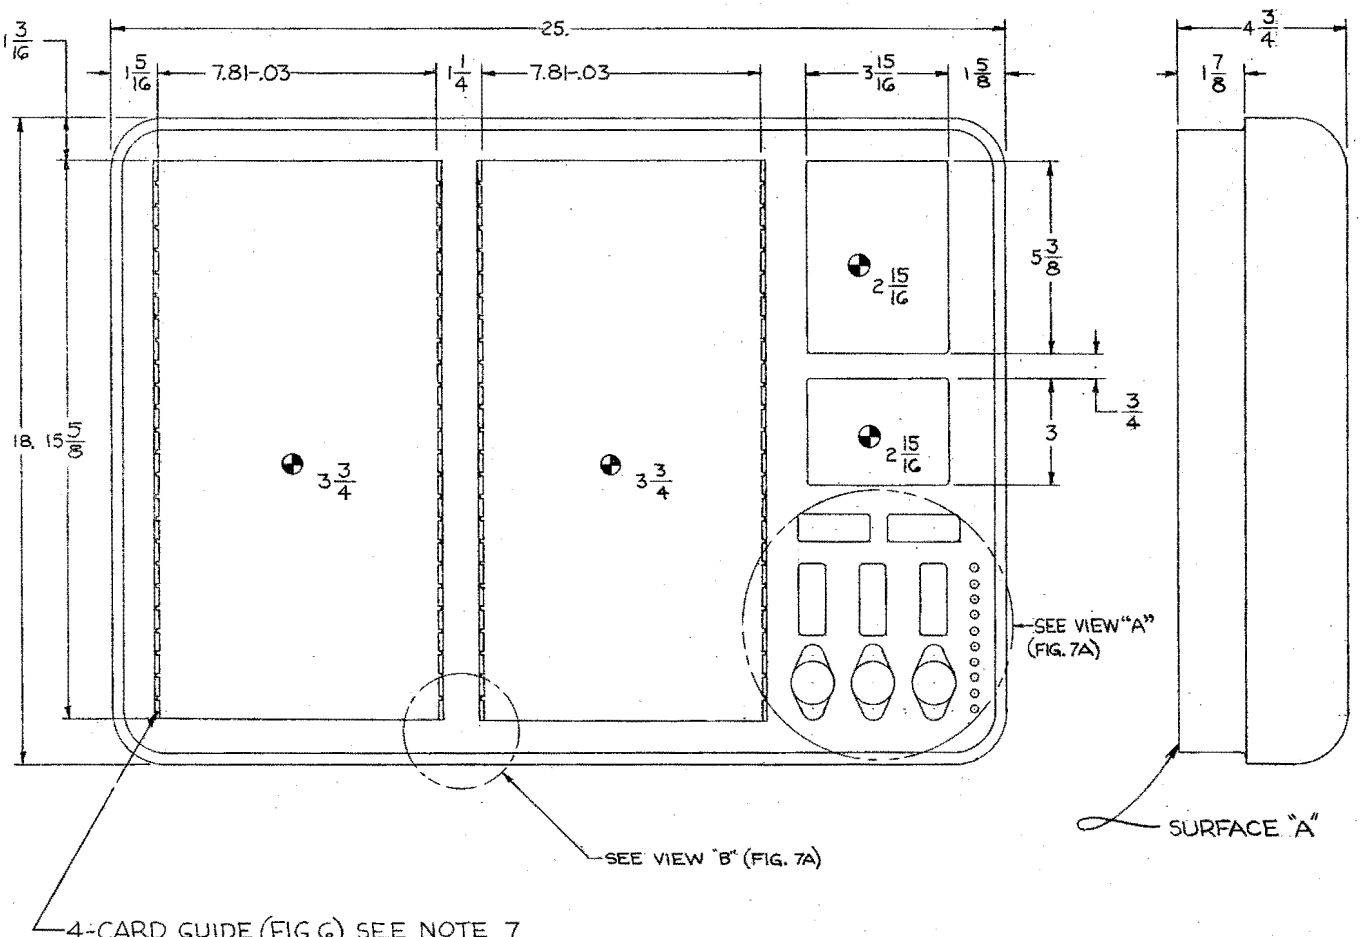

NOTES

1. ALL RADII TO BE 1/16 R. EXCEPT AS SPECIFIED.
2. CUSHION INSERT SHALL BE MOLDED OF POLYURETHANE, POLYESTER FORMULATION CONFORMING TO TYPE II, CLASS 2 OF MIL-P-26514.
3. COLOR SHALL BE CHARCOAL BLACK OR GRAY.
4. DIMENSIONS MARKED ◒ ARE DEPTH FROM SURFACE "A".
5. TOLERANCES ±1/16
6. DENSITY - 3.5 LBS./CU. FT.
7. BOND TO CUSHION WITH ADHESIVE CONFORMING TO MIL-A-5092, TYPE II.

FIGURE 7- LOWER CUSHION INSERT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.


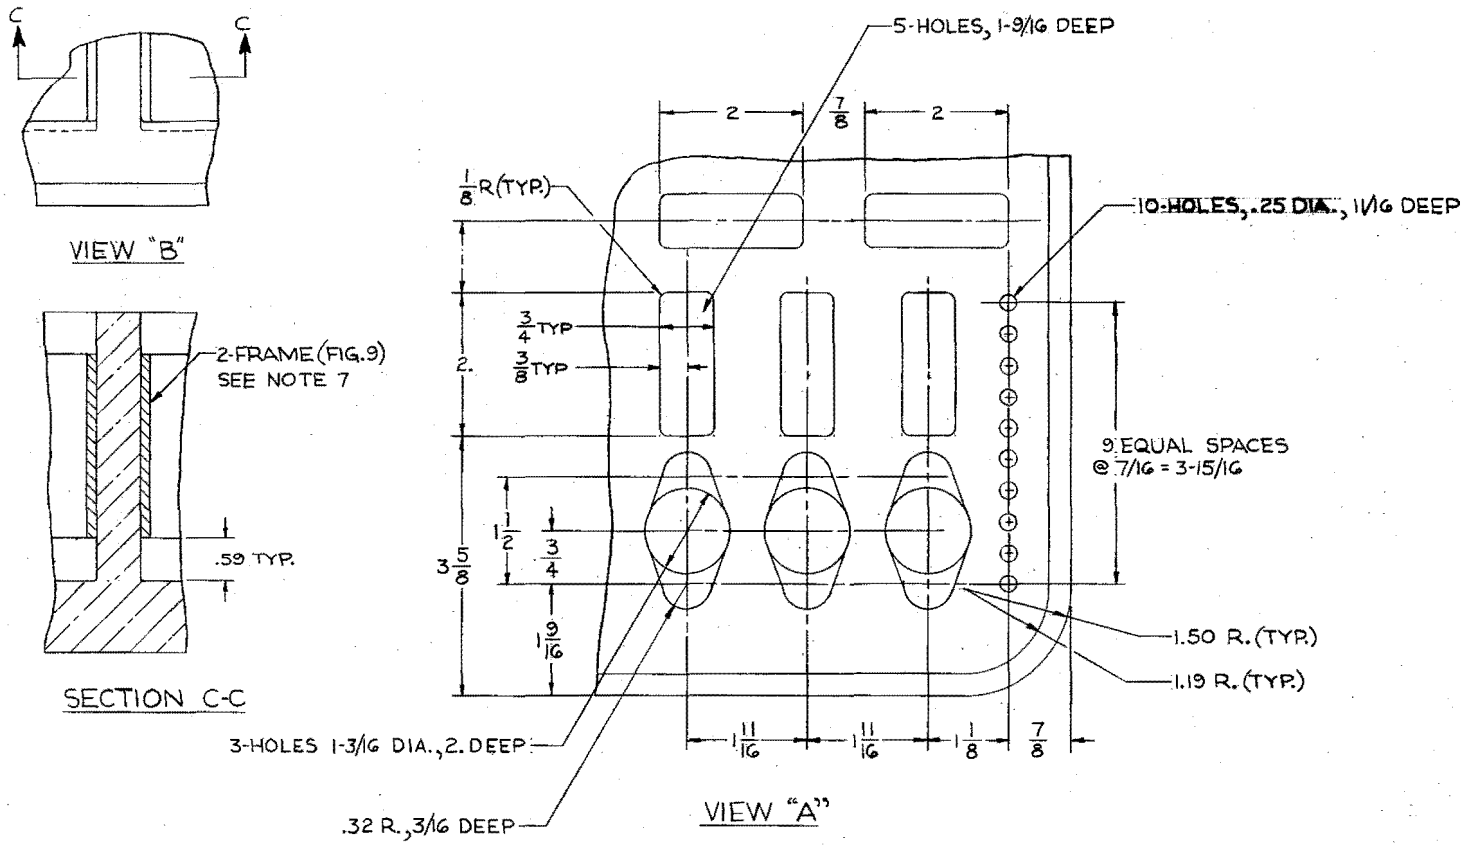


FIGURE 7A-LOWER CUSHION INSERT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

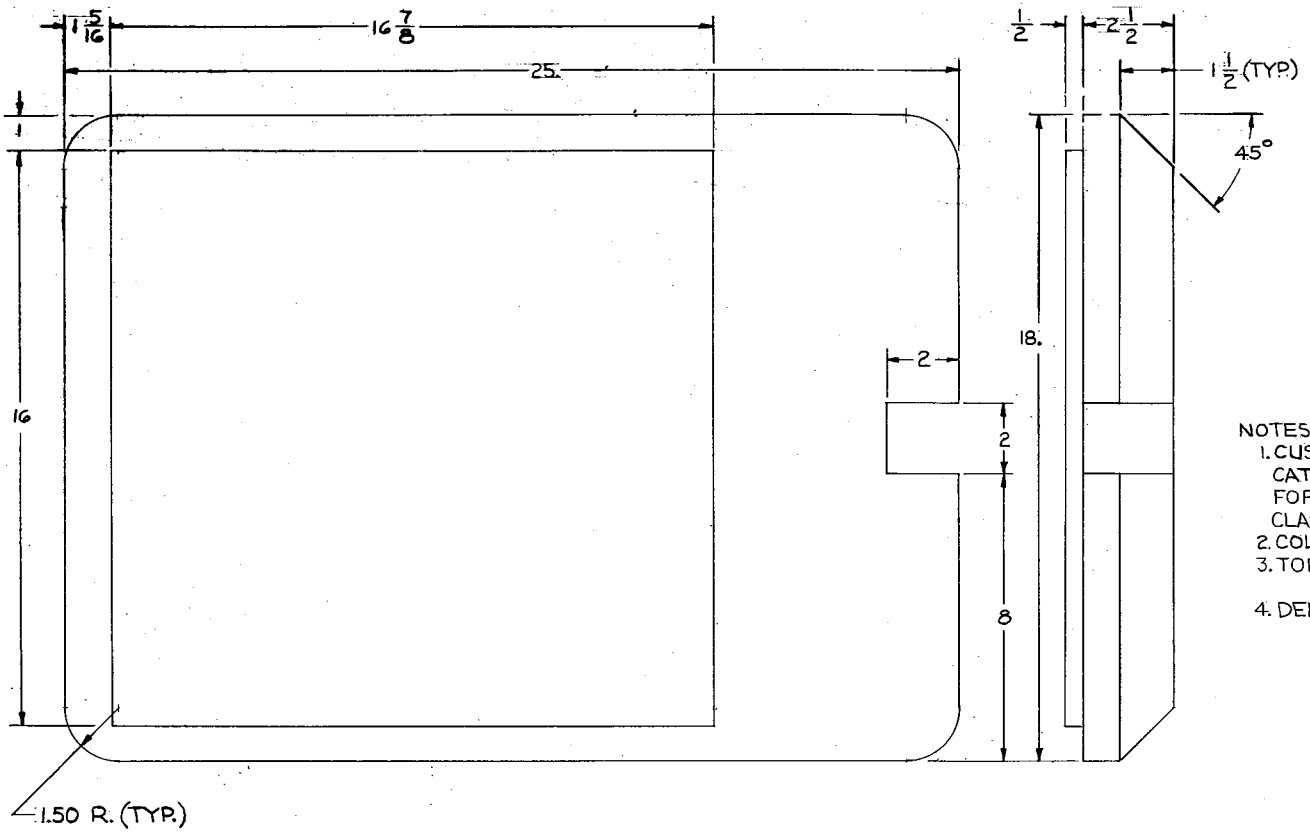

NOTES:
1. CUSHION HOLD DOWN SHALL BE FABRICATED OF POLYURETHANE, POLYESTER FORMULATION CONFORMING TO TYPE I, CLASS 2 OF MIL-P-26514.
2. COLOR-CHARCOAL BLACK OR GRAY.
3. TOLERANCES - FRACTIONS ±1/16
   ANGLES ±3°
4. DENSITY - 1.8 LBS./CU. FT.

FIGURE 8 - CUSHION HOLD DOWN

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.

NOTES:
1. MAT'L-.125 THICK ALUM. ALLOY 5052-H32 PER QQ-A-250/8
2. FRAME SHALL BE FORMED, WELDED & FINISHED IN ACCORDANCE WITH PAR. 3.6.1.1
3. TOLERANCE ±.03
4. THIS DIM. SHALL BE MAINTAINED WHEN ASSEMBLED IN CUSHION INSERT (FIG. 7)

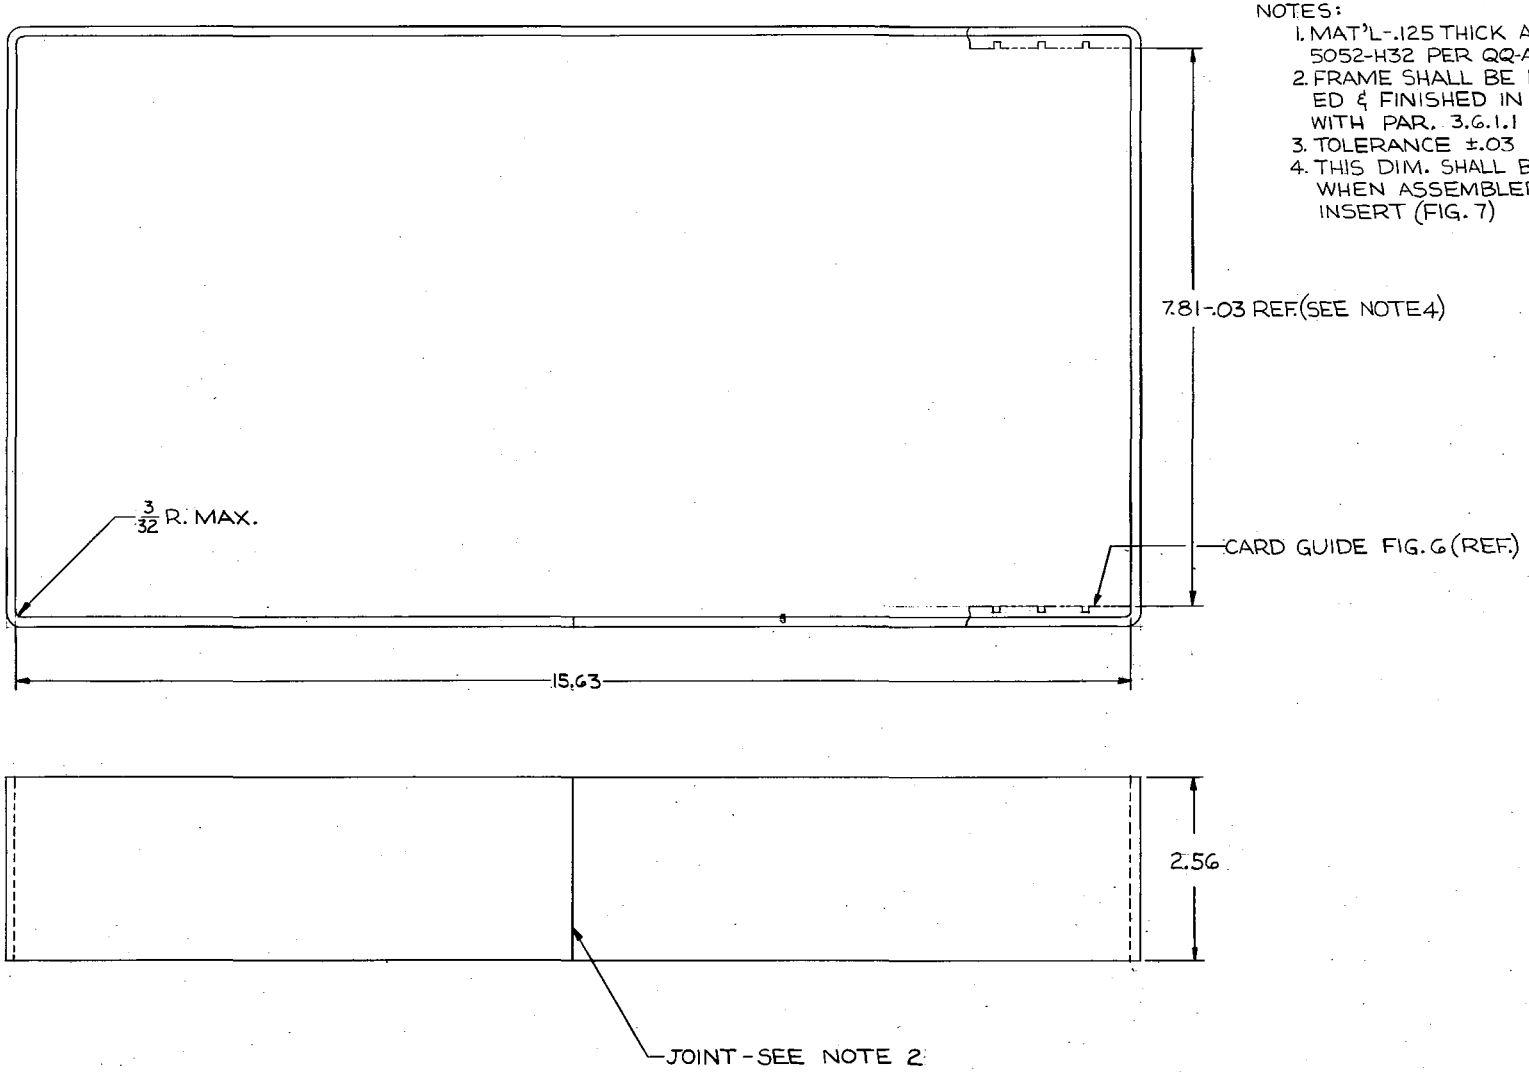


FIGURE 9 - FRAME ASS'Y

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:50Z
Check the source to verify that this is the current version before use.