MILITARY SPECIFICATION

MOUNTING KIT

ROLLER, MINE CLEARING: TRACK-WIDTH, TANK-MOUNTED

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defenses

1. SCOPE

1.1 Scope. This specification defines a mounting kit used in attaching the mine clearing roller assembly kit to the M60 series tank.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-601	- Boxes, Wood, Cleated-Plywood.

MILITARY

MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-T-704	Treatment and Painting of Materiel.
MIL-C-16173	- Corrosion Preventive Compound, Solvent Cutback, Cold-Application.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1095

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of U.S. Military Property.

2.1.2 Other Government documents, drawings, and publications. The following other government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

ME

TA13222E0026	- Mounting Kit, Mine Roller System.

(Copies of specification, standards and drawings required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplements thereto, if applicable.

AMERICAN WELDING SOCIETY (AWS)

D1.1 - Structural Welding Code, Section 5, Qualification

(Application for copies should be addressed to the American Welding Society, 2501 Northwest Seventh Street, Miami, FL 33125.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

(Application for copies should be addressed to the American Society of Mechanical Engineeers, 345 East 47th Street, New York, NY 10017.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. Requirements for the mounting kit shall be in accordance with TA13222E0026 and as specified herein.

3.2 Drawings. The drawings forming a part of this specification are end product drawings. No deviations from the prescribed dimensions or tolerances are permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the kit. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.3 First article (first produced kit). The contractor shall furnish one or more kits as specified (see 6.2), for examination within the time-frame specified (see 6.2), to prove that his production methods will produce kits that comply with the requirements of this specification. Examination shall be specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.4 Materials. Materials shall be as specified on the applicable drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.4).

3.5 Safety. Nonfunctional sharp edges, projecting points, and excessive length of fastening devices shall be avoided.

3.6 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable. Interchangeable parts are defined as two or more like parts possessing such functional and physical characteristics as to be equivalent in performance and durability and capable of being exchanged one for the other without alteration of the parts themselves, or of adjoining parts, and without selection for fit or performance.

3.7 Treatment and Painting.

3.7.1 External. The portions of the kit, externally located on the tank, normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, Type A color forest green.

3.7.2 Internal. The portions of the kit, internally located on the tank, normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, Type A, color white enamel.

3.7.3 Dissimilar Metals. Nonpermissible galvanic couples (dissimilar metals), as defined in MIL-T-704, shall be insulated as specified.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

3.8 Identification marking. The kit shall be identified in accordance with MIL-STD-130.

3.9 Workmanship. Each mounting kit component shall be clean and free from sand, dirt, fins, pits, scale, corrosion, burrs, sharp edges, cracks, poor or welds not meeting drawing requirements, or any other defects that could impair the mounting of the kit.

3.9.1 Metal fabrication. Metal used in fabrication shall be free of kinks and sharp bends. The straightening of material shall be done by methods that will not damage the material. Corners shall be square and true. All bends shall be made with controlled means to ensure uniformity of size and shape. Precaution shall be taken to avoid overheating. Heated aluminum shall be allowed to cool by natural convection. External surfaces shall be free from burrs, sharp edges, and corners, except when sharp edges or corners are required or where they are not detrimental to safety.

3.9.2 Welding. The surfaces of parts to be welded shall be free from rust, corrosion, scale, paint, and grease, and from mill scale that can be removed by chipping and wire brushing, as well as from other foreign matter. Welds shall withstand stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading, Parts to be joined by fillet welds shall be brought into as close contact as possible, and in no event shall be separated by more than 3/16 inch unless appropriate bridging techniques are usede. The welding process used in fabrication of the mounting kit shall be as specified in applicable drawings. No deviation from these requirements are permissible without prior Government approval.

3.9.2.1 Welders. Before assigning any welder to manual welding work covered by this specification, the contractor shall provide the contracting officer with certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the type of welding operations to be performed and that such qualification is effective as defined by the particular code:

- AWS D1.1, Structural Welding Code, Section 5, Qualification
- ASME Boiler and Pressure Vessel Code, Section IX, Welding Qualifications

Contractors who make only horizontal welds need not qualify welders for "all position welding." Subject to approval by the Government, the contractor's standard welder qualification may be substituted for the above codes, provided that the contractor's procedure is equivalent to the above codes. The contractor shall be responsible for determining that automatic welding equipment operators are capable of producing quality welds in accordance with AWS or ASME codes.

3.9.2.2 Inspection. Inspect all welds as per drawing. No cracks are permissible. Workmanship specimens that are required by the applicable specifications shall be approved by Quality Assurance representatives of the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified (see 6.2), the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified (see 6.2), the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. Inspection records for examinations performed by the contractor shall be kept complete and available to the Government for a period of four years following completion of the contract. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements

4.1.1 Component and material inspection. The contractor is responsible for ensuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, drawings, and tolerances, as applicable.

4.1.2 Disassembly inspection. Failure of any examination by the initial production mounting kit components shall be cause for disassembly, in the presence of a Government representative, of the initial production mounting kit components to the extent necessary to determine the cause of the failure. Each disassembled part shall be examined in detail for compliance with this specification and referenced drawings in regard to materials, dimensions, tolerances and workmanship. Parts not complying with such requirements, shall be rejected and shall be cause for rejection of the initial production mounting kit components. Reassembly with replacement parts shall be the responsibility of the contractor.

4.1.3 Parts and components. Upon fabrication, parts and components shall be inspected for compliance with the referenced specifications, standards, drawings, and tolerances as shown on the drawings.

4.2 Classification of inspections. The inspection requirements specified herein shall be classified as follows:

a. Initial production inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection comparison (see 4.6).
d. Inspection of packaging (see 4.7).

4.3 Initial production inspection. One or more initial production kits from the first five units being fabricated by production tooling will be examined for compliance with the drawings and characteristics listed in column 3 of table 1 to determine conformance to the requirements of this specification. The inspection will be performed by the contractor at the contractor's location and witnessed by Government inspectors. Acceptance of an initial production kit shall not exclude remaining kits from quality conformance inspections and acceptance provisions specified in 4.4.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

4.3.1 Inspection failure. Failure of an initial production kit to meet any requirement specified herein during the examination specified in 4.3 shall be cause for rejection of the initial production mounting kit and shall be cause for refusal by the Government to continue acceptance of production kits until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on mounting kit components previously accepted and produced under the contract. Any deficiencies found as a result of the initial production inspection will be considered prima facie evidence that all kits accepted prior to the completion of initial production inspection are similarly deficient, unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.4 Quality conformance inspection

4.4.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined for the major and minor defects specified in column three of table I. Acceptable quality level (AQL) shall be 2.5 percent defective for major defects and 4.0 percent for minor defects.

4.5 Inspection schedule.

4.5.1 Examination.

4.5.1.1 Examination conditions. Unless otherwise specified, conformance examination shall be performed by the contractor at the contractor's location, and witnessed by Government inspectors.

4.5.1.2 Examination procedures (initial production). One or more initial production kits, selected at random, shall be examined for conformance to dimensions specified on the drawings.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Table I. Examination Schedule

Initial Production	Quality Conformance	Characteristics	Requirement Paragraph
1	2	3	4
		MAJOR	
x	x	101. Dimensions are not as specified.	3.2
x	x	102. Parts and components are not complete.	3.2
x	x	103. Safety is not as specified	3.5
x	x	104. Workmanship is not as specified.	3.9
x	x	105. Welding certification is not furnished.	3.9.2.1
x	x	106. Parts are not inter-changeable.	3.6
x	x	107. Material is not as specified.	3.4
		MINOR	
x	x	201. Treatment and painting are not as specified.	3.7
x	x	202. Identification marking is not as specified.	3.8

4.6 Inspection comparison. The Government may select kits at any time during the initial production period and subject them to the examinations specified in 4.4.2 to determine conformance to the requirements of this specification. The inspection will be performed by the contractor at the contractor's location and witnessed by Government inspectors on kits selected at random from those which have been accepted by the Government, but will not include the previously inspected initial production kits.

4.6.1 Inspection failures Failure of an inspection comparison kit to meet any requirement specified herein during, and as a result of, the examination shall be cause for rejection of the inspection comparison kit and shall be cause for refusal by the Government to continue acceptance of initial production kits until evidence has been provided by the contractor, at no cost to the Government, that all deficiencies have been corrected. Any deficiencies found as a result of inspection comparison will be considered prima facie evidence that all kits accepted prior to the completion of inspection comparison are similarly deficient; unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

4.7 Inspection of packaging.

4.7.1 Preproduction pack inspection.

4.7.1.1 Examination. The preproduction pack shall be examined for the defects listed in 4.7.2.3. Presence of one or more defects shall be cause for rejection.

4.7.2 Quality conformance inspection of pack.

4.7.2.1 Unit of product. For inspection purposes, a completed pack ready for shipment shall be considered a unit of product.

4.7.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.7.2.3 Examination. Samples selected in accordance with 4.7.2.2 shall be examined for the major defects as shown in table II. The AQL shall be 2.5 percent defective.

TABLE II. Examination Schedule.

Number	Characteristics	Requirement Paragraph
	MAJOR	
108.	Ferrous metal surfaces not preserved as specified.	5.2.1
109.	Items in individual cartons not preserved as specified.	5.2.1
110.	Hydraulic lines not sealed as specified.	5.2.2
111.	Technical publications not preserved as specified.	5.2.3
112.	Unit packaging-of kit components not *as* specified.	5.2.4 and appendix
113.	Level A box not as specified.	5.3.1
114.	Placement of unit packaged components in shipping container not as specified.	5.3.1/5.3.2 and appendix
115.	Blocking of kit and components not as specified.	5.3.1/5.3.2 and appendix
116.	Strapping not as specified for level A.	5.3.1
117.	Level C box not as specified.	5.3.2/5.3.1
118.	Strapping not as specified for level C.	5.3.2/5.3.1
119.	Container identification markings not as specified.	5.4 and appendix

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination within the time frame specified (see 6.2) to prove prior to starting production packaging the applied preservation, packing and marking comply with the packaging requirements of this specification. Examinations shall be those specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3). The preproduction pack may be prepared utilizing either the preproduction model or a production kit. When the preproduction model is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government, to facilitate comparison between the preproduction model and production kit.

5.2 Preservation.

5.2.1 Ferrous metal surfaces. Any unpainted or machined ferrous metal surfaces on any of the kit components shall be coated with preservative conforming to MIL-C-16173, Grade 2, or equivalent. Those items placed in individual cartons shall be wrapped with barrier material conforming to MIL-B-121.

5.2.2 Hydraulic lines. Hydraulic lines, both rigid and flexible types, not connected to another component shall have their ends sealed with plastic caps or plugs to prevent entrance of dirt or water.

5.2.3 Technical publications. Technical publications shall be placed together in a suitably sized polyethylene bag, not less than 4 mils thick. The bag shall be closed by heat sealings

5.2.4 Unit packaging. Individual components of the kit shall be placed in containers as specified in the Appendix.

5.3 Packing. Packing shall be level A or C as specified.

5.3.1 Level A. The complete kit shall be packed in a box conforming to PPP-B-601, overseas type, style A except that gross weight may be increased to a maximum of 1,300 pounds. Placement of unit packaged components and all blocking shall be in accordance with the Packaging Data Sheet, (see Appendix). The box shall be reinforced with flat steel strapping in accordance with the box specification.

5.3.2 Level C. The complete kit shall be packed as specified for Level A, except that the box shall be domestic type, style optional.

5.4 Marking. Marking for shipment and storage shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The mounting kit permits the attachment of the mine clearing roller system on an M60 series tank.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. The basic acquisition document should specify the following:

a. Title, number, and date of this specification.
b. Date of issue of DoDISS applicable to this contract and exceptions thereto (see 2.1.1).
c. Time frame required for submission of initial production model (see 3.3).
d. Data requirements [see 3.9.2.1 and 4.1).
e. Government and contractor inspection responsibilities (see 4.1).
f. Time frame required for submission of preproduction pack (see 5.1).
g. Degree of packing required (see 5.3).

6.3 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval Of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to package the mounting kits in accordance with this specicfication.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.4).

Custodian:
Army - ME

Review activity:
Army - AT

Preparing activity:
Amy - ME

Project 1095-A159

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

APPENDIX

MOUNTING KIT

10. Scope. This appendix contains packaging data sheets which describe the packaging required for-the mounting kit.

20. APPLICABLE DOCUMENTS

20.1 Government documents.

SPECIFICATION

FEDERAL

PPP-B-566	- Box, Folding, Paperboard.
PPP-B-601	- Box, Wood, Cleated-Plywood.
PPP-B-636	- Box, Shipping, Fiberboard.
PPP-T-60	- Tape, Packaging, Waterproof.

MILITARY

MIL-B-121	- Barrier Material, Greaseproofed, Water-proofed, Flexible.
MIL-C-16173	-Corrosion Preventive Compound, Solvent Cutback, Cold Application.

STANDARDS

MILITARY

MIL-STD-129	- Marking for Shipment and Storage.
MS 27183	- Washer, Flat-Round, steel, Cadmium plated, General Purpose.
MS 35207	- Screw, Machine-Pan Head, Cross-Recessed Carbon Steel, Cadmium Plated, Unc-2a (In/mm).
MS 35338	- Washer, Lock-Spring, Helical, Regular (Medium) Series.
MS 90727	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Alloy Steel, Grade 8, Cadmium Plated, Unc-2a (In/mm).
MS 90728	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt) Alloy Steel, Grade 8, Cadmium Plated, Unc-2a (In/mm).

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

PACKAGING DATA SHEET	SHEET 1 OF	SHEETS 11	FSCM	PART NUMBER 13222E0026P	NATIONAL STOCK NUMBER
FEDERAL ITEM NAME: MOUNTING KIT					ORIGINAL DATE
ITEM WEIGHT: 1030 lbs	ITEM CUBE: 14.26 cu ft		ITEM SIZE: 53" x 31" x 15"		REVISION / DATE

LEVEL A UNIT PACK	UNIT PACK QTY / STEP	DRAWING SPECIFICATION	METHOD / SIZE	CLEANING STYLE	TYPE	GRADE	DRYING CLASS	MIL-P-116 UNIT PACK
PRESERVATIVE	1A	MIL-C-16173				2		SIZE: 56" x 33" x 21"
PRESERVATIVE			SIZES ARE SHOWN					
INTIMATE WRAP								WEIGHT: 1190*
CUSHIONING	2B	MIL-B-121	ON			A	1	
DESICCANT								CUBE: 22.5 cu. ft.
CONTAINER	3C	PPP-B-566	BILL OF MATERIALS	I				
BARRIER								
CONTAINER	3C	PPP-B-636		VAR,SW	CF	AR	WR	
CLOSURE	3C	PPP-T-60			II or IV		1	
BAG								
CLOSURE								PREPARING ACTIVITY

INTERMEDIATE PACK	INT PACK QTY: NONE / STEP	DRAWING SPECIFICATION	ITEM CHARACTERISTICS (MIL-STD-647) SIZE	STYLE	TYPE	GRADE	CLASS	APPROVAL / SOURCE OF

MARKING	INSPECTION- MIL-P-14232 / PROVISION-	LEVEL A PACKING REQ	LEVEL B UNIT PACK REQ	LEVEL D PACKING REQ
		PPP-B-601, Style A, Over-seas		

SPECIFICATIONS, STANDARDS, AND DRAWINGS LISTED OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID FORM A PART OF THIS INSTRUCTION.


NOTES:
A. APPLY TO UNPAINTED, UNPLATED FERROUS METAL SURFACES.
B. CUSHIONING AND WRAP AS REQUIRED TO PREVENT METAL TO WOOD CONTACT.
C. SEE SHEETS 8, 9 AND 10 FOR BOX TYPE AND SIZE.
D. SHIPPING CONTAINER FOR LEVEL C SHALL BE AS SPECIFIED FOR LEVEL A EXCEPT THAT BOX SHALL BE DOMESTIC TYPE.

X-4033A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.


APPENDIX

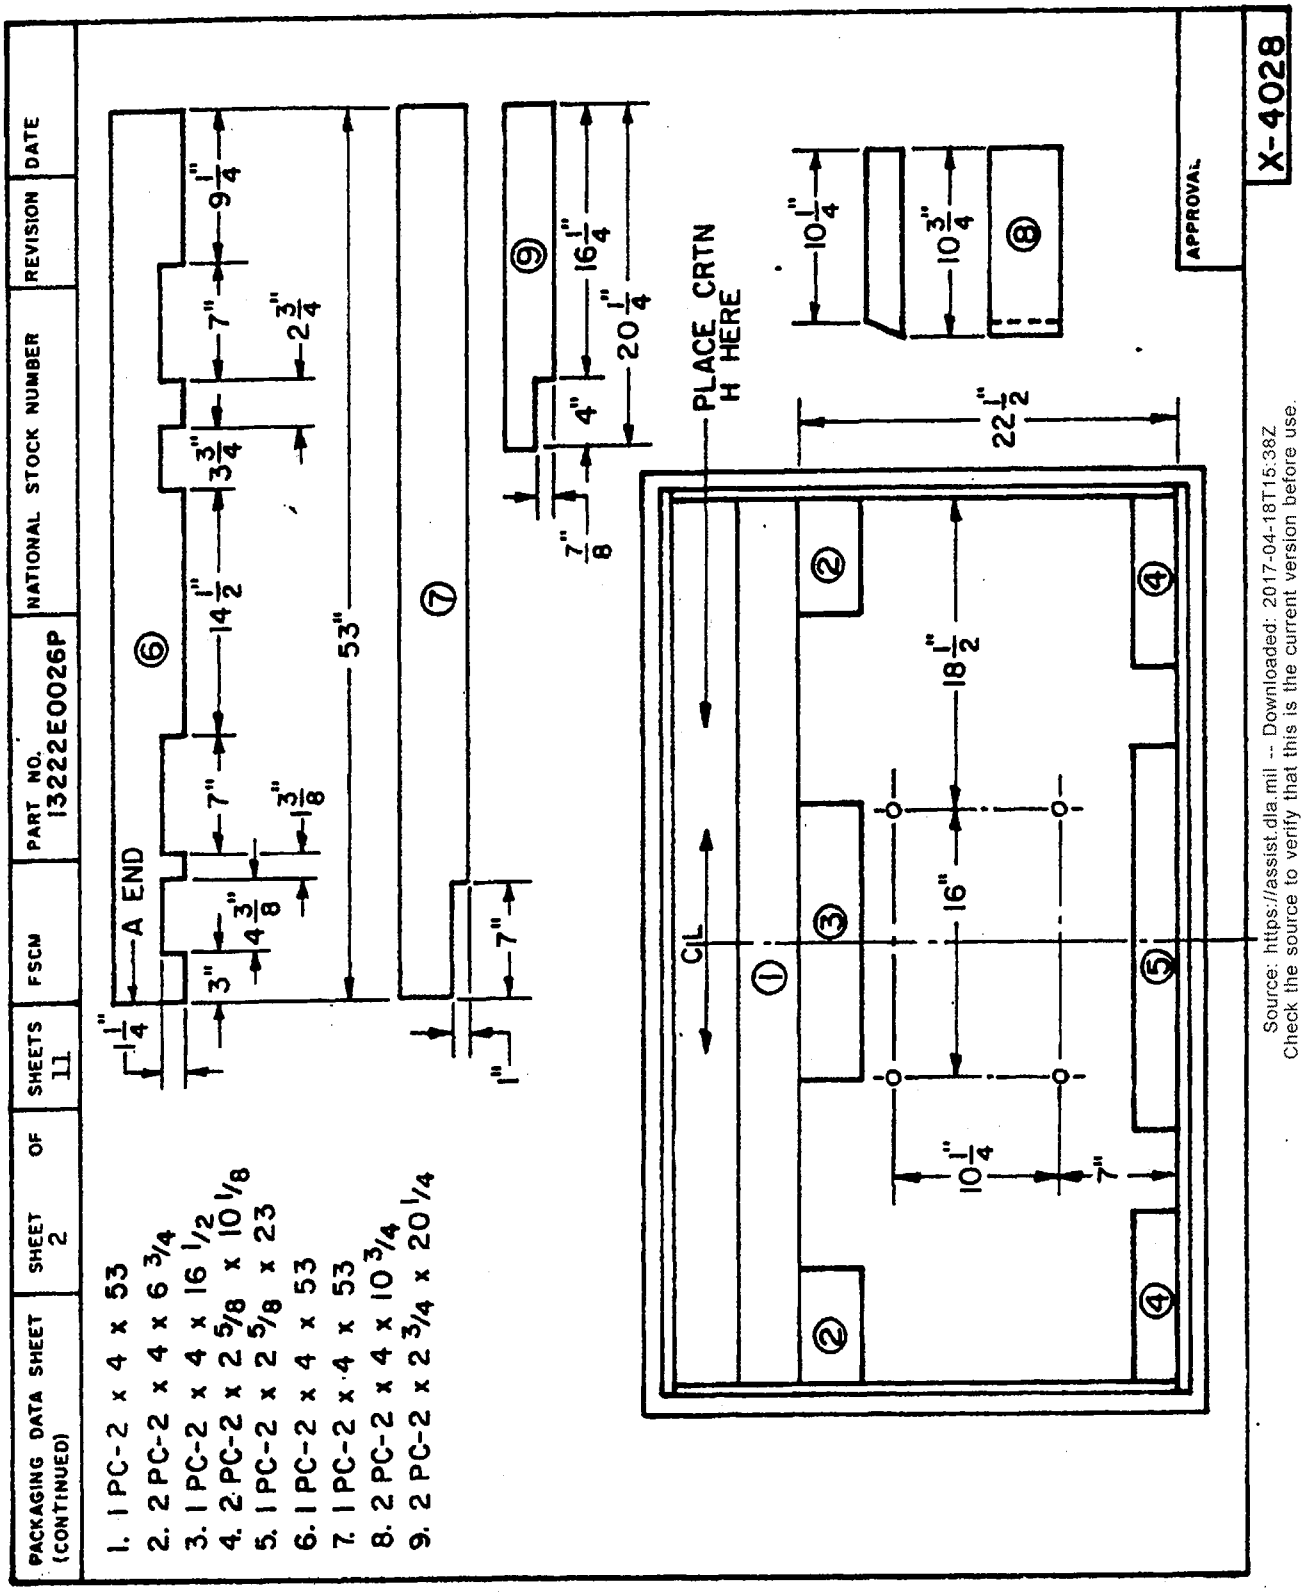

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

APPENDIX

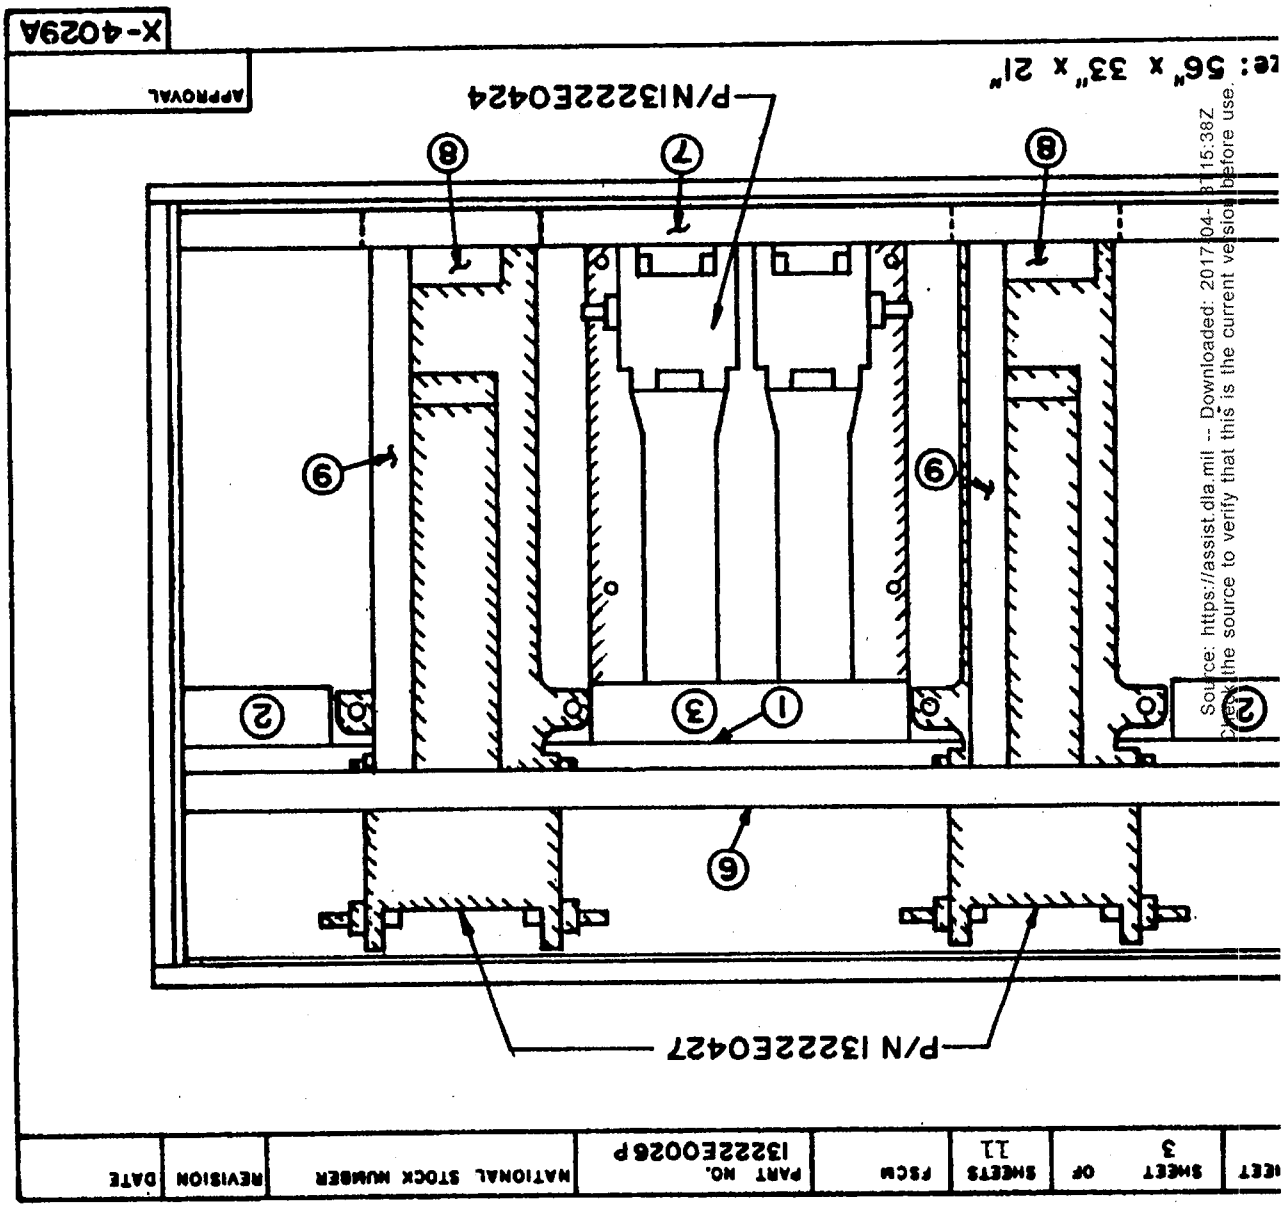


Source: https://assist.dla.mil -- Downloaded: 2017-04-[illegible]15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

SHEET OF	SHEETS	FSCM	PART NO.	NATIONAL STOCK NUMBER	REVISION	DATE
4	11		13222E0026P			

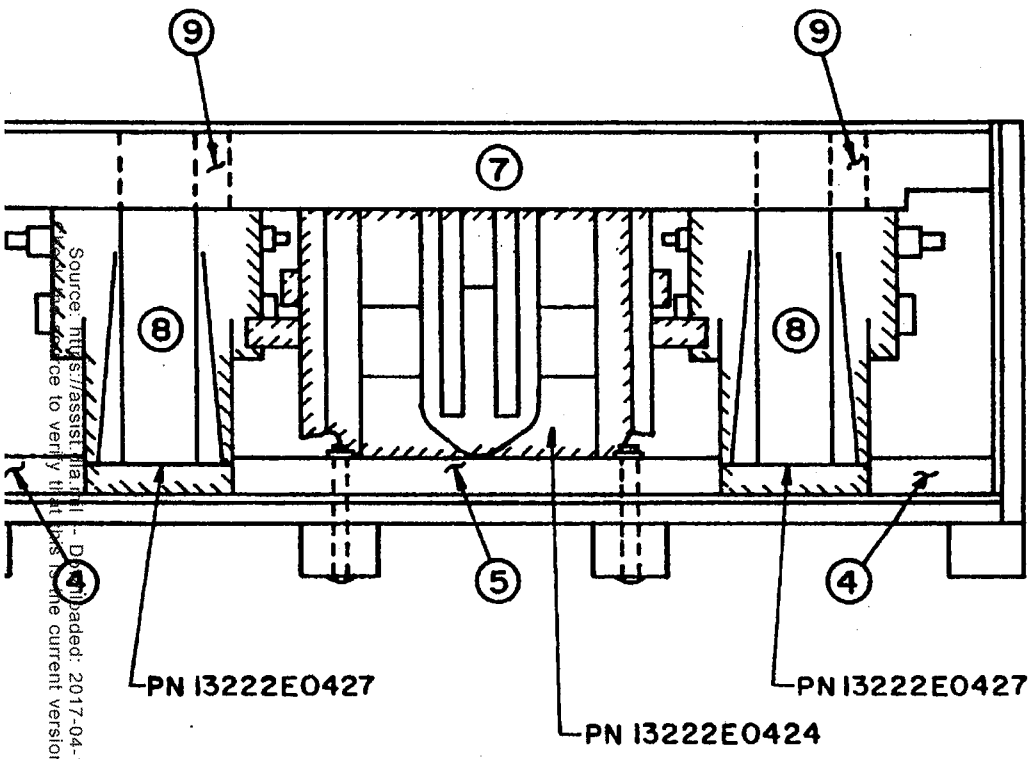


Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

APPROVAL
X-4030

APPENDIX

PACKAGING DATA SHEET (CONTINUED)	SHEET 5 OF	SHEETS 11	FSCM	PART NO. 13222E0026P	NATIONAL STOCK NUMBER	REVISION	DATE


APPROVAL X-4031

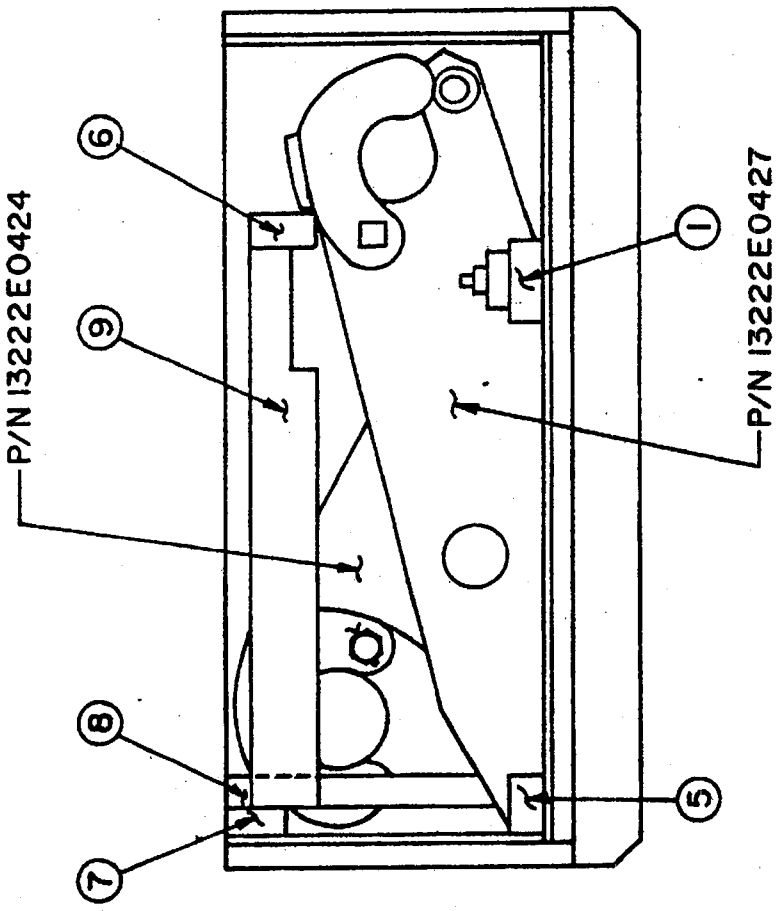

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

APPENDIX

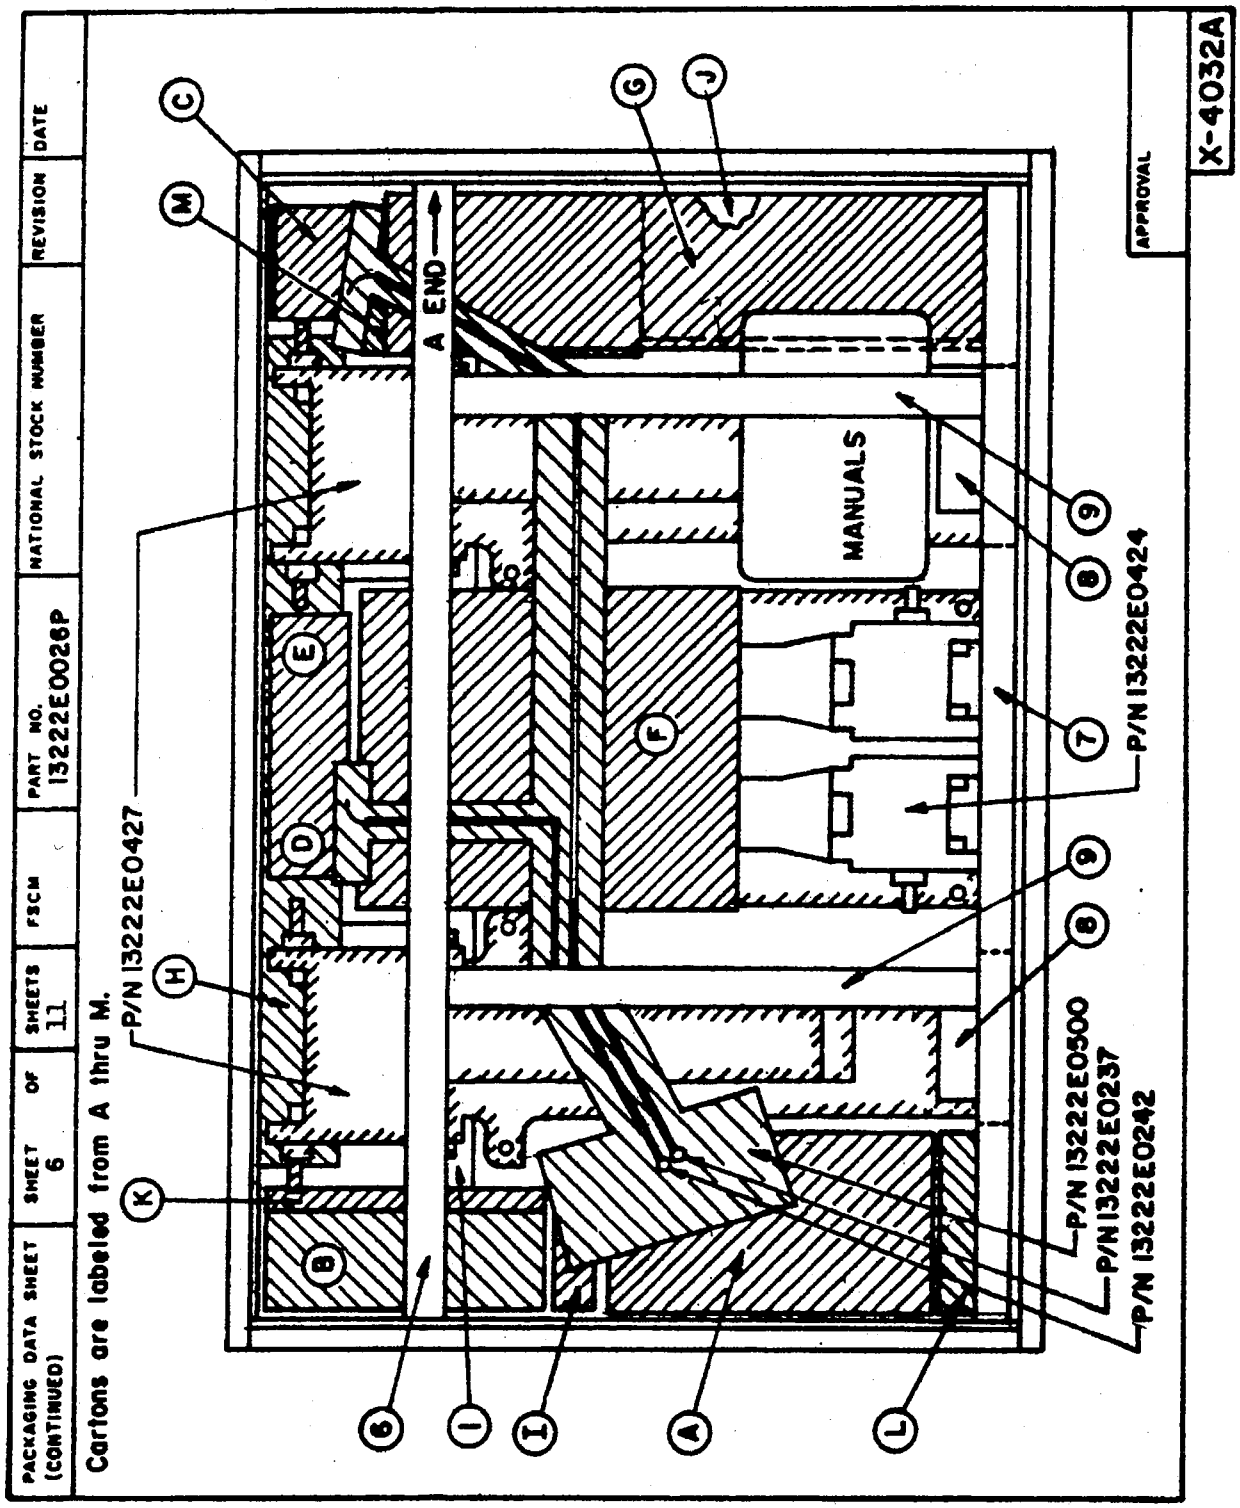

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Packaging Data Sheet (continued)	Sheet of 7	Sheets 11	FSCM	Part No. 13222E0026P	National Stock No.	Revision	Date

INSTRUCTIONS:

1. Cut and install blocking to base as shown on sheet #2.
2. Lay out drill and install mounting bolts for P/N 13222E0424 in base as shown on sheet #2.
3. Install P/N 13222E0424 over bolts, with movable retainers, over block 5. Tighten (see sheet 3: use GD. A cushioning as required to prevent wood contact with metal).
4. Prepack all miscellaneous parts per lists. (See sheets 8, 9, and 10).
5. Position carton H (containing two 13222E0432 tie rods) on box base between block 1 and box side (see sheet #2).
6. Install 2 ea. P/N 13222E0427 on base between blocking as shown on sheets 2 and 3 (use GD. A cushioning as required to prevent wood contact with metal).
7. Position balance of items A thru M (see sheets 8, 9 and 10) in box so that cartons fill void areas around PIN 13222E0427 and P/N 13222E0424 (see sheet #6).
8. Place P/N 13222E0242 and P/N 13222E0237 (see 5.2.2) in P/N 13222E0500 and tape in position. Clips P/N 13222EO031 (3 each) and retainer P/N 13222E0440 (1 each) to be taped to P/N 13222EO034 cover.
9. Place P/N 13222E0500 (inside up) into box as shown on sheet #6. (Use GD. A cushioning as required to prevent metal to metal contact.)
10. Position blockings 6, 7 and 8 as shown on sheets 3, 4, 5 and 6 so that P/N 13222E0500 fits into cutouts in block #6. (Use GD. A cushioning as required to prevent wood contact with metal.
11. Position blockings #9 as shown on sheets 3, 4, 5 and 6 so that cut outs fit over P/N 13222E0500. (Use GD. A cushioning as required to prevent wood contact with metal). Nail blockings 6, 7, 8 and 9 in place.
12. Place one each TM5-2590-214-10 manual and one each TM5-2590-214-23 and P manual, one each canvas pouch (NSN 7520-00-559-9618) in poly bag. Heat seal bag and place in box as shown on sheet 6.
13. Close box and install banding.
14. Mark for shipment and storage in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Packaging Data Sheet (continued)	Sheet of 8	Sheets 11	FSCM	Part No. 13222E0026P	National Stock No.	Revision	Date

ITEM	PART NUMBER	PART DESCRIPTION	QTY.	PKG. MATERIAL	PKG. INSTRUCTIONS
A	13222E0331	BASE GASKET QUICK DISCONNECT	2	PPP-B-636 CRTN. PPP-T-60 TAPE	PUT IN CRTN. TAPE, IDENTIFY CRTN. SIZE 9-3/4 x 8-3/4 x 1/2 OPF
B	13222E0486	HANDLE, QUICK DIS. MECH.	1	GD. A WRAP AS REQ.	PRES. GD. A WRAP IDENTIFY SIZE 16-1/2 x 4 x 3
C	MS 90728-233	BOLTS	12	PPP-B-566 CRTN. PPP-T-60 TAPE GD. A WRAP AS REQ.	PRES. GD. A WRAP, PUT INTO CRTN., TAPE, IDENTIFY CRTN., SIZE 9 x 5 x 3-1/2
D	13222E0053	QUICK, DIS. MECH, RIGHT	1	PPP-B-566 CRTN. PPP-T-60 TAPE GD. A WRAP AS REQ.	PRES. GD. A WRAP, PUT INTO CRTN., TAPE, IDENTIFY CRTN., SIZE 10 x 9 x 7
E	13222E0052	QUICK, DIS. MECH, LEFT	1	PPP-B-566 CRTN. PPP-T-60 TAPE GD. A WRAP AS REQ.	PRES. GD. A. WRAP, PUT INTO CRTN., IDENTIDY CRTN., SIZE 10 x 9 x 7
F	13222E0459 13222E0499 13222E0435	HYD. PUMP ASSY, RETAINER, PUMP HANDLE PUMP BASE	1 1 1	PPP-B-636 CRTN. PPP-T-60- TAPE GD. A WRAP AS REQ.	PRES. GD. A WRAP, PUT INTO CRTN., IDENTIFY CRTN., SIZE 18 x 11-1/2 x 5
G	13222E0425	HOOK ROD ASSY	2	PPP-B-566 CRTN. PPP-T-60 TAPE GD. A WRAP AS REQ.	PRES. GD. A WRAP, PUT INTO CRTN., TAPE, IDENTIFY CRTN., SIZE 19 x 7 x 6
H	13222E0432	TIE ROD ASSY	2	PPP-B-636 CRTN. PPP-T-60 TAPE GD. A WRAP AS REQ.	PRES. GD. A. WRAP, PUT INTO CRTN., TAPE, IDENTIFY CRTN., SIZE 41 x 4 x 3-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Packaging Data Sheet (continued)	Sheet of 9	Sheets 11	FSCM	Part No. 13222E0026P	National Stock No.	Revision	Date

ITEM	PART NUMBER	PART DESCRIPTION	QTY.	PKG. MATERIAL	PKG. INSTRUCTIONS
I	13222E0491	HYD. MARKER ASSY	1	PPP-B-566 CRTN. PPP-T-60 TAPE GD. A WRAP AS REQ.	PRES. GD. A WRAP PUT INTO CRTN., TAPE IDENT CRTN., SIZE 6 x 4 x 4
J	13222E0441	HYD. MANIFOLD ASSY	1	PPP-B-566 CRTN. PPP-T-60 TAPE GD. A WRAP AS REQ.	PRES. GD. A WRAP PUT INTO CRTN., TAPE IDENTIFY CRTN., SIZE 10 x 8 x 4-1/2
K	13222E0423	LOCK ROD ASSY	2	PPP-B-566 CRTN. PPP-T-60 TAPE GD. A WRAP AS REQ.	PRES. GD. A. WRAP, PUT INTO CRTN., TAPE, IDENT CRTN., SIZE 18 x 5 x 3
L	13222E0447	HYDRAULIC VALVE ASSY INCLUDING HYDRAULIC HOSES	1	PPP-B-636 PPP-T-60 TAPE GD. A WRAP AS REQ.	PRES., GD. A. WRAP, PUT INTO CRTN., TAPE, IDENTIFY CRTN., SIZE 9 x 5-1/2 x 4-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Packaging Data Sheet (continued)	Sheet of 10	Sheets 11	FSCM	Part No. 13222E0026P	National Stock No.	Revision	Date

ITEM	PART NUMBER	PART DESCRIPTION	QTY.	PKG. MATERIAL	PKG. INSTRUCTIONS
1	MS-35338-148	LOCKWASHER	12	GD. A BAG 9-1/2 x 7-1/2	PRES., PUT INTO GD. A BAG, IDENTIFY
2	MS-90728-64	SCREW	10	GD. A BAG 5 x 4	PRES., PUT INTO GD. A. BAG, IDENTIFY
3	MS-90728-7	SCREW	4	GD. A BAG 5 x 4	PRES., PUT INTO GD. A BAG, IDENTIFY
4	13222E0021	CAUTION MARKER	1	GD. A BAG 5 x 4	PRES., PUT INTO GD. A BAG, IDENTIFY
5	MS-90727-6	SCREW	2	GD. A BAG 4-1/2 x 6-1/2	PRES., PUT INTO GD. A BAG, IDENTIFY
6	MS-90728-66	SCREW	2	GD. A BAG 4-1/2 x 6-1/2	PRES., PUT INTO GD. A BAG, IDENTIFY
7	MS-90728-59	SCREW	2	GD. A BAG 4-1/2 x 6-1/2	PRES., PUT INTO GD. A BAG, IDENTIFY
8	MS-35338-44	LOCKWASHERS	9	GD. A BAG 4-1/2 x 6-1/2	PRES., PUT INTO GD. A BAG, IDENTIFY
9	MS-90728-6	SCREWS	3	SELF SEAL ENV. 2-1/2 x 3-1/2	PRES., PUT INTO ENV. IDENTIFY
10	MS-35207-245	SCREWS	2	SELF SEAL ENV. 2-1/2 x 3-1/2	PRES., PUT INTO ENV. IDENTIFY
11	MS-27183-14	WASHERS	2	SELF SEAL ENV. 2-1/2 x 3-1/2	PRES., PUT INTO ENV. IDENTIFY
12	MS-27183-10	WASHERS	3	SELF SEAL ENV. 2-1/2 x 3-1/2	PRES., PUT INTO ENV. IDENTIFY

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Packaging Data Sheet (continued)	Sheet of 11	Sheets 11	FSCM	Part No. 13222E0026P	National Stock No.	Revision	Date

ITEM	PART NUMBER	PART DESCRIPTION	QTY.	PKG. MATERIAL	PKG. INSTRUCTIONS
13	MS-35338-42	LOCKWASHER	2	SELF SEAL ENV. 2-1/2 x 3-1/2	PRES., PUT INTO ENV. IDENTIFY
14	MS-35338-46	LOCKWASHER	21	SELF SEAL ENV. 2-1/2 x 3-1/2	PRES., PUT INTO ENV. IDENTIFY
15	MS-90728-69	SCREW	2	SELF SEAL ENV. 2-1/2 x 3-1/2	PRES., PUT INTO ENV. IDENTIFY
16	MS-90728-71	SCREW	2	SELF SEAL ENV. 2-1/2 X 3-1/2	PRES., PUT INTO ENV. IDENTIFY
17	MS-90728-58	SCREW	3	SELF SEAL ENV. 2-1/2 x 3-1/2	PRES. PUT INTO ENV. IDENTIFY
M	Items 1 thru 17	See Above	See Above	PPP-B-566 CRTN. PPP-T-60 TAPE	PACK ITEMS 1 THRU 17 INTO CRTN., 12 x 8-1/2 x 4-1/2, TAPE, IDENTIFY

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-M-53008(ME) Mounting Kit, Roller, Mine Clearing: Track-Width, Tank-Mounted

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
USA Mobility Equipment R & D Command
Attn: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2017-04-18T15:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:49Z
Check the source to verify that this is the current version before use.