This military standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities: Army -- Navy -- Air Force - DSA-IS

User: Army - ME Navy - MC Air Force - DSA -

DD FORM 672-1

P.A. Air Force - 11
Other Cust Army - AV Navy - AS

PROCUREMENT SPECIFICATION

SUPERSEDES:

TITLE

NUT, SPANNER, BEARING RETAINING, AERONAUTICAL

MILITARY STANDARD


MS 172236 THRU MS 172270

SHEET 1 OF 3

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Proj No. 3110-0457

MS172236 THRU MS172270

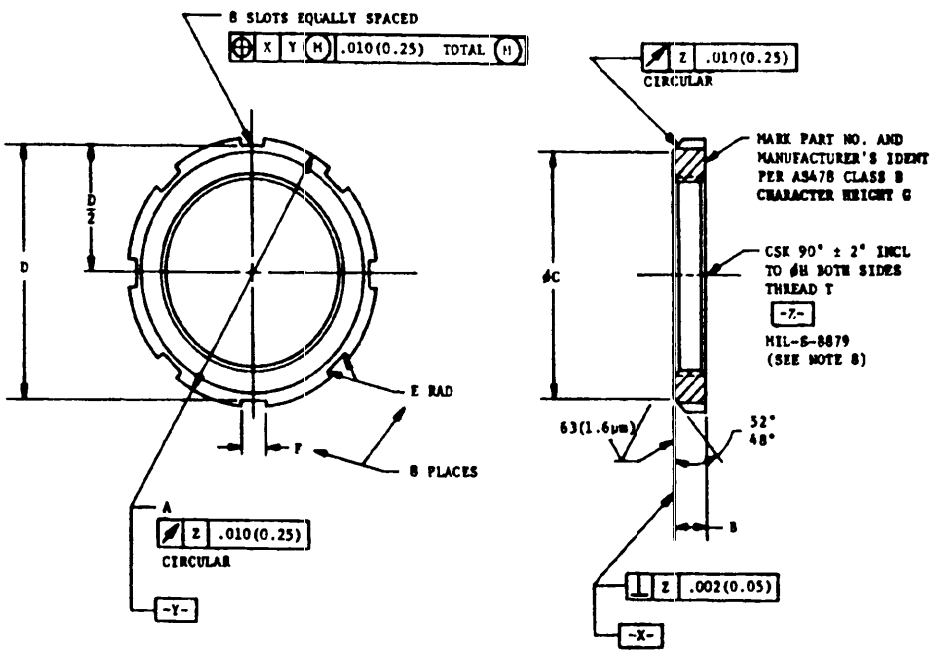

1. MATERIAL: STEEL AMS 6381 OR AMS 6382.
2. HARDNESS: 26-32 HRC. HARDEN (OIL QUENCH) AND TEMPER.
3. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AND AS 1071.
4. SURFACE TEXTURE: ANSI B46.1-1962, UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES (3.2 MICROMETRES).
5. DIMENSIONING AND TOLERANCING: ANSI Y14.5-1966, ø = DIAMETER.
6. BREAK SHARP EDGES .003-.015 (0.08-0.38) UNLESS OTHERWISE SPECIFIED.
7. DIMENSIONS IN INCHES (MILLIMETRES). METRIC CONVERSIONS IN PARENTHESES ARE INTERNATIONAL SYSTEM (SI).
8. THREADS IN ACCORDANCE WITH MIL-S-7742 ARE ACCEPTABLE UNTIL 30 AUGUST 1976.
9. DO NOT USE UNASSIGNED PART NUMBERS.

(B) ENTIRE STANDARD REVISED.

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

THIRD ANGLE PROJECTION

FED. SUP CLASS 3110

APPROVED 30Jan52 REVISED (A) 20Dec57 (B) 16 Dec 74

Source: https://assist.dla.mil -- Downloaded: 20240-23T20:45Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities: Army, Navy, Air Force, DSA - 15

User: Army - ME, Navy - MC, Air Force, DSA

MS172236 THRU MS172270

PART NO.	NOMINAL BEARING BORE DIAMETER		THREAD	THREAD I								A		B	
				MINOR DIAMETER		PITCH DIAMETER		MAJOR DIA MIN							
	INCH	mm	DESIGNATION	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm
MS172236	.3937	10	.391-32 UNJS-3B	.3606- .3649	9.159- 9.268	.3707- .3733	9.416- 9.481	.391	9.94	.704- .724	17.89- 18.38	.173-.193	4.40- 4.90
MS172237	.4724	12	.469-32 UNJS-3B	.4386- .4429	11.141- 11.249	.4487- .4513	11.397- 11.463	.469	11.92	.797- .817	20.25- 20.75	.173-.193	4.40- 4.90
MS172238	.5906	15	.586-32 UNJS-3B	.5556- .5599	14.113- 14.221	.5657- .5687	14.369- 14.444	.586	14.89	.923- .943	23.45- 23.95	.209-.229	5.31- 5.81
MS172239	.6693	17	.664-32 UNJS-3B	.6336- .6366	16.094- 16.169	.6437- .6467	16.350- 16.426	.664	16.87	1.047-1.067	26.60- 27.10	.209-.229	5.31- 5.81
MS172259	.7874	20	.781-32 UNJS-3B	.7506- .7540	19.066- 19.151	.7607- .7641	19.322- 19.408	.781	19.84	1.173-1.193	29.80- 30.30	.240-.260	6.10- 6.60
MS172241	.9843	25	.969-32 UNJS-3B	.9386- .9420	23.841- 23.926	.9487- .9521	24.097- 24.183	.969	24.62	1.360-1.380	34.55- 35.05	.240-.260	6.10- 6.60
MS172242	1.1811	30	1.173-18 UNJS-3B	1.1189-1.1230	28.421- 28.524	1.1369-1.1409	28.878- 28.978	1.173	29.80	1.673-1.693	42.50- 43.00	.271-.291	6.89- 7.39
MS172243	1.3780	35	1.376-18 UNJS-3B	1.3219-1.3260	33.577- 33.680	1.3399-1.3439	34.034- 34.135	1.376	34.96	1.891-1.911	48.04- 48.53	.271-.291	6.89- 7.39
MS172244	1.5748	40	1.563-18 UNJS-3B	1.5089-1.5134	38.327- 38.440	1.5269-1.5314	38.784- 38.897	1.563	39.70	2.079-2.099	52.81- 53.31	.271-.291	6.89- 7.39
MS172245	1.7717	45	1.767-18 UNJS-3B	1.7129-1.7174	43.508- 43.621	1.7309-1.7354	43.965- 44.079	1.767	44.89	2.297-2.317	58.35- 58.85	.302-.322	7.68- 8.17
MS172246	1.9685	50	1.967-18 UNJS-3B	1.9129-1.9174	48.568- 48.701	1.9309-1.9354	49.045- 49.159	1.967	49.97	2.485-2.505	63.12- 63.62	.302-.322	7.68- 8.17
MS172247	2.1654	55	2.137-18 UNJS-3B	2.1019-2.1080	53.416- 53.543	2.1209-2.1260	53.871- 54.000	2.157	54.79	2.735-2.755	69.47- 69.97	.302-.322	7.68- 8.17
MS172248	2.3622	60	2.360-18 UNJS-3B	2.3019-2.3110	58.470- 58.699	2.3239-2.3290	59.027- 59.156	2.360	59.95	2.923-2.943	74.25- 74.75	.334-.354	8.49- 8.99
MS172249	2.5591	65	2.548-18 UNJS-3B	2.4939-2.4990	63.346- 63.474	2.5119-2.5170	63.803- 63.931	2.548	64.72	3.110-3.130	79.00- 79.50	.334-.354	8.49- 8.99
MS172250	2.7559	70	2.751-18 UNJS-3B	2.6969-2.7020	68.502- 68.631	2.7149-2.7200	68.959- 69.088	2.751	69.88	3.329-3.349	84.56- 85.06	.334-.354	8.49- 8.99
MS172251	2.9528	75	2.933-12 UNJS-3B	2.8518-2.8572	72.436- 72.563	2.8789-2.8843	73.124- 73.261	2.933	74.50	3.673-3.693	93.30- 93.80	.365-.385	9.28- 9.77
MS172252	3.1496	80	3.137-12 UNJS-3B	3.0518-3.0617	77.618- 77.767	3.0829-3.0888	78.306- 78.455	3.137	79.68	3.891-3.911	98.84- 99.33	.365-.385	9.28- 9.77
MS172253	3.3465	85	3.340-12 UNJS-3B	3.2518-3.2662	82.774- 82.958	3.2859-3.2933	83.462- 83.649	3.340	84.84	4.110-4.130	104.40-104.90	.365-.385	9.28- 9.77
MS172254	3.5433	90	3.527-12 UNJS-3B	3.4458-3.4532	87.524- 87.711	3.4719-3.4803	88.212- 88.399	3.527	89.59	4.297-4.317	109.13-109.65	.365-.385	9.28- 9.77
MS172255	3.7402	95	3.730-12 UNJS-3B	3.6448-3.6562	92.680- 92.867	3.6759-3.6833	93.368- 93.555	3.730	94.75	4.316-4.336	114.71-115.21	.396-.416	10.06-10.56
MS172256	3.9370	100	3.918-12 UNJS-3B	3.8438-3.8442	97.655- 97.657	3.8639-3.8713	98.143- 98.331	3.918	99.52	4.704-4.724	119.48-119.98	.396-.416	10.06-10.56
MS172257	4.1339	105	4.122-12 UNJS-3B	4.0408-4.0491	102.722-102.847	4.0679-4.0762	103.325-103.535	4.122	104.70	4.891-4.911	124.24-124.73	.396-.416	10.06-10.56
MS172258	4.3307	110	4.325-12 UNJS-3B	4.2438-4.2521	107.793-108.003	4.2709-4.2792	108.481-108.691	4.325	109.86	5.110-5.130	129.80-130.30	.396-.416	10.06-10.56

FED. SUP CLASS 3110

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 30Jan52 REVISED (A) 20Dec57 (B) FOR CHANGES SEE SHEETS 1 THRU 3

P.A. Air Force - II
Other Cust
Army - AV
Navy - AS

TITLE: NUT, SPANNER, BEARING RETAINING, AERONAUTICAL

PROCUREMENT SPECIFICATION

SUPERSEDES:

MILITARY STANDARD
MS 172236 THRU 172270

SHEET 2 OF 3

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Proj. No. 3110-0457

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:45Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review activities:
Army
Navy
Air Force
DSA - IS

User:
Army - ME
Navy - MC
Air Force
DSA

DD FORM 672-1

P.A. Air Force - 11
Other Cust
Army - AV
Navy - AS

PROCUREMENT SPECIFICATION

SUPERSEDES

TITLE

NUT, SPANNER, BEARING RETAINING, AERONAUTICAL

MILITARY STANDARD

MS 172236 THRU MS 172270

SHEET 3 OF 3

Proj. No

MS172236 THRU MS172270

PART NO.	C		D		E		F		G		H		APPROXIMATE MASS	
	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	LB	kg
MS172236	.511- .531	12.98- 13.48	.584- .604	14.84- 15.34	.000-.020	0.00-0.50	.115-.135	2.93- 3.42	.030-.090	0.77-2.28	.391- .411	9.94- 10.43	.010	0.005
MS172237	.605- .625	15.37- 15.87	.678- .698	17.23- 17.72	.000-.020	0.00-0.50	.115-.135	2.93- 3.42	.030-.090	0.77-2.28	.469- .489	11.92- 12.42	.014	0.006
MS172238	.730- .750	18.55- 19.05	.802- .822	20.38- 20.87	.000-.020	0.00-0.50	.115-.135	2.93- 3.42	.030-.090	0.77-2.28	.586- .606	14.89- 15.39	.021	0.010
MS172239	.855- .875	21.72- 22.22	.928- .948	23.58- 24.07	.000-.020	0.00-0.50	.115-.135	2.93- 3.42	.030-.090	0.77-2.28	.664- .684	16.87- 17.37	.028	0.013
MS172259	.980-1.000	24.90- 25.40	1.052-1.072	26.73- 27.22	.005-.025	0.13-0.63	.178-.198	4.53- 5.02	.030-.090	0.77-2.28	.781- .801	19.84- 20.34	.036	0.016
MS172261	1.168-1.188	29.67- 30.17	1.240-1.260	31.50- 32.00	.005-.025	0.13-0.63	.178-.198	4.53- 5.02	.030-.090	0.77-2.28	.969- .989	24.62- 25.12	.045	0.020
MS172242	1.418-1.438	36.02- 36.52	1.490-1.510	37.85- 38.35	.005-.025	0.13-0.63	.178-.198	4.53- 5.02	.050-.110	1.27-2.79	1.173-1.193	29.80- 30.30	.055	0.025
MS172243	1.636-1.656	41.56- 42.06	1.709-1.729	43.41- 43.91	.005-.025	0.13-0.63	.178-.198	4.53- 5.02	.050-.110	1.27-2.79	1.376-1.396	34.96- 35.45	.067	0.030
MS172244	1.824-1.844	46.33- 46.83	1.896-1.916	48.16- 48.66	.010-.030	0.26-0.76	.240-.260	6.10- 6.60	.050-.110	1.27-2.79	1.563-1.583	39.71- 40.20	.074	0.034
MS172245	2.042-2.062	51.87- 52.37	2.115-2.135	53.80- 54.22	.010-.030	0.26-0.76	.240-.260	6.10- 6.60	.090-.150	2.29-3.81	1.767-1.787	44.89- 45.38	.134	0.061
MS172246	2.230-2.250	56.65- 57.15	2.302-2.322	58.48- 58.97	.010-.030	0.26-0.76	.240-.260	6.10- 6.60	.090-.150	2.29-3.81	1.967-1.987	49.97- 50.46	.164	0.046
MS172247	2.480-2.500	63.00- 63.50	2.552-2.572	64.83- 65.32	.010-.030	0.26-0.76	.240-.260	6.10- 6.60	.090-.150	2.29-3.81	2.157-2.177	54.79- 55.29	.180	0.082
MS172248	2.668-2.688	67.77- 68.27	2.740-2.760	69.60- 70.10	.010-.030	0.26-0.76	.240-.260	6.10- 6.60	.090-.150	2.29-3.81	2.360-2.380	59.95- 60.45	.211	0.096
MS172249	2.855-2.875	72.52- 73.02	2.928-2.948	74.38- 74.87	.010-.030	0.26-0.76	.240-.260	6.10- 6.60	.090-.150	2.29-3.81	2.548-2.568	64.72- 65.22	.226	0.103
MS172250	3.074-3.094	78.08- 78.58	3.146-3.166	79.91- 80.41	.010-.030	0.26-0.76	.240-.260	6.10- 6.60	.090-.150	2.29-3.81	2.751-2.771	69.88- 70.38	.252	0.114
MS172251	3.355-3.375	85.22- 85.72	3.428-3.448	87.08- 87.57	.015-.035	0.39-0.88	.365-.385	9.28- 9.77	.090-.150	2.29-3.81	2.933-2.953	74.50- 75.00	.371	0.168
MS172252	3.574-3.594	90.78- 91.28	3.646-3.666	92.61- 93.11	.015-.035	0.39-0.88	.365-.385	9.28- 9.77	.090-.150	2.29-3.81	3.137-3.157	79.68- 80.18	.405	0.184
MS172253	3.792-3.812	96.32- 96.82	3.865-3.885	98.18- 98.67	.015-.035	0.39-0.88	.365-.385	9.28- 9.77	.090-.150	2.29-3.81	3.340-3.360	84.84- 85.34	.440	0.200
MS172254	3.980-4.000	101.10-101.60	4.052-4.072	102.93-103.42	.015-.035	0.39-0.88	.365-.385	9.28- 9.77	.090-.150	2.29-3.81	3.527-3.547	89.59- 90.09	.464	0.210
MS172255	4.199-4.219	106.66-107.16	4.271-4.291	108.49-108.99	.015-.035	0.39-0.88	.365-.385	9.28- 9.77	.090-.150	2.29-3.81	3.730-3.750	94.75- 95.25	.546	0.248
MS172256	4.386-4.406	111.41-111.91	4.459-4.479	113.26-113.76	.015-.035	0.39-0.88	.365-.385	9.28- 9.77	.090-.150	2.29-3.81	3.918-3.938	99.52-100.02	.572	0.259
MS172257	4.574-4.594	116.18-116.68	4.646-4.666	118.01-118.51	.020-.040	0.51-1.01	.490-.510	12.45-12.97	.090-.150	2.29-3.81	4.122-4.142	104.70-105.20	.577	0.262
MS172258	4.792-4.812	121.72-122.22	4.865-4.885	123.58-124.07	.020-.040	0.51-1.01	.490-.510	12.45-12.97	.090-.150	2.29-3.81	4.325-4.345	109.83-110.36	.620	0.281

FED. SUP CLASS 3110

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 30Jan52 REVISED (A) 20Dec57 (B) FOR CHANGES SEE SHEETS 1 THRU 3

Source: https://assist.dla.mil -- Downloaded: 20260-23T20:45Z
Check the source to verify that this is the current version before use.