

FED. SUP CLASS
6240

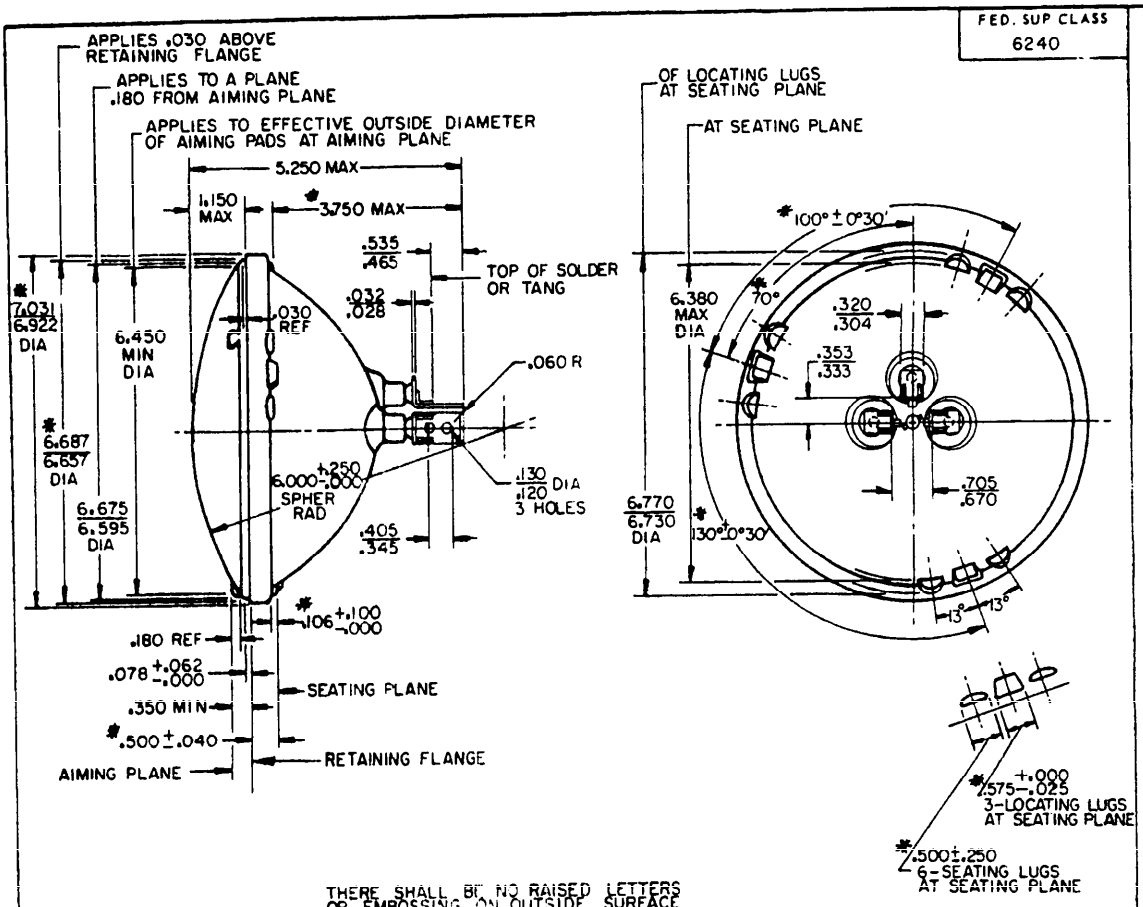

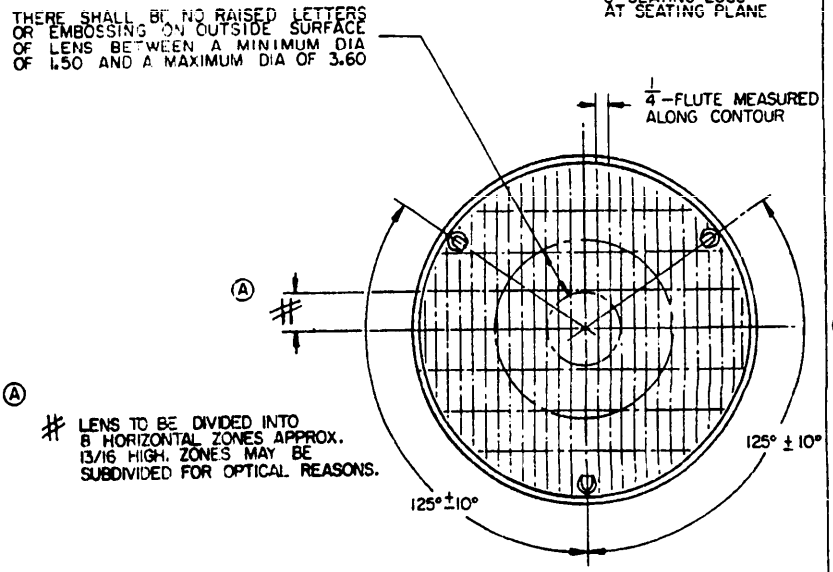

Ⓐ

ARMY MS PART NO.	RATED VOLTS	RATED WATTS	DESIGN VOLTS	DESIGN AMPS	FILAMENT TYPE	RATED AVG. LAB LIFE	DESCRIPTION
MS 18010-4801	24	80/60	28/28	2.86/2.14	CC6/CC6	400/400 HRS.	CLEAR GLASS LENS, PRISMATIC-60w. FILAMENT SHIELD

P.A. ARMY-AT Other Cust NAVY-SH AF-I

INTERNATIONAL INT. ABCA NATO

TITLE
LAMP, INCANDESCENT-SEALED BEAM, PAR 56, HEADLAMP, 24 VOLT, 3 CONTACT LUG TYPE

PROCUREMENT SPECIFICATION W-L-50

SUPERSEDES

MILITARY STANDARD
MS 18010
SHEET 1 OF 3

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER ACTIVITY: NAVY-YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


APPROVED 23 NOVEMBER 1962 REVISED Ⓐ 16 DECEMBER 1968

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
6240

PHOTOMETRIC TEST POINTS

SEE TABLE I FOR TEST POINT VALUES

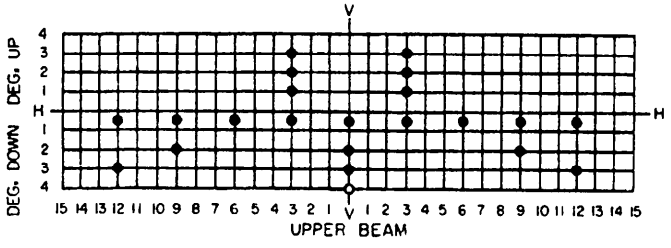

UPPER BEAM

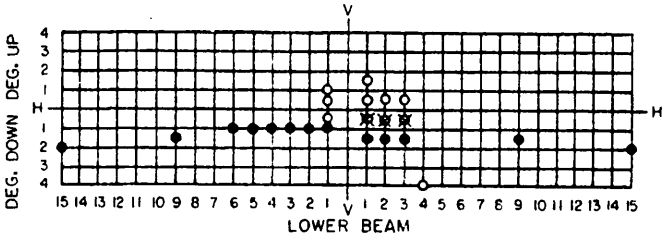

LOWER BEAM

○ — MAXIMUM CANDLEPOWER POINT
● — MINIMUM CANDLEPOWER POINT
▣ — MAX & MIN CANDLEPOWER POINT

TABLE I
PHOTOMETRIC TEST POINT VALUES
MEASURED 60 FEET FROM LAMP

UPPER BEAM		
POSITION	C.P. MAX	C.P. MIN
3U – 3R & 3L	—	500
2U – 3R & 3L	—	1000
1U – 3R & 3L	—	2000
1/2 D – V	—	20000
1/2 D – 3R & 3L	—	10000
1/2 D – 6R & 6L	—	3250
1/2 D – 9R & 9L	—	1500
1/2 D – 12R & 12L	—	750
2D – V	—	5000
2D – 9R & 9L	—	1500
3D – V	—	2500
3D – 12R & 12L	—	750
4D – V	7500	—
MAXIMUM	37500	—

LOWER BEAM		
POSITION	C.P. MAX	C.P. MIN
1-1/2 U – 1R TO RIGHT	1000	—
1U – 1L TO LEFT	500	—
1/2 U – 1R TO 3R	2000	—
1/2 U – 1L TO LEFT	800	—
1/2 D – 1R TO RIGHT	10000	—
1/2 D – 1R, 2R OR 3R	10000	2000
1/2 D – 1L TO LEFT	2000	—
1D – 1L TO 6L	—	750
1-1/2 D – 1R, 2R OR 3R	—	4000
1-1/2 D – 9R & 9L	—	750
2D – 15R & 15L	—	500
4D – 4R	12500	—
10 – 90 U @	125	—

@ – FROM NORMALLY EXPOSED SURFACE OF LENS

APPROVED 23 NOVEMBER 1962 REVISED (A) FOR CHANGES SEE SHEETS 1 & 3

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	INTERNATIONAL INT.	TITLE	MILITARY STANDARD
ARMY-AT Other Cust NAVY-SH AF-11	ABCA NATO	LAMP, INCANDESCENT — SEALED BEAM, PAR 56, HEADLAMP, 24 VOLT, 3 CONTACT LUG TYPE	MS 18010
PROCUREMENT SPECIFICATION W-L-50	SUPERSEDES		SHEET 2

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6240

(A)

NOTES:

1. TYPE IV (MILITARY VEHICLE) OF PROCUREMENT SPECIFICATION.
2. WITH AIMING PLANE NORMAL TO THE PHOTOMETER AXIS, THE BEAM SHALL MEET SPECIFICATIONS IN TABLE I. A TOLERANCE OF ± 1/4 DEGREE IS PERMISSIBLE AT ANY POSITION SHOWN IN TABLE I.
3. MS DASH NUMBER CORRELATES WITH LAMP INDUSTRY TRADE NUMBER.
4. IN ACCORDANCE WITH UNIFORM VEHICLE CODE AND STATE HIGHWAY REGULATIONS, THE MOUNTING HEIGHT OF HEADLAMPS SHALL BE NO LESS THAN 24 OR MORE THAN 54 INCHES FROM THE HORIZONAL CENTERLINE OF THE LAMP TO THE NORMAL GROUND LEVEL.
5. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± .010 ON DECIMALS, ± 1/32 ON FRACTIONS, ± 1° ON ANGLES.
6. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
7. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
9. MARKING SHALL CONSIST OF THE MS DASH NUMBER, VOLTAGE RATING AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

(A) CERTAIN PROVISIONS OF THIS STANDARD, IDENTIFIED BY AN ASTERISK (*) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABCA QSTAG-208, NATO STANAG 4005. WHEN REVISION, OR CANCELLATION OF THIS MILITARY STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 23 NOVEMBER 1962 REVISED (A) FOR CHANGES SEE SHEETS I 83

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A	INTERNATIONAL INT.	TITLE	MILITARY STANDARD
ARMY-AT Other Cust NAVY-SH AF-11	ABCA NATO	LAMP, INCANDESCENT—SEALED BEAM, PAR 56, HEADLAMP, 24 VOLT, 3 CONTACT LUG TYPE	MS 18010
PROCUREMENT SPECIFICATION W-L-50	SUPERSEDES		SHEET 3

DD FORM 1 SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:12Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.