...UIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS ... ...
SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN
THE SOLICITATION MIL-C-26500

REVIEW Air Force - 11, 17, 99

PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY.
AIR FORCE - 85 NAVY.
DLA ES


MIL
CONNECTOR, RECEPTACLE, ELECTRICAL, PIN INSERT, CYLINDRICAL, MINIATURE, HERMETIC, SOLDER MOUNT

MILITARY SPECIFICATION SHEET

(H) denotes change

SUPERSEDING
MIS27034G 14 Nov 77

SPECIFICATION SHEET NUMBER
MS27034H(USAF) 7 Sep 90

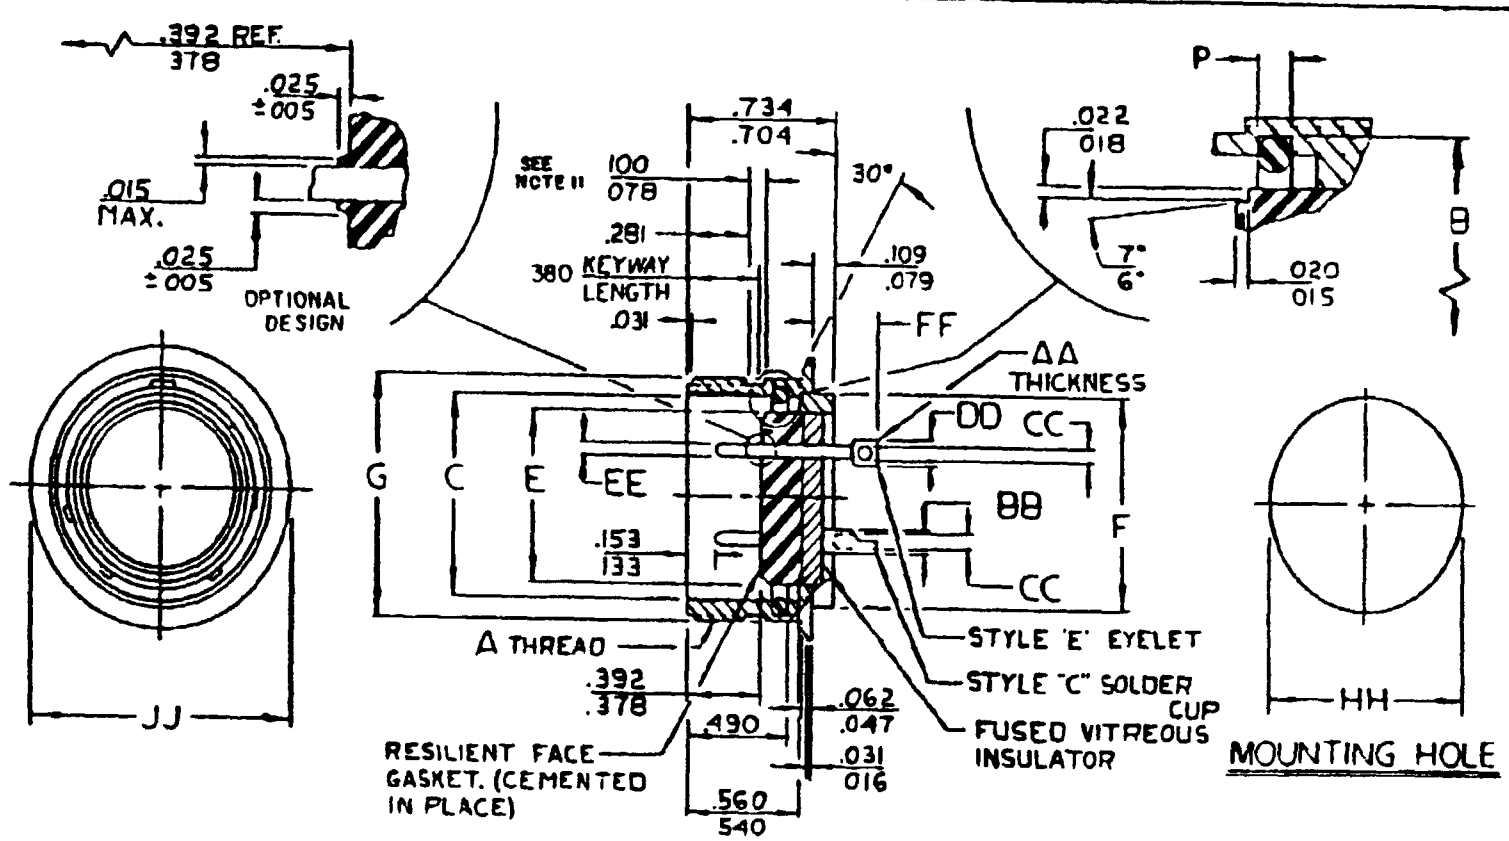

THIS RECEPTACLE MATES WITH MS24266 TYPE "T"
FOR ADDITIONAL DETAILS AND DIMENSIONS APPLICABLE
TO THIS RECEPTACLE, SEE SHEETS 2, 3, 4, 5, AND 6.

HERMETIC (CLASS "H") RECEPTACLES.
TYPE "T" STYLE "P".

INACTIVE FOR AIR FORCE NEW DESIGN EQUIPMENT OR MODIFICATION OF EXISTING EQUIPMENT AFTER 14 NOV 1977.

Use MIL-C-83723, Series III, connector which is interchangeable.

Inches	mm	Inches	mm
.005	0.13	.100	2.54
.015	0.38	.109	2 77
.016	0.41	.133	3.38
.018	0.46	.153	3.89
.019	0.48	.281	7.14
.020	0.51	.378	9.60
.022	0.56	.380	9 65
.025	0.64	.392	9.96
.031	0.79	.490	12.45
.047	1.19	.540	13.72
.062	1.57	.560	14.22
.078	1.98	.704	17.88
.079	2.01	.734	18.64

Form Approved
OMB No. 0704-0188

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:14Z
Check the source to verify that this is the current version before use.

PECIFICATION IS APPROVED FOR USE BY all Departments
Agencies of the Department of Defense.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500


PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY - NAVY - AIR FORCE 85 DLA ES
REVIEW USER Air Force - 11, 17, 99

MILITARY SPECIFICATION SHEET
TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, PIN INSERT, CYLINDRICAL, MINIATURE, HERMETIC, SOLDER MOUNT

SPECIFICATION SHEET NUMBER
MS27034H(USAF)
SUPERSEDING MS27034G
AMSC N/A
14 Nov 77
FSC 5935

Ⓗ denotes change

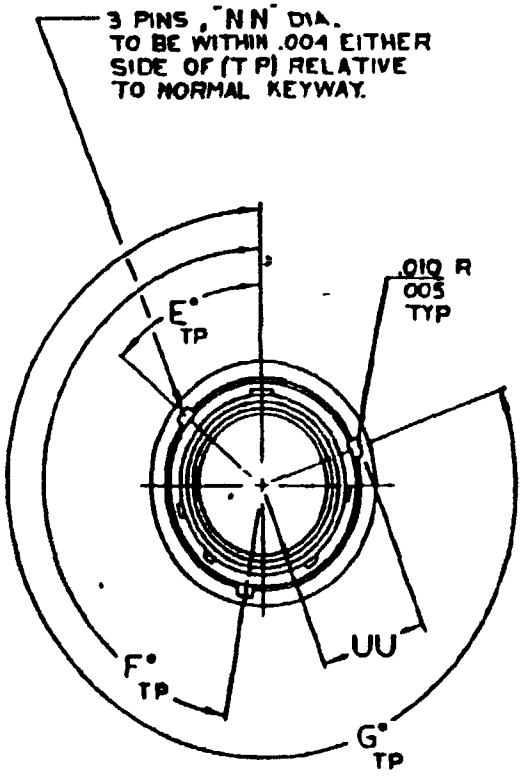

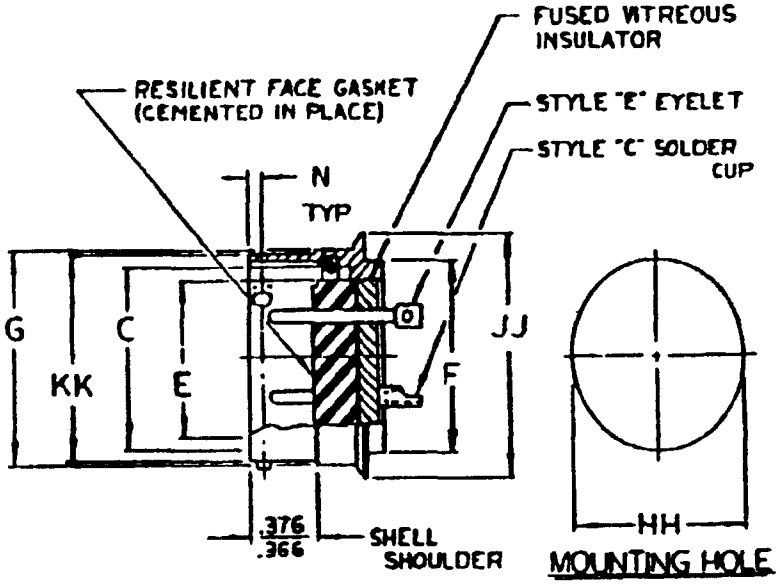

STYLE "P" (PIN INSERT)
HERMETIC (CLASS "H") RECEPTACLES.
TYPE "B"

Inches	mm
.004	0.10
.005	0.13
.010	0.25
.366	9.29
.377	9.57

THIS RECEPTACLE MATES WITH MS 24266 TYPE B

FOR ADDITIONAL DETAILS AND DIMENSIONS APPLICABLE TO THIS RECEPTACLE, SEE SHEETS 1, 3, 4, 5 & 6

Form Approved OMB No 0704-0188

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:14Z
Check the source to verify that this is the current version before use.

Shell size	A CPLG UNEF-2A	B dia	C dia +.005 (0.13) -.000 (0.00)	E max dia insert (see note)	F max dia	G max dia	HH dia +.010 (0.25) -.000 (0.00)	JJ flange dia +.020 (0.51)	KK +.000 (0.00) -.005 (0.13)	N +.000 (0.00) -.004 (0.10)	NN dia +.000 (0.00) -.003 (0.08)	P +0.00 (0.00) -.005 (0.13)	UU +.000 (0.00) -.009 (0.23)
8	.562-24 (14.27)	.505 (12.83)	.428 (10.87)	.312 (7.92)	.437 (11.10)	.561 (14.25)	.442 (11.23)	.705 (17.91)	.536 (13.61)	.101 (2.55)	.078 (1.98)	.076 (1.93)	.310 (7.87)
10	.687-24 (17.45)	.636 (16.15)	.530 (13.46)	.388 (9.86)	.562 (14.27)	.696 (17.68)	.567 (14.40)	840 (21.34)	.659 (16.84)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.374 (9.50)
12	.875-20 (22.22)	.806 (20.47)	.700 (17.78)	.558 (14.17)	.750 (19.05)	.875 (22.22)	.755 (19.18)	1.045 (26.54)	.829 (21.06)	.094 (2.39)	.093 (2.36)	.089 (2.26)	459 (11.65)
14	.937-20 (23.80)	.875 (22.23)	.769 (19.53)	.627 (15.93)	.812 (20.62)	.935 (23.80)	.817 (20.75)	1.090 (27.69)	.898 (22.81)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.494 (12.54)
16	1.062-18 (26.97)	1.002 (25.45)	896 (22.76)	.754 (19.15)	.937 (23.80)	1.062 (26.97)	.942 (23.93)	1.210 (30.73)	1.025 (26.04)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.557 (14.14)
18	1.187-18 (30.15)	1.108 (28.14)	1.002 (25.45)	.860 (21.84)	1.062 (26.97)	1.187 (30.15)	1.067 (27.10)	1.340 (34.04)	1.131 (28.73)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.610 (15.49)
20	1.312-18 (33.32)	1.233 (31.32)	1.127 (28.62)	.985 (25.02)	1.187 (30.15)	1.312 (33.32)	1.187 (30.15)	1.475 (37.46)	1.256 (31.90)	.094 (2.39)	.093 (2.36)	089 (2.26)	673 (17.09)
22	1.437-18 (36.50)	1.358 (34.49)	1.252 (31.80)	1.110 (28.19)	1.312 (33.32)	1.437 (36.50)	1.317 (33.45)	1.590 (40.39)	1.381 (35.08)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.735 (18.66)
24	1.562-18 (39.57)	1.483 (37.67)	1.377 (34.98)	1.235 (31.37)	1.432 (36.50)	1.562 (39.67)	1.437 (36.50)	1.725 (43.82)	1.506 (38.25)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.798 (20.26)

NOTE. Resilient face gasket only.

(H) denotes change

PREPARING ACTIVITY: CUSTODIANS ARMY - AR, AIR FORCE - 85, NAVY - AS, DLA - ES

MILITARY SPECIFICATION SHEET

TITLE: CONNECTOR, RECEPTACLE, ELECTRICAL, PIN INSERT, CYLINDRICAL, [illegible]

SPECIFICATION SHEET NUMBER: MS27034H(USAF)

SUPERSEDING: MS27034G

14 Nov 77

Form Approved OMB No. 0704-0188

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:14Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

FSC/CAGA IS APPROVED FOR USE BY all Departments Agencies of the Department of Defense.

Form Approved
OMB No 0704 0188

Size of contact	Type of contact	AA	BB dia	CC dia min	DD	EE dia	FF max
12	Solder cup		.150 (3.81)	.112 (2.84)		.095/.093 (2.41/2.36)	.400 (10.16)
12	Eyelet	.035 (22.58)		.112 (2.84)	.200 (5.08)	.095/.093 (2.41/2.36)	.400 (10.16)
16	Solder cup		.103 (2.62)	.069 (1.75)		.063/.061 (1.60/1.55)	.400 (10.16)
16	Eyelet	.025 (0.64)		.069 (1.75)	.125 (3.18)	.063/.061 (1.60/1.55)	.400 (10.16)
20	Solder cup		.077 (1.96)	.042 (1.07)		.041/.039 (1.04/0.99)	.330 (8.38)
16	Eyelet	.015 (0.38)		.042 (1.07)	.080 (2.03)	.041/.039 (1.04/0.99)	.330 (8.38)

Position	Shell size 8			Shell size 10			Shell size 12 thru 24		
	E°	F°	G°	E°	F°	G°	E°	F°	G°
Normal	60	180	300	60	180	300	50	170	290
6	46	166	286	46	166	286	50	170	290
7	46	166	286	46	166	286	50	170	290
8	60	180	300	60	180	300	50	170	290
9	89	209	329	89	209	329	50	170	290
10				60	180	300	50	170	290

Ⓗ denotes change

PREPARING ACTIVITY: Air Force - 85
CUSTODIANS: ARMY — NAVY — AIR FORCE - 85 — DLA ES
REVIEW USER: Air Force - 11, 17, 99

MILITARY SPECIFICATION SHEET
TITLE: CONNECTOR, RECEPTACLE, ELECTRICAL, PIN INSERT, CYLINDRICAL, MINIATURE HERMETIC, SOLDER MOUNT

SPECIFICATION SHEET NUMBER: MS27034H(USAF)
SUPERSEDING: MS27034G — 14 Nov 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:14Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

FSC Approved
OMB No. 0704-0188

NOTES

1. Dimensions are in inches
2. Millimeters are in parentheses
3. Metric equivalents are given for general information only
4. All diameters to be concentric with each other within .015 T.I.R.
5. All diameters in the same plane to be concentric with each other within .004 T.I.R.
6. Contacts to be in accordance with MIL-C-26500. True position (T.P.) tolerances specified are for maximum material conditions (M.M.C.).
7. Dimensions in inches, unless otherwise specified, tolerances - decimals ±.005
8. Referenced documents shall be the issue in effect on date of invitations for bid
9. This standard takes precedence over documents referenced herein.
10. For accessories used with this connector, see 3.2.7 of procurement specification
11. Thread relief groove is optional on shell. When groove is omitted, the length of full thread from front of shell shall be .310 minimum and thread runout .385 maximum.
(H) 12. For insert arrangements and alternate insert (keying) position. See MIL-STD-1554

MS27034	-	H	18	T	31	E	N	(Eyelet)
MS27034	-	H	18	T	31	C	N	(Solder cup)

MS shell part number

Class

Shell size

Coupling type

Alternate insert position ("N" used for normal position)

Style

Contact arrangement

Part number examples.

(H) denotes change

PREPARING ACTIVITY: Air Force - 85 CUSTODIANS: ARMY — NAVY — AIR FORCE 85 — DLA 85 REVIEW ACTIVITY: Air Force - 11, 17, 99	MILITARY SPECIFICATION SHEET TITLE: CONNECTOR, RECEPTACLE, ELECTRICAL, PIN INSERT, CYLINDRICAL, MINIATURE, HERMETIC, SOLDER MOUNT	SPECIFICATION SHEET NUMBER: MS27034H(USAF) SUPERSEDING: MS27034G — 14 Nov 77

CREATION APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:14Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

IF REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN SOLICITATION MIL-C-26500

Form Approved
OMB No. 0704-0188

Weight chart

Maximum connector weight in pounds

Pin insert		Pin insert	
MS part no.	Solder cup contacts	MS part no.	Eyelet contacts
MS27034H8T2CN		MS27034H8T2EN	
MS27034H10T2CN	033 (0.84)	MS27034H10T2EN	032 (0.87)
MS27034H10T5CN	033 (0.84)	MS27034H10T5EN	032 (0.87)
MS27034H10T20CN	.034 (0.86)	MS27034H10T20EN	.033 (0.84)
MS27034H12T3CN	.050 (1.27)	MS27034H12T3EN	050 (1.27)
MS27034H12T12CN	.050 (1.27)	MS27034H12T12EN	.049 (1.24)
MS27034H14T3CN		MS27034H14T3EN	
MS27034H14T4CN	.060 (1.52)	MS27034H14T4EN	.059 (1.50)
MS27034H14T7CN	.056 (1.42)	MS27034H14T7EN	.055 (1.40)
MS27034H14T12CN		MS27034H14T12EN	
MS27034H14T15CN	.058 (1.47)	MS27034H14T15EN	.057 (1.45)
MS27034H16T10CN		MS27034H16T10EN	
MS27034H16T24CN	.066 (1.68)	MS27034H16T24EN	.065 (1.65)
MS27034H18T8CN	.090 (2.29)	MS27034H18T8EN	.090 (2.29)
MS27034H18T14CN	.087 (2.21)	MS27034H18T14EN	086 (2.18)
MS27034H18T31CN	.085 (2.16)	MS27034H18T31EN	.082 (2.08)
MS27034H20T16CN		MS27034H20T16EN	
MS27034H20T25CN		MS27034H20T25EN	
MS27034H20T28CN		MS27034H20T28EN	
MS27034H20T39CN		MS27034H20T39EN	
MS27034H20T41CN		MS27034H20T41EN	
MS27034H22T12CN		MS27034H22T12EN	
MS27034H22T19CN	.117 (2.97)	MS27034H22T19EN	115 (2.92)
MS27034H22T32CN		MS27034H22T32EN	
MS27034H22T55CN	.118 (3.00)	MS27034H22T55EN	115 (2.92)
MS27034H24T43CN		MS27034H24T43EN	
MS27034H24T57CN		MS27034H24T57EN	
MS27034H24T61CN		MS27034H24T61EN	

(11) denotes change

PREPARING ACTIVITY Air Force - 85
CUSTODIANS ARMY NAVY
AIR FORCE 85 DLA ES
REVIEW Air Force - 11, 17, 99
USER
PROJECT NUMBER 5935-F361-07

MILITARY SPECIFICATION SHEET
TITLE
CONNECTOR, RECEPTACLE, ELECTRICAL, PIN INSERT, CYLINDRICAL, MINIATURE, HERMETIC, SOLDER MOUNT

SPECIFICATION SHEET NUMBER
MS27034H(USAF)
SUPERSEDING
MS27034G 14 Nov 77
AMSC N/A FSC 5935

DISTRIBUTION STATEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:14Z
Check the source to verify that this is the current version before use.