INCH-POUND

MS27479G
w/AMENDMENT 1
10 September 2024
SUPERSEDING
MS27479G
27 June 2012

DETAIL SPECIFICATION SHEET

# CONNECTOR, RECEPTACLE, ELECTRICAL, WALL MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES II

Inactive for new design after 27 June 2012.
For new design, use MS27472.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.

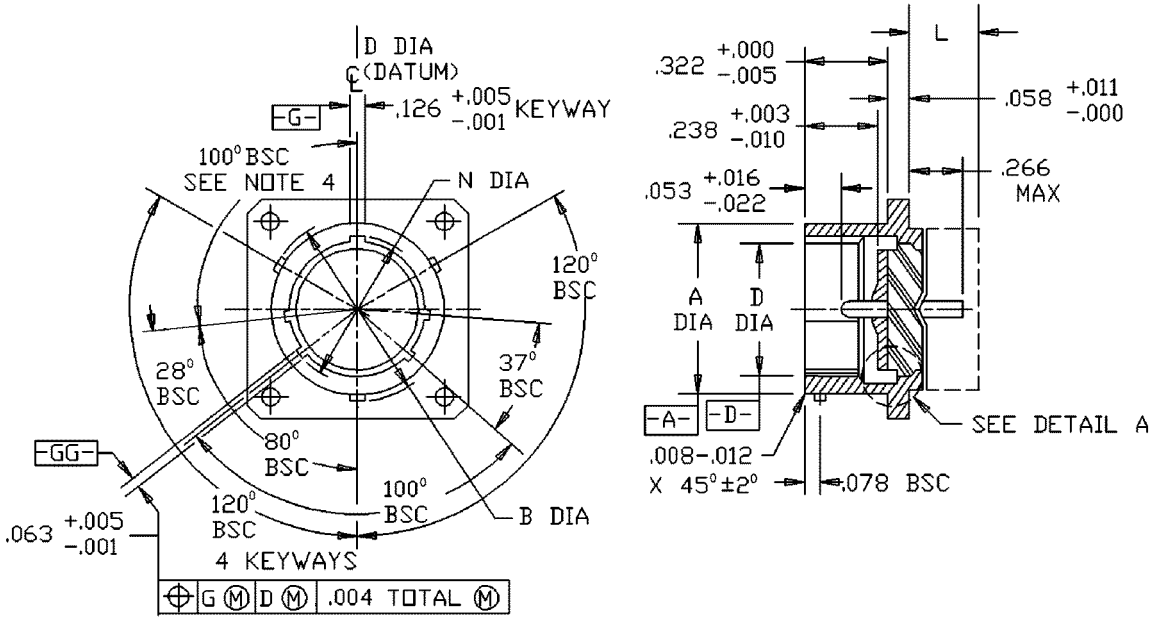



FIGURE 1. Receptacle, classes E and T.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

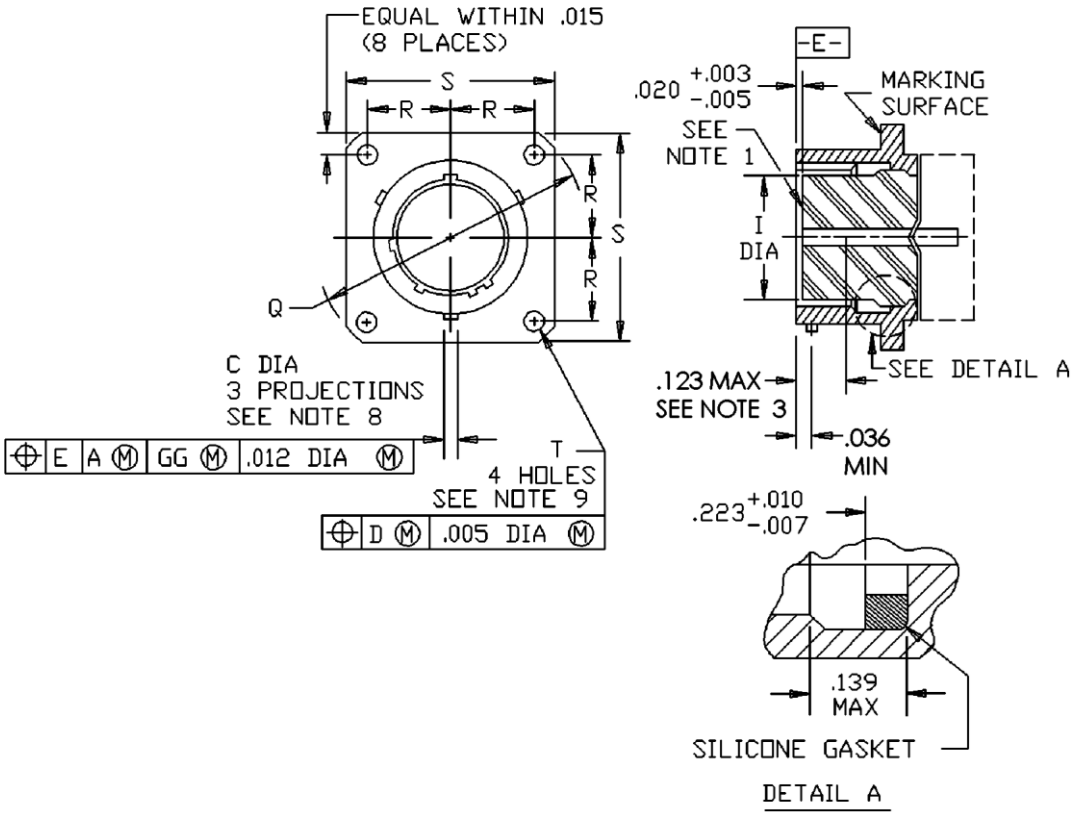



FIGURE 1. Receptacle, classes E and T – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.


| Shell size | A dia +.001 -.005 | B dia +.000 -.016 over projection | C dia +.006 -.002 | D dia +.005 -.001 | I dia ±.005 | N dia +.005 -.006 |
|---|---|---|---|---|---|---|
| 8 | .473 | .563 | .078 | .362 | .285 | .412 |
| 10 | .590 | .680 | | .490 | .413 | .540 |
| 12 | .750 | .859 | | .607 | .527 | .689 |
| 14 | .875 | .984 | | .732 | .652 | .814 |
| 16 | 1.000 | 1.103 | | .857 | .777 | .939 |
| 18 | 1.125 | 1.233 | | .962 | .866 | 1.039 |
| 20 | 1.250 | 1.358 | .125 | 1.087 | .991 | 1.164 |
| 22 | 1.375 | 1.483 | | 1.212 | 1.116 | 1.289 |
| 24 | 1.500 | 1.610 | | 1.337 | 1.241 | 1.414 |

| Shell size | Q max | R BSC | S max | T +.010 -.005 | CC | For insert arrangement, see MS drawing |
|---|---|---|---|---|---|---|
| 8 | 1.078 | .297 | .828 | .120 | .004 | 27343, 27516 |
| 10 | 1.266 | .3595 | .954 | | .010 | 27344, 27517 |
| 12 | 1.391 | .406 | 1.047 | | | 27345, 27518 |
| 14 | 1.516 | .453 | 1.141 | | | 27346, 27519 |
| 16 | 1.641 | .4845 | 1.234 | | | 27347, 27520 |
| 18 | 1.766 | .531 | 1.328 | | | 27348, 27521 |
| 20 | 1.891 | .578 | 1.453 | | | 27349, 27522 |
| 22 | 2.016 | .625 | 1.578 | | | 27350, 27523 |
| 24 | 2.204 | .6875 | 1.703 | .147 | | 27351, 27524 |

FIGURE 1. Receptacle, classes E and T – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

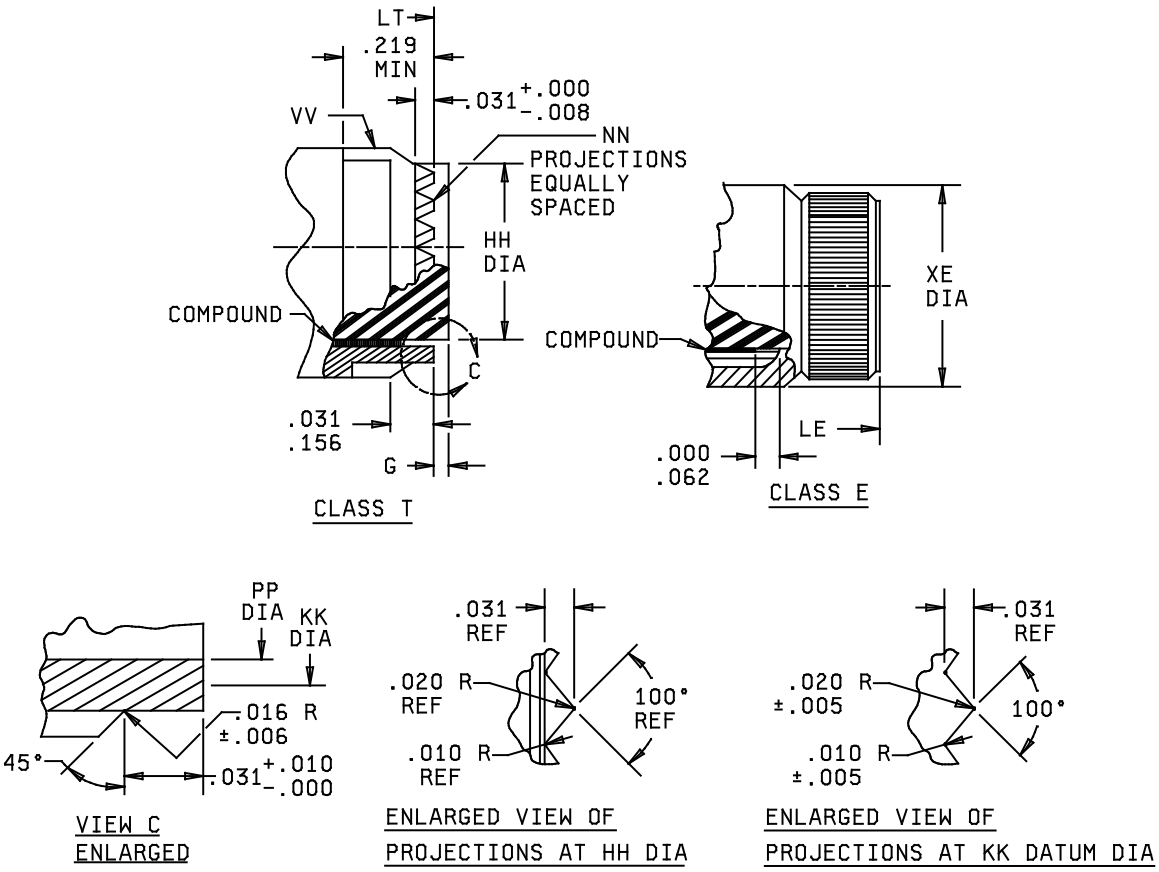


NOTES:

1. Insert front surface shall be flat within .005 T.I.R.
2. Dimensions are in inches.
3. The point at which a gage pin, having the same basic diameter as the mating contact and a square face, touches socket contact spring.
4. Normal keyway position. For other keyway positions see MIL-DTL-38999.
5. Diameters A and D shall be concentric within .015 T.I.R.
6. Diameter A with respect to diameter B, and diameter D with respect to diameter N, shall be concentric at MMC.
7. Diameters D and I shall be concentric within .015 T.I.R at MMC.
8. The gauge features for GG shall be CC smaller than their MMC size at basic location.
9. The gauge features for GG shall be .010 smaller than their MMC size at basic location.

FIGURE 1. Receptacle, classes E and T – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

| Shell size | G insert projection (class T only) | HH dia +.000 -.005 | KK dia (datum) | NN | PP dia ± .003 |
|---|---|---|---|---|---|
| 8 | .120 ± .030 | .387 | .366 | 12 | .344 |
| 10 | | .515 | .487 | 16 | .472 |
| 12 | | .628 | .609 | 20 | .586 |
| 14 | | .754 | .731 | 24 | .711 |
| 16 | | .879 | .853 | 28 | .836 |
| 18 | | .985 | .974 | 32 | .942 |
| 20 | | 1.110 | 1.097 | 36 | 1.067 |
| 22 | | 1.235 | 1.218 | 40 | 1.192 |
| 24 | .0900 ± .050 | 1.360 | 1.340 | 44 | 1.317 |

| Shell size | LE max overall length | LT max overall length | XE max dia | VV Thread UNEF-2A MOD (plated) | |
|---|---|---|---|---|---|
| | | | | Size | Major dia MOD |
| 8 | .562 | .391 | .594 | 7/16 – 28 | .421 – .417 |
| 10 | | | .719 | 9/16 – 24 | .542 – .538 |
| 12 | | | .844 | 11/16 – 24 | .667 – .663 |
| 14 | | | .969 | 13/16 – 20 | .791 – .787 |
| 16 | | | 1.094 | 15/16 – 20 | .916 – .912 |
| 18 | | | 1.219 | 1 1/16 – 18 | 1.034 – 1.030 |
| 20 | | | 1.344 | 1 3/16 – 18 | 1.158 – 1.154 |
| 22 | | | 1.469 | 1 5/16 – 18 | 1.283 – 1.279 |
| 24 | | .469 | 1.594 | 1 7/16 – 18 | 1.408 – 1.404 |

FIGURE 1. Receptacle, classes E and T – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999.
This receptacle mates with MS27473, MS27480, MS27484 and MS27500.
Insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:




No letter is required for normal.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-STD-1560
MS27472
MS27473
MS27480
MS27484
MS27500



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

(Project 5935-2024-165)

Review activities:
Army – AR, MI
Navy – EC, MC, OS
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:41Z
Check the source to verify that this is the current version before use.