

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

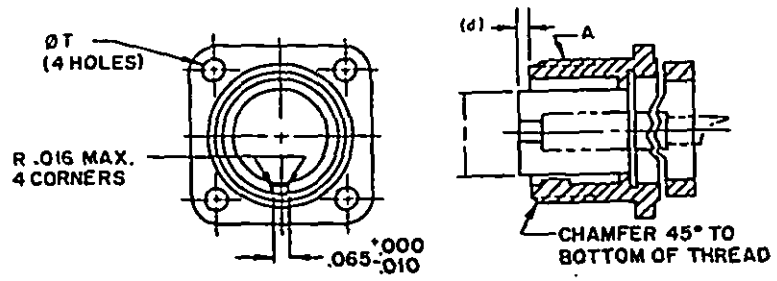

STYLE S (SOCKET INSERT)

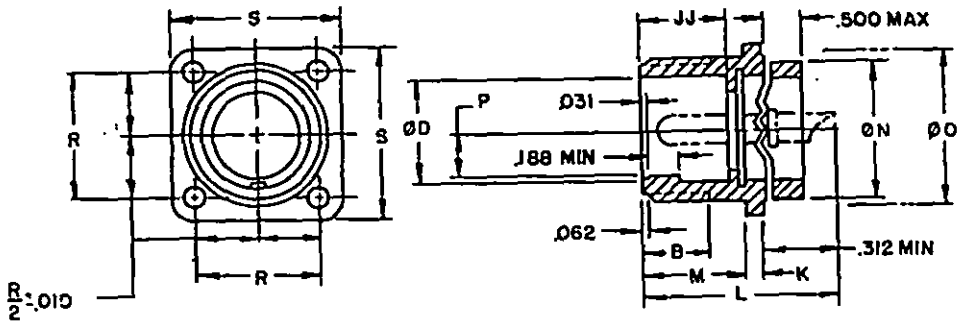

CLASS A - SOLID SHELL
CLASS C - PRESSURIZED

STYLE P (PIN INSERT)

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	D +.015 -.000 Ø INSIDE	ØI MAX INSERT	(c) JJ +.031 -.000 INSERT LOCATION	K THICKNESS MOUNTING FLANGE MAX	K THICKNESS MOUNTING FLANGE MIN	L MAX OVERALL LENGTH	M +.031/.000 MOUNTING FLANGE LOCATION	(b) N +.000 -.188 Ø OUTSIDE	ØO (ref) MOUNTING HOLE	P +.015 -.000 KEY HEIGHT	R +.005 CL - CL MOUNTING HOLE	S +.031 LENGTH SIDE	ØT +.010/.005 MOUNTING BOLT HOLE	FOR INSERT ARRANGEMENT SEE DRAWING
8S	1/2-28	.375	.370	.250	.562	.156	.062	1.191	.562	.532	.562	.130	.594	.875	.120	MIL-STD-1651
10S	5/8-24		.448	.320						.656	.688	.165	.719	1.000		
10SL																
12S	3/4-20		.557	.448						.782	.812	.224	.812	1.094		
12		.625			.750			1.713	.750							
14S	7/8-20	.375	.682	.525	.562			1.191	.562	.906	.938	.263	.906	1.188		
14		.625			.750			1.713	.750							
16S	1 -20	.375	.807	.650	.562			1.191	.562	1.032	1.062	.325	.969	1.281		
16		.625			.750			1.750	.750							
18	1-1/8-18		.932	.770		.203	.094	1.938		1.156	1.188	.385	1.062	1.375		
20	1-1/4-18		1.058	.925						1.282	1.312	.463	1.156	1.500		
22	1-3/8-18		1.182	1.020						1.406	1.438	.510	1.250	1.625		
24	1-1/2-18		1.307	1.145					.812	1.532	1.562	.573	1.375	1.750	.147	
28	1-3/4-18		1.526	1.365						1.782	1.812	.683	1.562	2.000		
32	2 -18		1.776	1.615		.359	.125	2.188	.875	2.032	2.062	.808	1.750	2.250	.173	
36	2-1/4-16		1.995	1.830						2.282	2.312	.915	1.938	2.500		
40	2-1/2-16		2.245	2.045						2.532	2.562	1.023	2.188	2.750		
44	2-3/4-16		2.495	2.300						2.782	2.812	1.150	2.375	3.000		
48	3 -16		2.745	2.550						3.032	3.062	1.275	2.625	3.250		

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85 NASA-NA
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3889

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, RECEPTACLE, ELECTRIC, BOX MOUNTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER MS3102 REV E — 20 AUG 92

SUPERSEDING MS3102 D — 31 AUG 90

AMSC- N/A — FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

Form approved
OMB No. 0704-0188

NOTES:

Ⓔ (a) SIZES 8S THROUGH 40 OF CLASSES A AND C ARE CANCELLED AFTER 1 JAN 1991. FOR REPLACEMENT PURPOSES USE MS3102R. MANUFACTURERS MAY CONTINUE TO SUPPLY THESE SIZES OF CLASSES A AND C UNTIL 1 JAN 1992 OR EXHAUST THEIR INVENTORIES, WHICHEVER COMES FIRST. FOR NEW DESIGN USE MS3452W. FOR SHIPBOARD JACKETED APPLICATIONS USE MS3402.
(b) SIZES 44 AND 48 OF CLASSES A AND C ARE INACTIVE FOR NEW DESIGN.
(c) WHERE RESILIENT INSERTS ARE USED, JJ MAY BE .109 LESS THAN THAT INDICATED.
(d) SOCKET INSERT OF HARD MATERIAL SHALL EXTEND .016 BEYOND OR .032 MAXIMUM BELOW SHELL. SOCKET INSERT OF RESILIENT MATERIAL SHALL EXTEND .047 +.000-.047 BEYOND SHELL AS SHOWN.
(e) FOR SHELL SIZES 36 AND 40, N TOLERANCE +.000, -.250
(f) CONNECTORS MS3102A (OR C) REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3102A (OR C) CONNECTORS.

EXAMPLE OF PART NUMBER:



DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

CERTAIN PROVISIONS OF THIS SPECIFICATION SHEET ARE THE SUBJECT OF INTERNATIONAL AGREEMENT NEPR 28 WHEN AMENDMENT, REVISION OR CANCELLATION OF THIS SPECIFICATION SHEET IS PROPOSED WHICH WILL MODIFY THE INTERNATIONAL STANDARDIZATION AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES TO CHANGE THE AGREEMENT OR MAKE OTHER APPROPRIATE ACCOMODATIONS.

Ⓔ DENOTES CHANGE

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 NASA-NA REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3689	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, RECEPTACLE, ELECTRIC, BOX MOUNTING, SOLDER CONTACTS, AN TYPE	SPECIFICATION SHEET NUMBER MS3102 20 AUG 92 REV E SUPERSEDING MS3102 D 31 AUG 90 AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

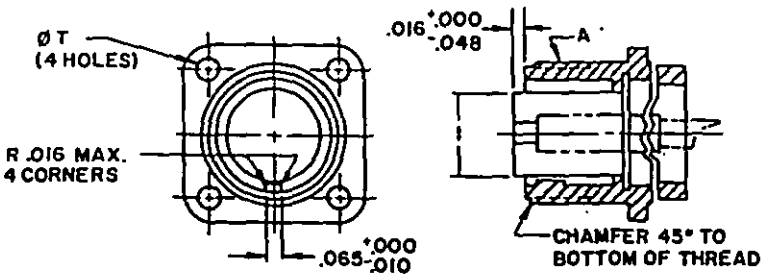

STYLE S (SOCKET INSERT)

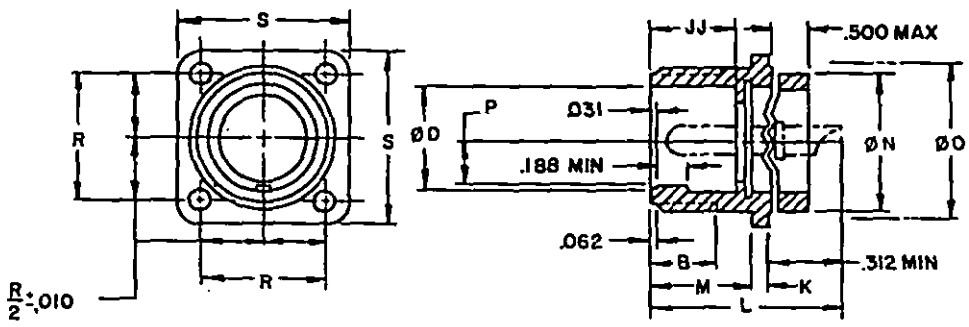

STYLE P (PIN INSERT)

CLASS K - FIREWALL

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	D +.015 -.000 Ø BASIC	ØT MAX INSERT	JJ +.031 -.000 INSERT LOCATION	K MIN THICKNESS MOUNTING FLANGE	L MAX OVERALL LENGTH	M +.031/-.000 MOUNTING FLANGE LOCATION	(4) E +.000 -.188 Ø OUTSIDE	ØO (ref) MOUNTING HOLE	P +.015 -.000 KEY HEIGHT	R +.005 CL-CL MOUNTING HOLES	S +.031 LENGTH SIDE	ØT +.010/ -.005 MOUNTING BOLT HOLE	PIN INSERT ARRANGEMENT SEE
8S	5/7-28	.375	.378	.250	.562	.062	1.375	.562	.532	.562	.130	.594	.875	.150	MIL-STD-1651
10S	5/8-24		.448	.320			1.438		.656	.688	.165	.719	1.000		
10SA									.782	.812	.224	.812	1.094		
12	3/4-20	.625	.557	.448	.750		1.812	.750							
14S	7/8-20	.375	.682	.525	.562		1.438	.562	.906	.938	.263	.906	1.188		
14		.625			.750		1.938	.750							
16S	1 -20	.375	.807	.650	.562		1.438	.562	1.032	1.062	.325	.969	1.281		
16							2.062	.750							
18	1-1/8-18	.625	.932	.770	.750	.078	2.250	.812	1.156	1.188	.385	1.062	1.375	.177	
20	1-1/4-18		1.058	.975					1.282	1.312	.443	1.156	1.500		
22	1-3/8-18		1.182	1.020					1.406	1.438	.498	1.250	1.625		
24	1-1/2-18		1.307	1.145					1.532	1.562	.573	1.375	1.750		
28	1-3/4-18		1.525	1.365					1.782	1.812	.683	1.562	2.000		
32	2 -18		1.776	1.615		.125		.875	2.032	2.062	.808	1.750	2.250	.209	
36	2-1/4-16		1.995	1.830					2.282	2.312	.915	1.938	2.500		
40	2-1/2-16		2.245	2.045					2.532	2.562	1.023	2.188	2.750		

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 NASA-NA REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3869	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, RECEPTACLE, ELECTRIC, BOX MOUNTING, SOLDER CONTACTS, AN TYPE	SPECIFICATION SHEET NUMBER MS3102 20 AUG 92 REV E SUPERSEDING MS3102 D 31 AUG 90 AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

Form approved
OMB No. 0704-0188

NOTES:

Ⓔ (a) CLASS K IS INACTIVE FOR NEW DESIGN AFTER 1 JAN 1991. FOR NEW DESIGN USE MS3452K. FOR SHIPBOARD JACKETED CABLE USE MS3402.
(b) CONNECTORS MS3102K REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3102K CONNECTORS.

EXAMPLE OF PART NUMBER:



DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓔ DENOTES CHANGE

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 NASA-NA REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3889	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, RECEPTACLE, ELECTRIC, BOX MOUNTING, SOLDER CONTACTS, AN TYPE	SPECIFICATION SHEET NUMBER MS3102 20 AUG 92 REV E SUPERSEDING MS3102 D 31 AUG 90 AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.


DD FORM 672 MAY 1988 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

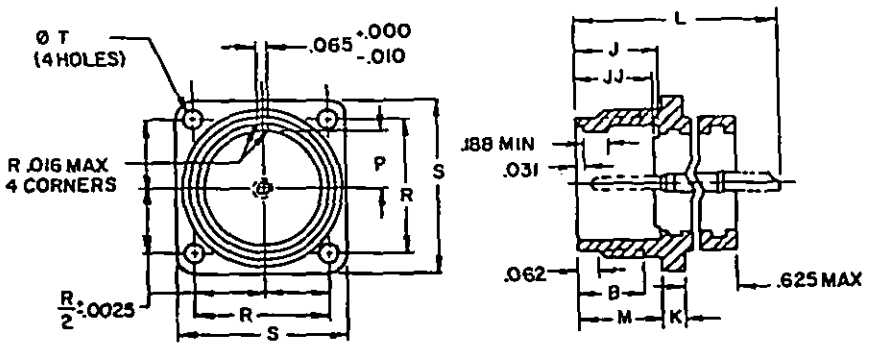

STYLE P (PIN INSERT)

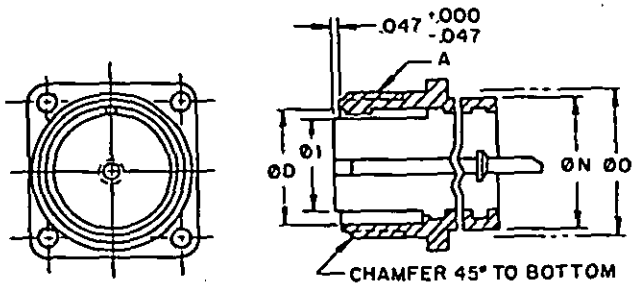

STYLE S (SOCKET INSERT)

CLASS E - ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	D +.015 -.000 Ø INSIDE	Ø1 MAX INSERT	J +.031 -.000 INT SHELL SHLDR	JJ ±.031 INSERT LOCATION	K THICKNESS MOUNTING FLANGE MAX	K THICKNESS MOUNTING FLANGE MIN	L MAX OVERALL LENGTH	M ±.031/-.000 MOUNTING FLANGE LOCATION	(a) R +.000 -.188 Ø OUTSIDE	ØO (ref) MOUNTING HOLE	P ±.015 -.000 KEY HEIGHT	R ±.005 CL-CL MOUNTING HOLE	S ±.031 LENGTH SIDE	ØT +.010/ -.005 MOUNTING BOLT HOLE	FOR INSERT ARRANGEMENT SEE
8S	1/2-28	.375	.370	.250	.562	.484	.156	.078	1.188	.562	.532	.562	.130	.594	.875	.120	MIL-STD-1651
10S	5/8-24		.448	.320							.656	.688	.165	.719	1.000		
10SL																	
12S	3/4-20		.557	.448							.782	.812	.224	.812	1.094		
12		.625			.750	.672			1.625	.750							
14S	7/8-20	.375	.682	.525	.562	.484			1.188	.562	.906	.938	.263	.906	1.188		
14		.625			.750	.672			1.625	.750							
16S	1 -20	.375	.807	.650	.562	.484			1.188	.562	1.032	1.062	.325	.969	1.281		
16									1.625	.750							
18	1-1/8-18	.625	.932	.770	.750	.672	.203	.094	1.938	.812	1.156	1.188	.385	1.062	1.375		
20	1-1/4-18		1.058	.925							1.282	1.312	.463	1.156	1.500		
22	1-3/8-18		1.182	1.020							1.406	1.438	.510	1.250	1.625		
24	1-1/2-18		1.307	1.145							1.532	1.562	.573	1.375	1.750	.147	
28	1-3/4-18		1.526	1.365							1.782	1.812	.683	1.562	2.000		
32	2 -18		1.776	1.615			.359	.125		.875	2.032	2.062	.808	1.750	2.250	.173	
36	2-1/4-16		1.995	1.830							2.282	2.312	.915	1.938	2.500		
40	2-1/2-16		2.245	2.047							2.532	2.562	1.023	2.188	2.750		

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85 NASA-NA
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3889

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, RECEPTACLE, ELECTRIC, BOX MOUNTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER MS3102 20 AUG 92 REV E

SUPERSEDING MS3102 D 31 AUG 90

AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

NOTES:

Ⓔ (a) CLASS E IS CANCELLED AFTER 1 JAN 1991. FOR REPLACEMENT PURPOSES USE MS3102R. MANUFACTURERS MAY CONTINUE TO SUPPLY CLASS E UNTIL 1 JAN 1992 OR EXHAUST THEIR INVENTORIES, WHICHEVER COMES FIRST. FOR NEW DESIGN USE MS3452W. FOR SHIPBOARD JACKETED CABLES USE MS3402.
(b) FOR SHELL SIZE 36 AND 40, N TOLERANCE IS +.000, -.250
(c) CONNECTORS MS3102E REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3102E CONNECTORS.

PART NUMBER EXAMPLE:



DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓔ DENOTES CHANGE

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 NASA-NA REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5936-3889	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, RECEPTACLE, ELECTRIC, BOX MOUNTING, SOLDER CONTACTS, AN TYPE	SPECIFICATION SHEET NUMBER MS3102 20 AUG 92 REV E SUPERSEDING MS3102 0 31 AUG 90 AMSC- N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 6 of 7


DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

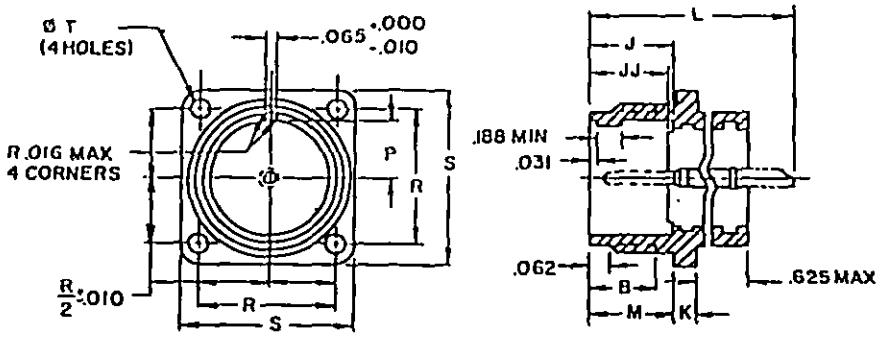

STYLE P (PIN INSERT)

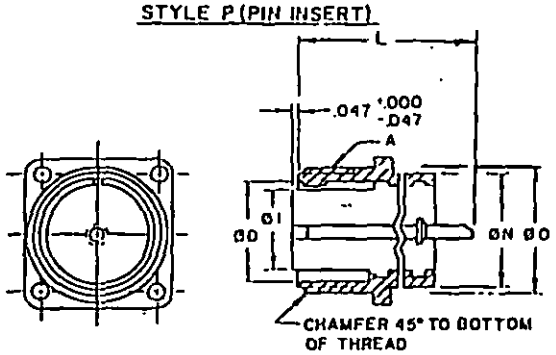

STYLE S (SOCKET INSERT)

CLASS R - ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	C +.015 -.000 Ø INSIDE	Ø I MAX INSERT	J +.031 -.000 INT SHELL SHLDR	JJ +.031 INSERT LOCATION	E THICKNESS MOUNTING FLANGE MAX	E MIN	L MAX OVERALL LENGTH	N +.031/-.000 MOUNTING FLANGE LOCATION	Ø H +.000 -.188 Ø OUTSIDE	Ø O (REF) MOUNTING HOLE	P +.015 -.000 KEY HEIGHT	R +.005 -.000 CL-CL MOUNTING HOLE	S +.031 LENGTH SIDE	Ø T +.010/ -.005 MOUNTING HOLE HOLE	FOR INSERT ARRANGEMENT SEE
05	1/2-28		.378	.750							.532	.562	.138	.594	.875		
9S	5/8-24	.375	.448	.870	.562	.484			1.219	.562	.656	.688	.165	.719	1.000		
10SL																	
12S	3/4-20	.625	.557	.448	.750	.672	.356	.678	1.625	.750	.782	.812	.224	.812	1.094		
14S	7/8-20	.375	.682	.525	.562	.484			1.219	.562	.906	.938	.263	.906	1.188	.120	MIL-STD-1651
14		.625			.750	.672			1.625	.750							
16S	1 -20	.375	.807	.650	.562	.484			1.219	.562	1.032	1.062	.325	.969	1.281		
16									1.625								
18	1-1/8-18		.932	.770						.750	1.156	1.188	.385	1.062	1.375		
20	1-1/4-18		1.056	.925							1.282	1.312	.463	1.156	1.500		
22	1-3/8-18		1.182	1.020			.703	.844			1.406	1.438	.510	1.250	1.625		
24	1-1/2-18	.625	1.307	1.145	.750	.672			1.938	.812	1.532	1.562	.573	1.375	1.750	.147	
28	1-3/4-16		1.526	1.365							1.782	1.812	.663	1.562	2.000		
32	2 -16		1.776	1.615							2.032	2.062	.808	1.750	2.250		
36	2-1/4-16		1.995	1.830			.359	.125		.875	2.282	2.312	.915	1.938	2.500	.173	
40	2-1/2-16		2.245	2.083							2.532	2.562	1.023	2.188	2.750		

(E) NOTES:
(a) CLASS R IS INACTIVE FOR NEW DESIGN AFTER 1 JAN 1991. FOR NEW DESIGN USE MS3452W. FOR SHIPBOARD JACKETED CABLES USE MS3402.
(b) FOR SHELL SIZE 36 AND 40 N TOLERANCE IS .000 -.250.
(c) CONNECTORS MS3102R REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING MS3102E AND AN3102E CONNECTORS.

PART NUMBER EXAMPLE:

MS3102R10-5SY

MS SHELL DRAWING NO.	CLASS	SIZE	INSERT ARRANGEMENT NUMBER	STYLE (P OR S)	ALTERNATE INSERT POSITION (W, X, Y, OR Z). LEAVE BLANK FOR NORMAL POSITION

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85 NASA-NA
REVIEW: ARMY-MI, 84 ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3889

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, RECEPTACLE, ELECTRIC, BOX MOUNTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER MS3102 20 AUG 92 . REV E

SUPERSEDING MS3102 D 31 AUG 90

AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988

Source: https://assist.dla.mil -- Downloaded: 20240-23112.582
Check the source to verify that this is the current version before use.