
FED. SUP CLASS
6140

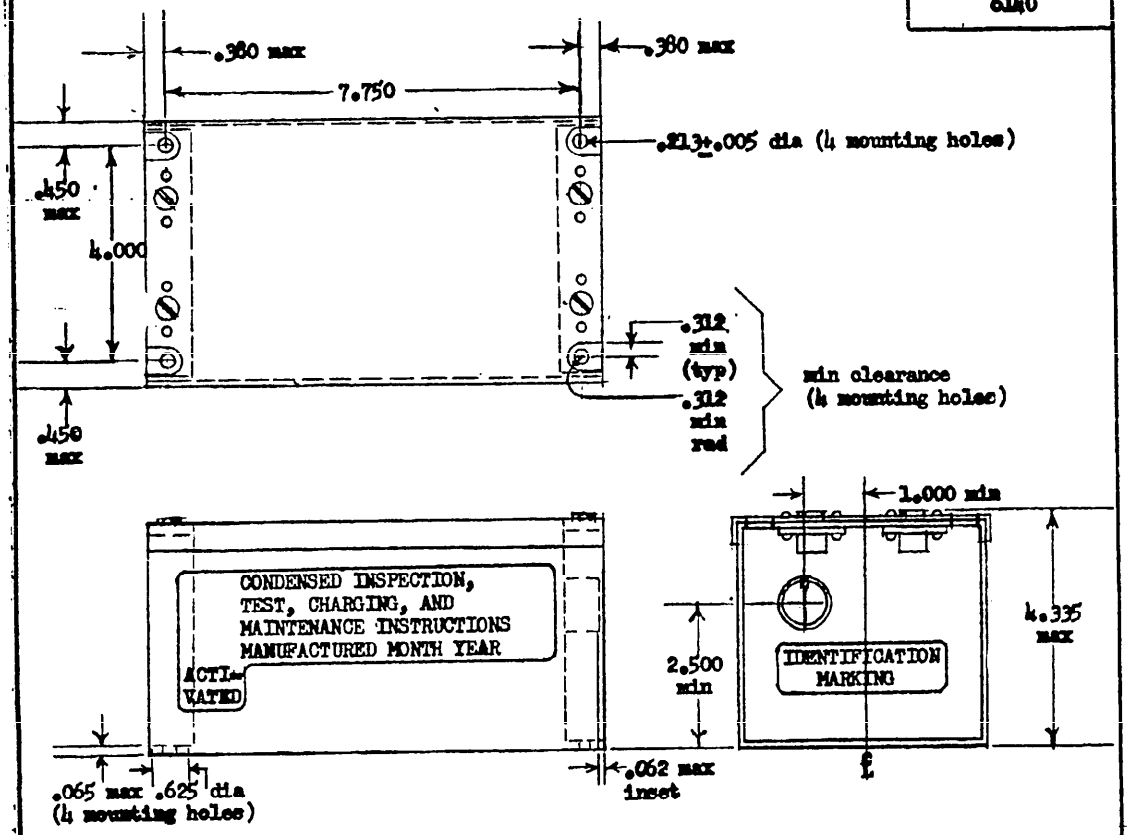

Notes. -

1. Dimensions. - The dimensions of each battery shall be as shown above. All dimensions are in inches. All tolerances are ±.010 unless otherwise specified.

2. MS Part Number. - The MS part number of each battery shall be MS 3346-1.

3. Cover Latches. - Each battery may include latches conforming to MIL-F-5591 to clamp the cover to the body of the case. The size, number, and location of the latches are optional except that the latches shall be on the top surface of the battery.

4. Electric Connections. - Each battery shall include as its electric connections a receptacle which shall be usable with an MS3108-18-9P plug and which shall be installed on the battery in the location and orientation shown above.

5. Electric Circuit. - The cells shall be connected to Sockets D and A of the receptacle, with Socket D negative and Socket A positive. The battery may also include one or more heaters and one or more thermal switches, which, if included, shall be connected to sockets C and E. Sockets B and G may be used for testing the heater circuit. Socket F may be connected internally to the frame and/or case of the battery. There shall not be any connection inside the battery between the cells and the heater circuit. When heater power is specified, 111±11 volts at 400±20 Hz shall be applied between Sockets C and E.

The battery shall not draw more than 1.5 amperes from this source of potential at any time, and shall not draw any current when the temperature of the battery is 55 F or greater. Heater power shall not be furnished unless specified.

6. Nominal Capacity. - The nominal capacity of each battery shall be 2½ ampere-hours.

APPROVED 1 Apr 68 REVISED (A) 25 Oct 68

This standard has been approved by the Naval Air Systems Command, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust	TITLE BATTERY, STORAGE, AIRCRAFT, HEAVY DUTY, 2½ AMPERE-HOUR, 24-VOLT, HEATED	MILITARY STANDARD MS3346(AS)
Procurement Specification MIL-B-8565	SUPERSEDES:	SHEET 1 OF 3.

DD FORM 1 SEP 67 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:02Z
Check the source to verify that this is the current version before use.

7. Weight - The weight of each battery filled with electrolyte shall not exceed 10 pounds in any state of charge.

8. Specification - The batteries shall conform to requirements of MIL-B-8565 for maintainable, limited attitude, plate-mounted, heavy duty high discharge rate batteries modified as follows: (A)

General:

A. Replace "design standard", wherever it occurs, with "procurement standard".

B. Requirements for receptacle-connected batteries are not applicable to this battery.

4.6.1 Mounting - Add: "Sockets C, D, and F shall be connected to the plate externally."

4.6.10 "Evaluation of Equipment" Test - Replace "a 45-minute discharge" with "the test of 4.7.25.1".

4.6.13 Heater Circuit - Add: The battery shall be tested during all tests for which temperatures greater than 55 F are specified, except 4.7.23, to determine that there is an open circuit internally between sockets C and E of the electric receptacle of the battery at all times.

4.7.2 Dielectric Strength - Replace "the battery", in the fourth and sixth lines, with "the cells".

4.7.21 Altitude - Replace the text with: "The battery shall be subjected to the Altitude Test Procedure VI Condition C of MIL-E-5272. Heater power shall be furnished during the last 30±1 minutes of the 1-hour temperature stabilization period and during the discharge test. The battery shall be tested to determine that it does not draw more than 1.5 amperes from the source of heater power at any time."

4.7.22 Mechanical Shock - The shocks with the battery in the attitude in which it is shown on sheet 1 shall be performed last, and the battery shall be subjected to the test of 4.7.25.1 simultaneously with these shocks, with the shocks occurring during the discharges.

4.7.25 Special Tests - Add:

4.7.25.1 20-Millisecond Discharges - The battery shall be subjected to three 20-millisecond discharges with a current of 40 amperes and a minimum potential of 13.5 volts, and a 5-minute rest period between each two consecutive discharges.

4.7.25.2 20-Millisecond Discharges at -65 F - The battery shall be subjected to the test of 4.7.25.1 at -65 F, with heater power furnished during the last 30±1 minutes of the 12-hours temperature stabilization period specified in 4.6.9 and during the discharge test. The battery shall be tested to determine that it does not draw more than 1.5 amperes from the source of heater power at any time.

4.7.31 Additional Qualification Tests - Add:

4.7.31.1 Heater Life - The battery shall be stored for 500±5 hours at -65±5 F with heater power furnished. During this period, the potential of the heater power shall be increased to 190±10 volts for 0.10±.01 second 20 times at approximately equal intervals. The current drawn from the source of heater power shall be monitored and if the heater cycles on and off, the increased potential shall be applied while the heater is drawing current. The battery shall be tested to determine that it does not draw more than 1.5 amperes from the source of heater power at any time except during the applications of increased potential. Also during this period, the battery shall be subjected to the test of 4.7.25.1 20 times, approximately equally spaced, and approximately midway between the applications of increased heater potential.

APPROVED 1 Apr 68 REVISED (A) 25 Oct 68

This standard has been approved by the Naval Air Systems Command, Department of the Navy, and is mandatory for use by this activity. All other military activities are required to employ this standard when suitable.

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:02Z
Check the source to verify that this is the current version before use.

4.7.31.2 Explosive Atmosphere. - The battery shall be placed in a chamber containing an explosive mixture of gasoline conforming to MIL-G-5572 for Grade 100-130 and air, with heater power furnished and a potential of 28.5±0.5 volts applied to the battery. The temperature of the chamber shall be reducted to --65±5 F at a rate of -35±5 F per hour. The temperature shall then be maintained at -65±5 F for 12.0±0.5 hours. The temperature shall then be increased to 70±10 F at a rate of 35±5 F per hour. The potential of 28.0± 0.5 volts shall then be removed and within 30 seconds a load of not more than 0.001 ohm shall be connected to the battery for 10±1 seconds.

4.7.31.3 Radio Frequency Interference. - The battery shall be subjected to the radio frequency interference tests of MIL-STD-461 for Class Number IIC.

APPROVED 1 Apr 68 REVISED (A) 25 Oct 68

(A) Revised to be compatible with MIL-B-8565F.

This standard has been approved by the Naval Air Systems Command, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy - AS Other Cust	TITLE BATTERY, STORAGE, AIRCRAFT, HEAVY DUTY, 2½ AMPERE-HOUR, 24-VOLT, HEATED	MILITARY STANDARD MS3346(AS)
Procurement Specification MIL-B-8565	SUPERSEDES:	SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:02Z
Check the source to verify that this is the current version before use.