

FED. SUP CLASS
5935

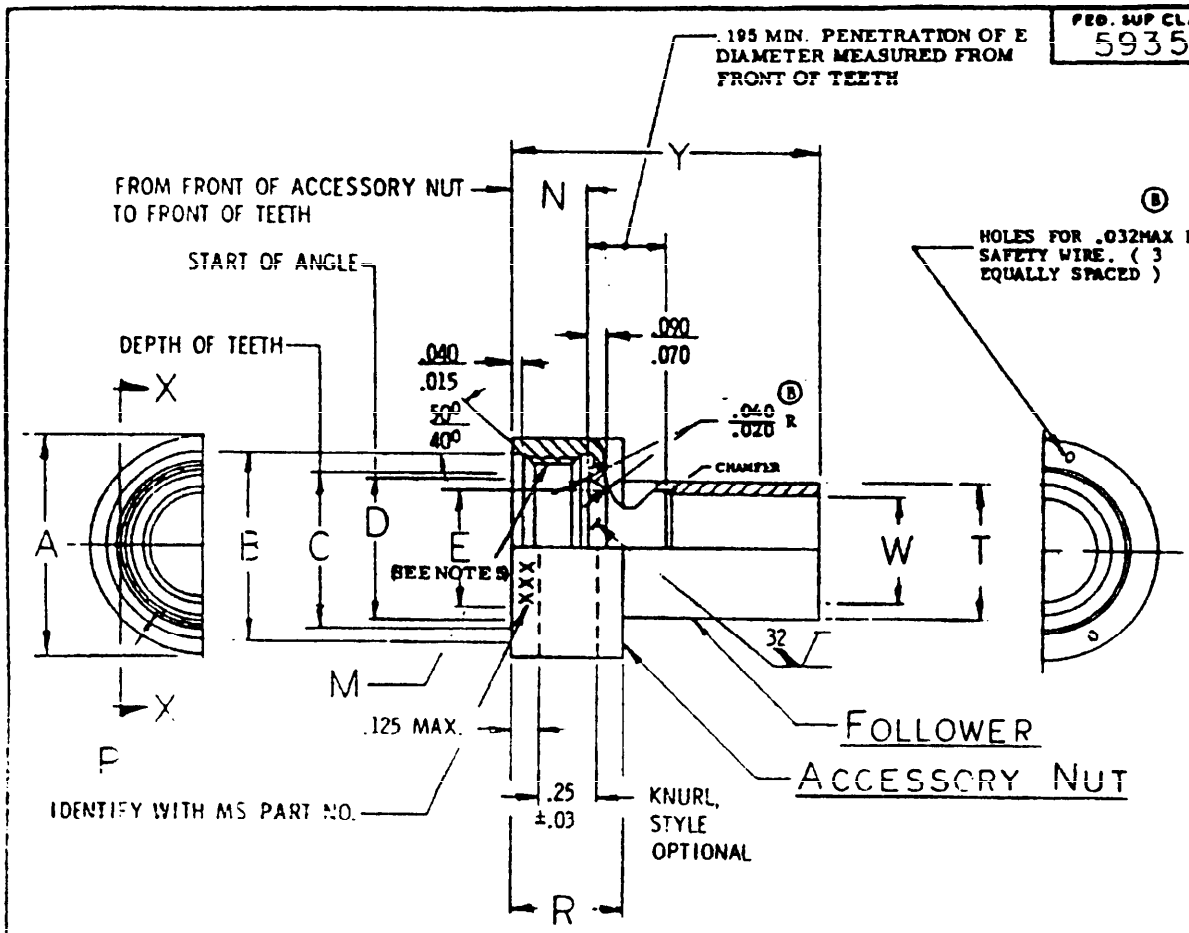


VIEW X-X
LESS ACCESSORY NUT

© INACTIVE FOR DESIGN AFTER 1 JULY 1982. DOCUMENT WILL BE CANCELLED AFTER 1 JULY 1984, USE MIL-C-85049/26.

REVIEWER SYMBOLS: NAVY EC

APPROVED 1 APR 71 REVISED (A) 18 OCT 71 (B) 5 APR 72 (C) 10 May 1982

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

© DENOTES CHANGES

| | | |
|---|---|---|
| P.A. NAVY - AS<br>Other Cust | TITLE<br>BACKSHELLS, SHIELD TERMINATION, FOR ELECTRIC CONNECTORS | MILITARY STANDARD<br>MS 3419 (NAVY) |
| PROCUREMENT SPECIFICATION<br>MIL-C-85049/26 (NAVY) | SUPERSEDES<br>MS3419-01 THRU -09 | SHEET 1 OF 2 |

DD FORM 672-1 (Electronic version)

PROJECT NO. 5935-3297-07

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5935

| DASH NUMBER | FOR CONNECTOR SHELL SIZE (REF) MIL-C-81703 SERIES 3 | MIL-C-0026482 (NAVY) SERIES 2 | MIL-C-005015 (NAVY) CRIMP | A +.000 -.045 DIA. | B +.025 -.000 DIA. | C +.000 -.015 DIA. | D +.015 -.000 DIA. | M R. H. THREAD CLASS 2B |
|---|---|---|---|---|---|---|---|---|
| -3 | 3 | | | .669 | .562 | .431 | .370 | .562 - 24UNEF |
| -8 | | 8 | 8S | .617 | .500 | .360 | .299 | .500 - 20UNF |
| -10 | | 10 | 10S.10SL | .734 | .625 | .494 | .433 | .625 - 24UNEF |
| -12 | 7 | 12 | 12S&12 | .858 | .750 | .610 | .549 | .750 - 20UNEF |
| -14 | 12 | 14 | 14S&14 | .984 | .875 | .735 | .674 | .875 - 20UNEF |
| -16 | 19 | 16 | 16S&16 | 1.112 | 1.000 | .860 | .799 | 1.000 - 20UNEF |
| -18 | 27 | 18 | 18 | 1.218 | 1.062 | .916 | .869 | 1.062 - 18UNEF |
| -20 | 37 | 20 | 20 | 1.345 | 1.188 | 1.041 | .994 | 1.188 - 18UNEF |
| -22 | | 22 | 22 | 1.468 | 1.312 | 1.166 | 1.119 | 1.312 - 18UNEF |
| -24 | | 24 | 24 | 1.593 | 1.438 | 1.291 | 1.244 | 1.438 - 18UNEF |
| -28 | | | 28 | 1.969 | 1.750 | 1.512 | 1.469 | 1.750 - 18UNS |
| -32 | | | 32 | 2.219 | 2.000 | 1.762 | 1.715 | 2.000 - 18UNS |
| -36 | | | 36 | 2.469 | 2.250 | 1.977 | 1.930 | 2.250 - 16UN |
| -40 | | | 40 | 2.719 | 2.500 | 2.192 | 2.145 | 2.500 - 16UN |
| -44 | | | 44 | 2.969 | 2.750 | 2.447 | 2.400 | 2.750 - 16UN |
| -48 | | | 48 | 3.219 | 3.000 | 2.697 | 2.650 | 3.000 - 16UN |
| -61 | 61 | | | 1.663 | 1.500 | 1.354 | 1.307 | 1.500 - 18UNEF |

| DASH NUMBER | N +.000 -.022 | P NUMBER OF TEETH | R +.000 -.002 | T ±.010 DIA. | W ±.015 DIA. | Y +.000 -.062 | MS3161 RING, SHIELD CRIMP (REF) |
|---|---|---|---|---|---|---|---|
| -3 | .305 | 15 | .540 | .337 | .250 | 1.277 | — |
| -8 | .305 | 12 | .540 | .337 | .250 | 1.277 | -8 |
| -10 | .305 | 15 | .540 | .488 | .325 | 1.277 | -10 |
| -12 | .305 | 21 | .540 | .500 | .420 | 1.277 | -12 |
| -14 | .305 | 24 | .540 | .620 | .540 | 1.277 | -14 |
| -16 | .305 | 30 | .540 | .750 | .670 | 1.277 | -16 |
| -18 | .305 | 33 | .540 | .880 | .789 | 1.277 | -18 |
| -20 | .305 | 36 | .540 | 1.000 | .914 | 1.277 | -20 |
| -22 | .305 | 39 | .540 | 1.120 | 1.039 | 1.277 | -22 |
| -24 | .305 | 42 | .540 | 1.192 | 1.112 | 1.277 | -24 |
| -28 | .467 | 54 | .702 | 1.545 | 1.389 | 1.439 | -28 |
| -32 | .467 | 63 | .702 | 1.795 | 1.635 | 1.439 | -32 |
| -36 | .467 | 72 | .702 | 2.045 | 1.850 | 1.439 | -36 |
| -40 | .467 | 81 | .702 | 2.295 | 2.065 | 1.439 | -40 |
| -44 | .467 | 87 | .702 | 2.545 | 2.320 | 1.439 | -44 |
| -48 | .467 | 96 | .702 | 2.795 | 2.570 | 1.439 | -48 |
| -61 | .305 | 45 | .540 | 1.359 | 1.210 | 1.277 | -61 |

EXAMPLE OF PART NUMBER: MS3419-22C

MS3419 - 22 C

BASIC PART NO. — DASH NO. — FINISH (SEE NOTE 4)

REVIEWER SYMBOLS: NAVY - EC

APPROVED 1 APR 71 REVISED © FOR CHANGES SEE SHEET 1

| P.A. NAVY – AS Other Cost | TITLE BACKSHELLS, SHIELD TERMINATION, FOR ELECTRIC CONNECTORS | MILITARY STANDARD MS3419 (NAVY) |
|---|---|---|
| PROCUREMENT SPECIFICATION MIL-C-005015 (NAVY) | SUPERSEDES MS3419-01 THRU -09 | SHEET 2 |

DD FORM 672-1 (Limited coordination)

PLATE NO. 17709

This standard has been approved by the Department of the NAVY and is mandatory for use by the activities. All other military activities are required to comply this standard when needed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES. TOLERANCES: .XX = ±.01; .XXX = ±.005, ANGULAR: X° = ±1° 00'; X XX' = ±0° 30'.
2. COMPLETE BACKSHELL CONSISTS OF AN ACCESSORY NUT AND FOLLOWER. THE ACCESSORY NUT SHALL BE CAPTIVATED TO, AND FREE TO ROTATE ON THE FOLLOWER.
3. MATERIAL: ALUMINUM ALLOY.
4. FINISH:
   C - CADMIUM PLATE, PER QQ-P-416, TYPE II, CLASS 3; COLOR - DULL OLIVE DRAB (ELECTRICALLY CONDUCTIVE).
   N - ELECTROLESS NICKEL, PER MIL-C-26074, CLASS 3 OR 4, GRADE B.
5. THIS REAR ACCESSORY SHALL CONFORM TO MS3155 (DESIGN STANDARD). MS3155 TAKES PRECEDENCE OVER THIS STANDARD.
6. QUALIFICATION: THREE TYPICAL SAMPLES OF EACH FINISH (ALL DIFFERENT DASH NUMBERS) SHALL BE TESTED FOR THE FOLLOWING:
   A. EXAMINATION OF PRODUCT.
   B. MAGNETIC PERMEABILITY -
      THE RELATIVE MAGNETIC PERMEABILITY SHALL BE LESS THAN 2.0 WHEN CHECKED WITH AN INDICATOR CONFORMING TO MIL-I-17214. WIRED ASSEMBLIES SHALL NOT BE CARRYING CURRENT.
   C. SHELL CONDUCTIVITY -
      MATED ASSEMBLIES SHALL BE ELECTRICALLY CONDUCTIVE FROM THE PLUG ACCESSORY TO THE RECEPTACLE FLANGE OR ACCESSORY ON A CABLE CONNECTING RECEPTACLE. THE OVERALL D.C. RESISTANCE SHALL NOT EXCEED 0.005 OHMS FOR FINISH N AND 0.05 OHMS FOR ALL OTHER FINISHES WHEN MEASURED BY THE VOLTMETER-AMMETER METHOD. THE APPLIED POTENTIAL SHALL BE 1-1/2 VOLTS D.C. MAXIMUM. A RESISTANCE SHALL BE INSERTED IN THE CIRCUIT TO LIMIT THE CURRENT TO 100 ± .010 AMPERES.
   D. CORROSION
      SALT SPRAY TEST IN ACCORDANCE WITH METHOD 1001 OF MIL-STD-1344, CONDITION B. THE SALT CONCENTRATION SHALL BE FIVE PERCENT.
   E. VIBRATION -
      IN ACCORDANCE WITH METHOD 2005 OF MIL-STD-1344, TEST CONDITION II AND TEST CONDITION III
   F. SHOCK
      APPROXIMATELY 1/2 SINE WAVE TRANSIENT SHOCK IMPULSES OF 50 GRAVITY UNITS, AND A DURATION OF 11 ± 1 MILLISECONDS. ONE SHOCK SHALL BE APPLIED IN EACH DIRECTION OF THE THREE MAJOR AXES OF THE ASSEMBLY.
   G. POST EXAMINATION OF PRODUCT.

   OTHER DASH NUMBERS WILL BE QUALIFIED BY SIMILARITY WITH SAMPLES FURNISHED TO THE QUALIFYING ACTIVITY.
7. QUALITY ASSURANCE:
   A. EXAMINATION OF PRODUCT.

REVIEWER SYMBOLS: NAVY - EC

APPROVED 1 APR 71 REVISED © FOR CHANGES SEE SHEET 1

| P A NAVY - AS<br>Other Cust | TITLE<br>BACKSHELLS, SHIELD TERMINATION, FOR ELECTRIC CONNECTORS | MILITARY STANDARD<br>MS 3419 (NAVY) |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>SEE [illegible] (NAVY) | SUPERSEDES<br>MS3419-01 THRU -09 | SHEET 3 |

DD FORM 672-1 (Revised and Obsolete)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.