
FED. SUP CLASS
5305

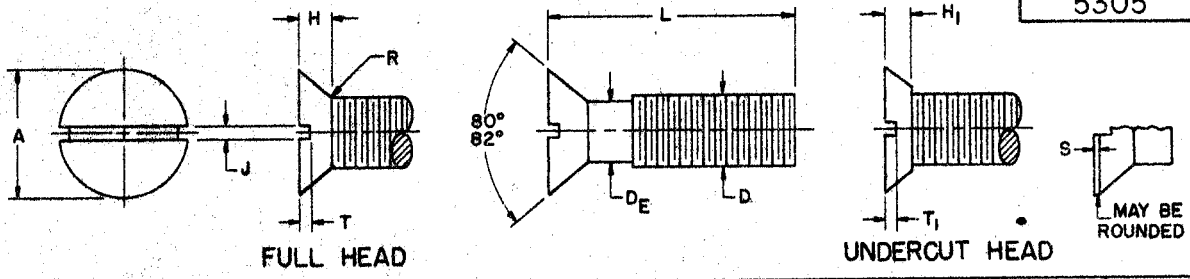

FULL HEAD — UNDERCUT HEAD

				#0 (.0600)	#1 (.0730)	#2 (.0860)	#4 (.1120)	#6 (.1380)	#8 (.1640)	#10 (.1900)	1/4 (.2500)
NOMINAL SIZE D											
THREADS PER INCH				80NF	72NF	64NF	48NF	40NF	36NF	32NF	28UNF
BODY DIAMETER	D_E	MAX		.0600	.0730	.0860	.1120	.1380	.1640	.1900	.2500
		MIN		.0496	.0615	.0733	.0954	.1184	.1424	.1658	.2225
HEAD DIAMETER	A	MAX SHARP		.119	.146	.172	.225	.279	.332	.385	.507
		MIN SHARP		.105	.130	.156	.207	.257	.308	.359	.477
		ABS MIN		.101	.126	.150	.200	.249	.300	.348	.462
SLOT WIDTH	J	MAX		.023	.026	.031	.039	.048	.054	.060	.075
		MIN		.016	.019	.023	.031	.039	.045	.050	.064
FLAT	S	MAX		.002	.003	.003	.004	.005	.006	.007	.009
RADIUS	R	MAX		.025	.027	.031	.041	.050	.055	.062	.071
FULL HEAD — HEAD HEIGHT	H	MAX		.035	.043	.051	.067	.083	.100	.116	.153
		MIN		.026	.033	.040	.055	.069	.084	.098	.131
FULL HEAD — SLOT DEPTH	T	MAX		.015	.019	.023	.030	.038	.045	.053	.070
		MIN		.010	.012	.015	.020	.024	.029	.034	.046
UNDERCUT HEAD — HEAD HEIGHT	H_1	MAX		.026	.032	.037	.048	.060	.071	.083	.108
		MIN		.017	.022	.026	.036	.046	.055	.065	.086
UNDERCUT HEAD — SLOT DEPTH	T_1	MAX		.012	.016	.019	.025	.032	.037	.044	.058
		MIN		.010	.012	.015	.020	.024	.029	.034	.046

THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.

MINIMUM COMPLETE THREAD LENGTH OF 1-3/4.

LENGTH L	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/8		1	6	13	22	33	48		
3/16		2	7	14	23	34	49	67	
1/4		3	8	15	24	35	50	68	85
5/16		4	9	16	25	36	51	69	86
3/8	+0 -1/32	5	10	17	26	37	52	70	87
7/16			11	18	27	38	53	71	88
1/2			12	19	28	39	54	72	89
5/8				20	29	40	55	73	90
3/4				21	30	41	56	74	91
7/8					31	42	57	75	92
1					32	43	58	76	93
1-1/4	+0 -1/16					44	59	77	94
1-1/2						45	60	78	95
1-3/4						46	61	79	96
2						47	62	80	97
2-1/4	+0 -3/32						63	81	98
2-1/2							64	82	99
2-3/4							65	83	100
3							66	84	101

Ⓐ CANCELLED SEE SHEET 2

MATERIAL: CARBON STEEL, SPECIFICATION QQ-W-409 OR QQ-S-633, EXCEPT BESSEMER COMPOSITIONS, 55,000 PSI MINIMUM ULTIMATE TENSILE STRENGTH.

FINISH: PHOSPHATE COATED, SPECIFICATION MIL-C-16232, TYPE II.

THREADS: THE THREADS SHALL BE IN ACCORDANCE WITH SCREW-THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H-28.

NOTES:
(1) REFERENCED DOCUMENTS OF ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.
(2) IN CASE OF CONFLICT WITH ANY REFERENCED DOCUMENT, THIS STANDARD WILL GOVERN.
(3) THE MS PART NUMBER CONSISTS OF THE MS SHEET NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS 35244-1.
(4) SIZES ABOVE DOTTED LINE HAVE UNDERCUT HEAD.
(5) ALL DIMENSIONS IN INCHES.

Ⓐ FOR CHANGES SEE SHEETS 1 AND 2.

APPROVED FEB 9, 1954 REVISED Ⓐ 5 APRIL 1962

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	ORD
Other Cust	SHIPS
PROCUREMENT SPECIFICATION	FF-S-92
SUPERSEDES:	

TITLE: SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, CARBON STEEL, PHOSPHATE COATED, NF-2A AND UNF-2A.

MILITARY STANDARD

MS 35244

SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:12
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

NOMINAL SIZE D			5/16 (.3125)	3/8 (.3750)	7/16 (.4375)	1/2 (.5000)	9/16 (.5625)	5/8 (.6250)	3/4 (.7500)
THREADS PER INCH			24UNF	24UNF	20UNF	20UNF	18 UNF	18UNF	16UNF
BODY DIAMETER D_E	MAX		.3125	.3750	.4375	.5000	.5625	.6250	.7500
	MIN		.2806	.3430	.3995	.4619	.5205	.5828	.7029
HEAD DIAMETER A	MAX SHARP		.635	.762	.812	.875	1.000	1.125	1.375
	MIN SHARP		.600	.722	.771	.831	.950	1.069	1.306
	ABS MIN		.581	.700	.743	.802	.919	1.035	1.267
SLOT WIDTH J	MAX		.084	.094	.094	.106	.118	.133	.149
	MIN		.072	.081	.081	.091	.102	.116	.131
FLAT S	MAX		.011	.013	.016	.018	.020	.023	.027
RADIUS R	MAX		.083	.083	.100	.100	.110	.110	.125
FULL HEAD — HEAD HEIGHT H	MAX		.191	.230	.223	.223	.260	.298	.372
	MIN		.165	.200	.190	.186	.220	.253	.319
FULL HEAD — SLOT DEPTH T	MAX		.088	.106	.103	.103	.120	.137	.171
	MIN		.058	.070	.066	.065	.077	.088	.111
UNDERCUT HEAD — HEAD HEIGHT H_1	MAX		.135	.162	.156	.160	.185	.212	.264
	MIN		.109	.132	.126	.123	.145	.167	.211
UNDERCUT HEAD — SLOT DEPTH T_1	MAX		.073	.088	.085	.085	.100	.114	.142
	MIN		.058	.070	.066	.065	.077	.088	.111

LENGTH L	TOLERANCE	5/16 (.3125)	3/8 (.3750)	7/16 (.4375)	1/2 (.5000)	9/16 (.5625)	5/8 (.6250)	3/4 (.7500)
THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.		DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/8, 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 7/8, 1	+0 -1/32	102, 103, 104, 105, 106, 107, 108	117, 118, 119, 120, 121	130, 131, 132, 133, 134	142, 143, 144, 145	Ⓐ CANCELLED SEE NOTE	163, 164, 165	173, 174
1-1/4, 1-1/2, 1-3/4, 2	+0 -1/16	109, 110, 111, 112	122, 123, 124, 125	135, 136, 137, 138	146, 147, 148, 149	156, 157, 158, 159	166, 167, 168, 169	175, 176, 177, 178
MINIMUM COMPLETE THREAD LENGTH OF 1-3/4: 2-1/4, 2-1/2, 2-3/4, 3	+0 -3/32	113, 114, 115, 116	126, 127, 128, 129	138, 139, 140, 141	149, 150, 151, 152	159, 160, 161, 162	169, 170, 171, 172	178, 179, 180, 181

NOTE: FOR ILLUSTRATION, MATERIAL, FINISH, AND OTHER PERTINENT DATA, SEE SHEET 1.

Ⓐ CANCELLED AFTER 7 May 62 USE MS 35191. INTERCHANGEABILITY RELATIONSHIP-MS 35191 CAN REPLACE THE CANCELLED SCREWS OF THE SAME SIZE. THE CANCELLED MS 35244 CANNOT ALWAYS REPLACE MS 35191 AND SHOULD BE USED UNTIL EXISTING STOCK IS DEPLETED. THEN USE ONLY THE SUPERSEDING MS SCREWS OF THE SAME SIZE FOR DESIGN AND REPLACEMENT.

REVISED Ⓐ FOR CHANGES SEE SHEETS 1 AND 2
APPROVED FEB 9, 1954

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	ORD
Other Cust	SHIPS

TITLE: SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, CARBON STEEL, PHOSPHATE COATED, NF-2A AND UNF-2A.

MILITARY STANDARD
MS 35244

PROCUREMENT SPECIFICATION: FF-S-92

SUPERSEDES:

SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-1[illegible]T17:22Z
Check the source to verify that this is the current version before use.

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.