
FED. SUP CLASS
3030

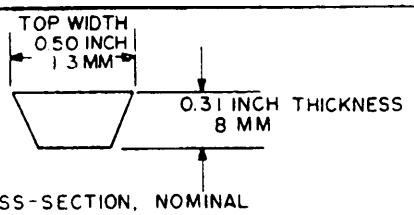

BELT CROSS-SECTION, NOMINAL

DASH NUMBERS AND EFFECTIVE OUTSIDE LENGTH

EFFECTIVE LENGTHS-INCHES

DASH NO.	EFFECTIVE OUTSIDE LENGTH	TOLERANCE
-4L180	18.0	+ 0.12-0.38
-4L190	19.0	+ 0.12-0.38
-4L200	20.0	+ 0.12-0.38
-4L210	21.0	+ 0.25-0.62
-4L220	22.0	+ 0.25-0.62
-4L230	23.0	+ 0.25-0.62
-4L240	24.0	+ 0.25-0.62
-4L250	25.0	+ 0.25-0.62
-4L260	26.0	+ 0.25-0.62
-4L270	27.0	+ 0.25-0.62
-4L280	28.0	+ 0.25-0.62
-4L290	29.0	+ 0.25-0.62
-4L300	30.0	+ 0.25-0.62
-4L310	31.0	+ 0.25-0.62
-4L320	32.0	+ 0.25-0.62
-4L330	33.0	+ 0.25-0.62
-4L340	34.0	+ 0.25-0.62
-4L350	35.0	+ 0.25-0.62
-4L360	36.0	+ 0.25-0.62
-4L370	37.0	+ 0.25-0.62
-4L380	38.0	+ 0.25-0.62
-4L390	39.0	+ 0.25-0.62
-4L400	40.0	+ 0.25-0.62
-4L410	41.0	+ 0.25-0.62
-4L420	42.0	+ 0.25-0.62
-4L430	43.0	+ 0.25-0.62
-4L440	44.0	+ 0.25-0.62
-4L450	45.0	+ 0.25-0.62
-4L460	46.0	+ 0.25-0.62
-4L470	47.0	+ 0.25-0.62
-4L480	48.0	+ 0.25-0.62
-4L490	49.0	+ 0.25-0.62
-4L500	50.0	+ 0.25-0.62
-4L510	51.0	+ 0.25-0.62
-4L520	52.0	+ 0.25-0.62
-4L530	53.0	+ 0.25-0.62
-4L540	54.0	+ 0.25-0.62
-4L550	55.0	+ 0.25-0.62
-4L560	56.0	+ 0.25-0.62
-4L570	57.0	+ 0.25-0.62

EFFECTIVE LENGTHS-MILLIMETERS

DASH NO.	EFFECTIVE OUTSIDE LENGTH	TOLERANCE
-13R455	455	+ 3-10
-13R485	485	+ 3-10
-13R510	510	+ 3-10
-13R535	535	+ 3-10
-13R560	560	+ 3-10
-13R585	585	+ 3-10
-13R610	610	+ 3-10
-13R635	635	+ 3-10
-13R660	660	+ 6-16
-13R685	685	+ 6-16
-13R710	710	+ 6-16
-13R735	735	+ 6-16
-13R760	760	+ 6-16
-13R785	780	+ 6-16
-13R815	815	+ 6-16
-13R840	840	+ 6-16
-13R865	865	+ 6-16
-13R890	890	+ 6-16
-13R915	915	+ 6-16
-13R940	940	+ 6-16
-13R965	965	+ 6-16
-13R990	990	+ 6-16
-13RI015	1015	+ 6-16
-13RI040	1040	+ 6-16
-13RI065	1065	+ 6-16
-13RI090	1090	+ 6-16
-13RI120	1120	+ 6-16
-13RI145	1145	+ 6-16
-13RI170	1170	+ 6-16
-13RI195	1195	+ 6-16
-13RI220	1220	+ 6-16
-13RI245	1245	+ 6-16
-13RI270	1270	+ 6-16
-13RI295	1295	+ 6-16
-13RI320	1320	+ 6-16
-13RI345	1345	+ 6-16
-13RI370	1370	+ 6-16
-13RI395	1395	+ 6-16
-13RI420	1420	+ 6-16
-13RI450	1450	+ 6-16

ENTIRE STANDARD REVISED

APPROVED 31 AUGUST 1964 REVISED (A) 9MAY 1973 (B) 22 JUNE 1981

REVIEW ACTIVITIES: CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P A	ME	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	99		BELT, V: FRACTIONAL HORSEPOWER (4L AND 13R CROSS-SECTIONAL DESIGNATION).	MS39242
PROCUREMENT SPECIFICATION ZZ-B-215		SUPERSEDES		SHEET 1 OF 3

DD FORM 672-1 (COORDINATED) 3030-0124

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.

DASH NUMBERS AND EFFECTIVE OUTSIDE LENGTH (CONTINUED)

EFFECTIVE LENGTHS-INCHES			EFFECTIVE LENGTHS-MILLIMETERS		
DASH NO.	EFFECTIVE OUTSIDE LENGTH	TOLERANCE	DASH NO.	EFFECTIVE OUTSIDE LENGTH	TOLERANCE
-4L580	58.0	±0.25-0.62	-13R1475	1475	± 6-16
-4L590	59.0	±0.25-0.62	-13R1500	1500	± 6-16
-4L600	60.0	±0.25-0.62	-13R1525	1525	± 6-16
-4L610	61.0	±0.31-0.6[illegible]	-13R1550	1550	± 8-18
-4L620	62.0	±0.31-0.6[illegible]	-13R1575	1575	± 8-18
-4L630	63.0	±0.31-0.69	-13R1600	1600	± 8-18
-4L640	64.0	±0.31-0.69	-13R1625	1625	± 8-18
-4L650	65.0	±0.31-0.69	-13R1650	1650	± 8-18
-4L660	66.0	±0.31-0.69	-13R1675	1675	± 8-18
-4L670	67.0	±0.31-0.69	-13R1700	1700	± 8-18
-4L680	68.0	±0.31-0.69	-13R1725	1725	± 8-18
-4L690	69.0	±0.31-0.69	-13R1755	1755	± 8-18
-4L700	70.0	±0.31-0.69	-13R1780	1780	± 8-18
-4L710	71.0	±0.31-0.69	-13R1805	1805	± 8-18
-4L720	72.0	±0.31-0.69	-13R1830	1830	± 8-18
-4L730	73.0	±0.31-0.69	-13R1855	1855	± 8-18
-4L740	74.0	±0.31-0.69	-13R1880	1880	± 8-18
-4L750	75.0	±0.31-0.69	-13R1905	1905	± 8-18
-4L760	76.0	±0.31-0.69	-13R1930	1930	± 8-18
-4L770	77.0	±0.31-0.69	-13R1955	1955	± 8-18
-4L780	78.0	±0.31-0.69	-13R1980	1980	± 8-18
-4L790	79.0	±0.31-0.69	-13R2010	2010	± 8-18
-4L800	80.0	±0.62-0.88	-13R2030	2030	±16-22
-4L820	82.0	±0.62-0.88	-13R2080	2080	±16-22
-4L840	84.0	±0.62-0.88	-13R2130	2130	±16-22
-4L860	86.0	±0.62-0.88	-13R2180	2180	±16-22
-4L880	88.0	±0.62-0.88	-13R2240	2240	±16-22
-4L900	90.0	±0.62-0.88	-13R2290	2290	±16-22
-4L920	92.0	±0.62-0.88	-13R2340	2340	±16-22
-4L940	94.0	±0.62-0.88	-13R2390	2390	±16-22
-4L960	96.0	±0.62-0.88	-13R2440	2440	±16-22
-4L980	98.0	±0.62-0.88	-13R2470	2470	±16-22
-4L1000	100.0	±0.62-0.88	-13R2540	2540	±16-22

NOTES:

1. DIMENSIONS ARE IN INCHES AND MILLIMETERS (MM).
2. TO ORDER REQUIRED BELT SIZE SPECIFY ONLY ONE DASH NUMBER, EITHER -4L SERIES FOR INCH MEASUREMENT OR -13R SERIES FOR MILLIMETER.
3. THE MILLIMETER UNITS CHOSEN FOR THIS STANDARD ARE NOT ALWAYS AN EXACT ARITHMETIC CONVERSION OF THE CORRESPONDING INCH UNITS.
4. THE DASH NUMBERS CORRESPOND TO INDUSTRY STANDARD BELT SIZES. EXAMPLE: -4L180 THE -4L INDICATES CROSS SECTION DESIGNATION IN INCH DIMENSIONS, 180 INDICATES EFFECTIVE OUTSIDE LENGTH IN TENTHS OF INCHES; -13R455, THE -13R INDICATES CROSS SECTION DESIGNATION IN MILLIMETERS, 455 INDICATES EFFECTIVE OUTSIDE LENGTH IN MILLIMETERS,
5. OIL-RESISTANCE. SEE APPLICABLE PARAGRAPH IN ZZ-B-215, WHEN OIL-RESISTANCE IS REQUIRED THE DASH PRECEDING THE DASH NUMBER SHALL BE REPLACED BY THE LETTER "R".

(B) FOR CHANGES SEE SHEETS 1, 2, AND 3

APPROVED 31 AUGUST 1964 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
3030

6. THE MS PART NUMBER CONSISTS OF THE MS SHEET NUMBER, PLUS OIL-RESISTANCE (WHEN APPLICABLE) PLUS THE DASH NUMBER (CROSS SECTION AND LENGTH).

EXAMPLES:

MS39242 – 4L 180

- 180 — 18 INCH EFFECTIVE OUTSIDE LENGTH IN TENTHS OF INCHES
- 4L — CROSS SECTION DESIGNATION

MS39242 R 13R 455

- 455 — 455 MM EFFECTIVE OUTSIDE LENGTH
- 13R — CROSS SECTION DESIGNATION
- R — OIL-RESISTANCE REQUIRED

7 BELT RIDE LIMITS ARE +0.12, −0.03 INCH, (+3.0 −0.8 MM) MIN. BOTTOM CLEARANCE IS 0.09 INCH (2.3 MM) ON TEST PULLEY. SEE APPLICABLE PARAGRAPH IN ZZ-B-215

8 FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERANCED HEREIN.

9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

APPROVED 31 AUGUST 1964 REVISED (B) FOR CHANGES SEE SHEETS 1, 2, AND 3

P. A / Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ME / 99		BELT, V: FRACTIONAL HORSEPOWER (4L AND 13R CROSS-SECTIONAL DESIGNATION).	MS39242
PROCUREMENT SPECIFICATION: ZZ-B-215	SUPERSEDES:		SHEET 3 OF 3

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.