A-A-2560
March 1, 1988

COMMERCIAL ITEM DESCRIPTION

COPYING MACHINE, INDIRECT ELECTROSTATIC PROCESS (PORTABLE; PLAIN PAPER)

The General Services Administration has authorized the use of this commercial item description.

This description covers two types of portable copiers, one having a carrying case and the other having either a handle or carrying case.

Classification. Copiers furnished under this commercial item description shall be of two types, as hereinafter defined.

Type I - With automatic paper feed and heavy duty, rigid carrying case.

Type II - With handle or carrying case.

Salient characteristics:

Copying machines shall be newly manufactured (not rebuilt or remanufactured).
For Type I machines, the copy speed shall be 5 letter-size (8-1/2" x 11") copies per minute, minimum, when tested as specified in Test Procedure III.
For Type II machines, the maximum delivery time for first copy (after warmup) shall be 15 seconds.
Shall operate on 120 volt, 60 Hz AC electrical current.
Paper supply (tray or stack feed) for Type I machines shall hold a minimum of 40 sheets of paper. For Type II machines, no paper supply capacity is specified.
Shall be capable of copying 8-1/2" x 11" originals, full size (1:1 ratio).
Copiers shall utilize 8-1/2" x 11" paper which meets the requirements of Commercial Item Description A-A-1912.
Shall be in accordance with UL Standard No. 114.
Capability to copy carbonless blues (See Test Procedure II).

FSC 3610

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

Type I machines shall be supplied with a carrying case which meets the following requirements:
- Shall allow for convenient and reliable carrying by means of a sturdy handle.
- Shall be designed to permit the copier to be operated within the case with the lid opened.
- Shall have a rigid type construction.
- Shall have means of holding the copier firmly in place.
- Shall be sufficiently lined with a foam cushioning material to protect the copier from minor impacts encountered during normal carrying and vehicle transport.

Type II machines shall be furnished with either a handle or a carrying case. Handles and/or carrying cases shall be of such material, design and construction to provide for convenient carrying and to adequately support the weight of the copier during carrying.

Copier design shall be such that no spillage of toner or fluids occurs during carrying of the copier.

Shall have a weight not exceeding 40 pounds including carrying case.

Performance requirements. The machines shall provide copies which have the following minimum qualities when tested as specified in Test Procedure I. Paper used for testing shall conform to the requirements of Commercial Item Description A-A-1912, issue in effect on the date of the Request for Proposal (RFP). The copies of test targets presented as Figures I and II in this document are intended for illustrative purposes only. Actual targets suitable for examinations should be obtained from the sources referenced.

Resolution. The resolution shall equal or exceed 4.0 line pairs per millimeter.

Half-tones. The finished copy shall show at least two (2) distinct gray shades (excluding background).

Blackness, density. The solid darkest area on the finished copy shall show a reflectance of 10 percent or less. Adjacent background areas shall show a reflectance of 80 percent or greater.

Carbonless blue. The average reflectance shall be 50.0 percent or less.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

Test Procedure I. The copiers shall be installed in accordance with the manufacturer's normal commercial practice. Copies shall be made in accordance with the following procedure:

1. Turn on and warm up the machine.
2. Place the resolution test target (Figure I) in position for reproduction.
3. Set the darkness/lightness control per the manufacturer's operating instructions. If no instructions are provided, the control shall be set at the middle of its range.
4. Make three (3) runs of five (5) copies each.
5. Remove the 5th, 10th, and 15th copies for evaluation.
6. Repeat steps 2 through 5 using the IEEE Test Chart (Figure II).

Evaluation:

Resolution. Using a magnifier between 5X and 10X, determine the smallest line pair target in each target set which can be resolved. The line pair target is considered resolved when the lines (and spaces) are visibly separate. The resolution of the copiers shall be the lowest resolution value obtained from the 15 target sets on the three copies removed for evaluation.

Half-tones. Each of the three copies removed for evaluation shall be visually examined to determine that at least two distinct shades of gray are visible in both patterns 7 and 8 of the Test Chart. The white background shall not be considered a shade; the darkest step shall be considered a shade.

Blackness. The copies used for the half-tone evaluation also shall be visually examined to determine blackness of solid areas and whiteness of the background. Using a standard gray scale such as a "Munsell Neutral Value Scale", the observer shall visually compare patterns 7 and 8 on each copy to the gray scale. The observer shall determine the reflectance of the background by determining the reflectance of the first step of pattern 7 and the 15th step of pattern 8.

All six (6) dark area reflectance determinations shall comply with the reflectance requirement for the solid darkest area on the copy.

All six (6) background reflectance determinations shall comply with the reflectance requirement for the background area of the copy.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

Test Procedure II (Copying Carbonless Blues):

1. Turn on and warm up the machine.
2. Make five (5) copies each of the color standard charts - Hue symbol 5 PB, 7.5 PB, and 10 PB from the "Munsell Book of Color, Matte Finish Collection" with the darkness/lightness control set to make the darkest copies.
3. From each group of 5 copies, choose the 5th copy and perform the evaluation.

Evaluation:

Take the 5th copy of the 5 PB Hue Color Chart and, using visual evaluation, match the lightest symbol in the 7 Value (V) line with one of the neutral grays of the "Munsell Neutral Value Scale" and record the reflectance value.

Repeat the above using the 7.5 PB and 10 PB Hue symbols.

Take the average of the three reflectance values and use it to determine compliance with the performance requirements under Carbonless Blue.

Test Procedure III (Copy Speed):

1. The copy quantity selector will be set at 6 (one plus the required minimum speed of 5 copies per minute).
2. The "START" control will be activated; measurement of elapsed time will begin when the first copy is deposited in the receiving bin.
3. The elapsed time will end when the last copy is deposited in the receiving bin.
4. The elapsed time will be noted. If 60 seconds or less have elapsed, the copier will be judged to have passed the examination. If more than 60 seconds have elapsed, the copier will be judged to have failed the examination. An offeror may, at his/her discretion, request one retest of equipment failing this examination, and such a request will be granted. The offered copier will again be subjected to the above procedure. A second failure to meet this requirement will be considered final.

Identification. Each copier shall have the manufacturer's serial number permanently and legibly stamped or affixed on a major component in a readily accessible location. In addition, each copier shall be permanently and legibly marked in a conspicuous location with the manufacturer's name or trademark.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

Regulatory requirements. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes.

(1) Commercial Item Description A-A-1912 is available from General Services Administration, 7th & D Streets, S.W., Room 6039, Specification Section, Washington, DC 20407.

(2) U. L. Standard No. 114 is available from Underwriters Laboratories (UL) Inc., 333 Pfingsten Road, Northbrook, IL 60062.

(3) IEEE Standard 167A-1980, Facsimile Test Chart is available from the Institute of Electrical and Electronic Engineers, 50 East Huron Street, Chicago, IL 60017.

(4) Microcopy Resolution Test Chart, Standard Reference Material 1010a is available from the Office of Standard Reference Materials, National Bureau of Standards, Washington, DC 20234.

MILITARY INTERESTS:


No military interest is known to exist.

PREPARING ACTIVITY:


GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.


Figure I.

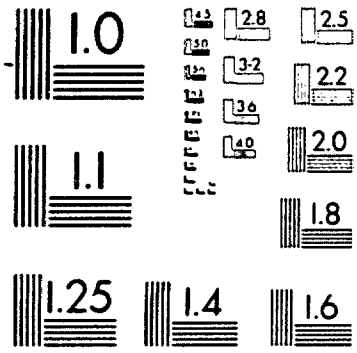

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS
STANDARD REFERENCE MATERIAL 1010a
(ANSI and ISO TEST CHART No 2

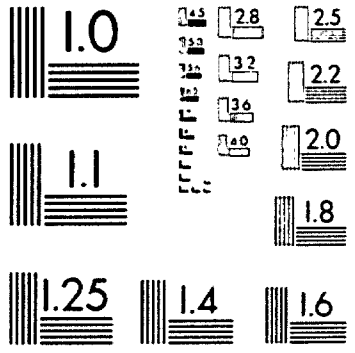



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS
STANDARD REFERENCE MATERIAL 1010a
(ANSI and ISO TEST CHART No 2)

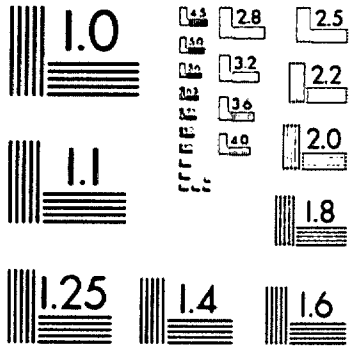


MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS
STANDARD REFERENCE MATERIAL 1010a
(ANSI and ISO TEST CHART No. 2)


MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS
STANDARD REFERENCE MATERIAL 1010a
(ANSI and ISO TEST CHART No 2)

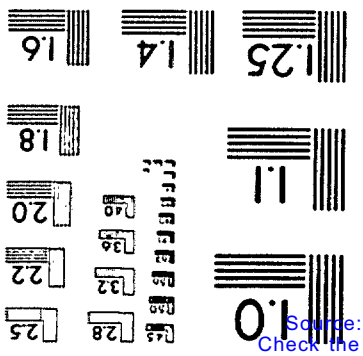


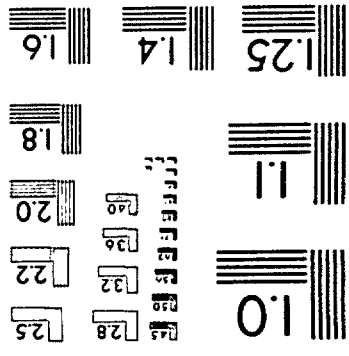

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.

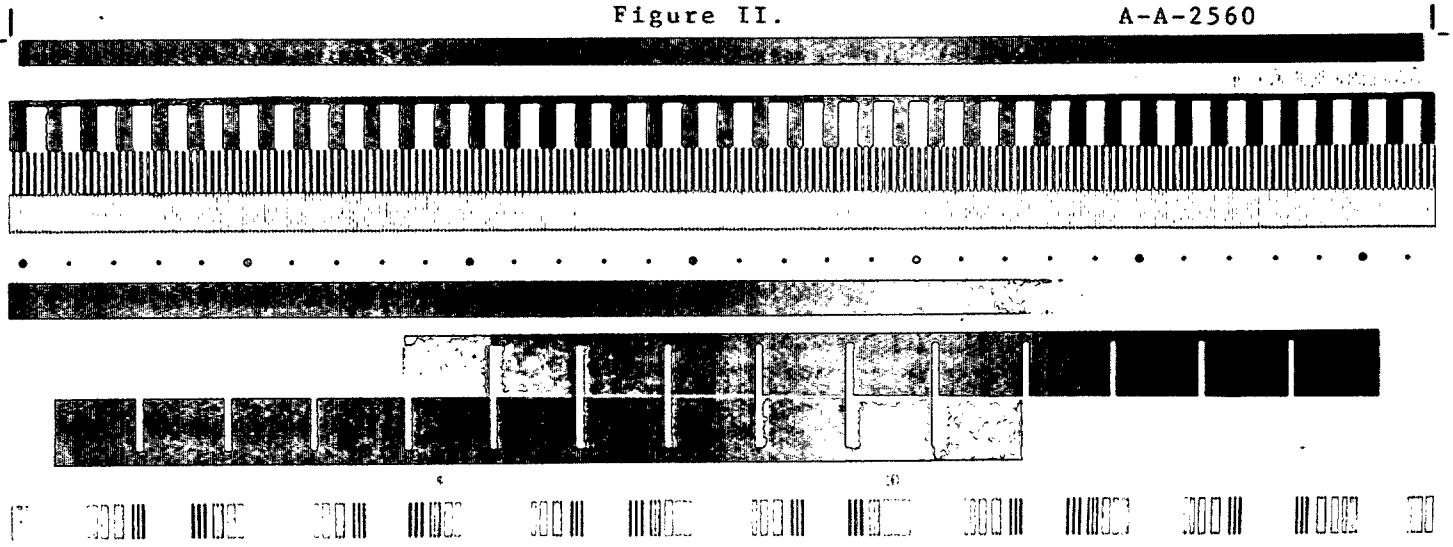

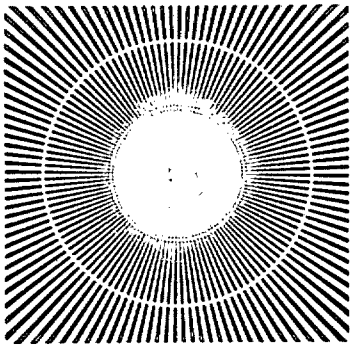






NMA MICROFONT QJKLPYZ
6BS12GH5D4X7U3W8V9E
PQR45DE9UV67CFG8STHIJNOWXABYZ
3KLM12C

ABCDEFGHIJKLMNOPQRSTUVW
XYZabcdefghijklmnopqrst
uvwxyz0123456789 OCR-B

ABCDEFGHIJKLMNOPQRSTUV
WXYZabcdefghijklmnopqr
stuvwxyz1234567890PICA

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 Elite

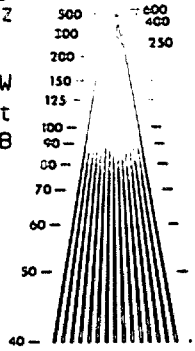



ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 Spartan Medium 6 pt


ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 Spartan Medium 8 pt

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 Spartan Medium 10 pt

ABCDEFGHIJKLMNOPQRSTUVWXYZ
abcdefghijklmnopqrstuvwxyz
1234567890 Spartan Medium 12 pt







IEEE Std 167A-1980

FACSIMILE TEST CHART

Prepared by the IEEE Facsimile Subcommittee and printed by Eastman Kodak Company. Use in accordance with IEEE Std 167-1966, Test Procedure for Facsimile. Copyright 1980, Institute of Electrical and Electronics Engineers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:24Z
Check the source to verify that this is the current version before use.