NOT MEASUREMENT SENSITIVE


MIL-B-3476/17B
10 May 1991
SUPERSEDING
MIL-B-3476/17A
30 March 1973

MILITARY SPECIFICATION SHEET

BRASSARD; MOVEMENT CONTROL, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3476.

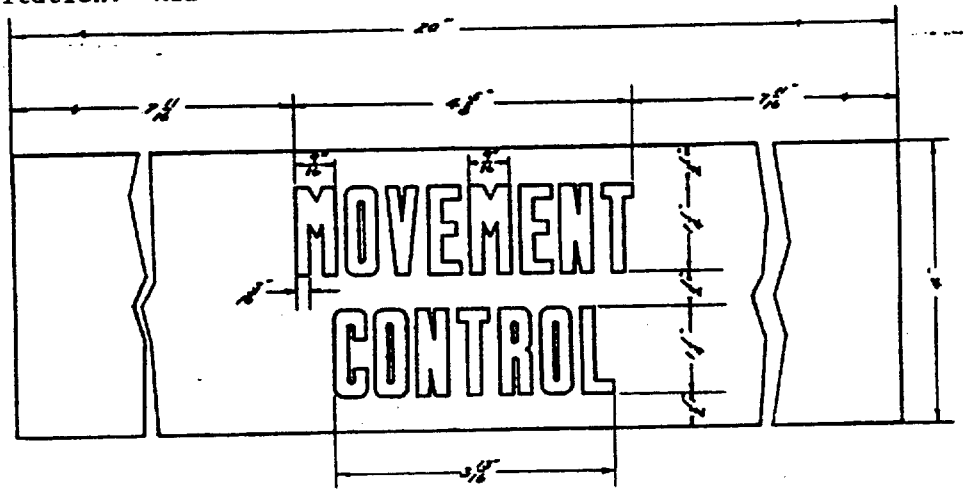

MATERIAL:
BASE: Facing cloth
LETTERING: Felt

COLOR:
BASE: Brick red (Cable No. 65020)
LETTERING: Golden yellow (Cable No. 65001)

CONSTRUCTION DETAILS:
1. Lettering shall be appliqued on the base in the position shown using Stitch Type 301 having 16 stitches to the inch.
2. The brassard shall have a 3/8 inch hem on all sides. The hemming shall be accomplished using Stitch Type EFa-1 with 12 stitches to the inch.
3. The thread for hemming and appliqueing shall conform to Type IC2, 3 Ply, Ticket No. A of V-T-276.
4. The color of the thread for hemming shall approximate red Cable No. 67113. The color of the thread for appliqueing shall approximate golden yellow Cable No. 67104.
5. The base and lettering shall be cut from a single ply of the material specified.
6. Unless otherwise indicated, each letter shall be 7/16 inch in width. Letters shall be equally spaced 1/8 inch between letters.

Custodian:
Army - IH

Review activity:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0119)

FSC 8455

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:54Z
Check the source to verify that this is the current version before use.