NOT MEASUREMENT SENSITIVE

MIL-DTL-3476/7D
20 August 1997
SUPERSEDING
MIL-B-3476/7C
10 May 1992

DETAIL SPECIFICATION SHEET

BRASSARD, DAMAGE CONTROL, NAVY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3476 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

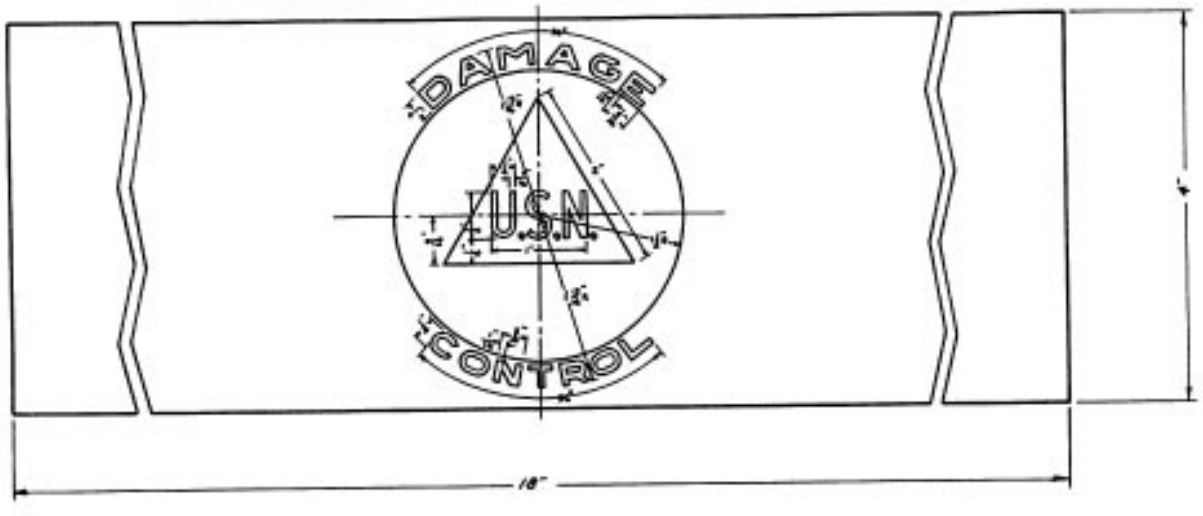

MATERIAL:
BASE: Cotton Uniform Twill
LETTERING: Printed

COLOR:
BASE: White (Cable No. White HA 65005)
LETTERS: Scarlet and Blue

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:51Z
Check the source to verify that this is the current version before use.

CONSTRUCTION DETAILS:

1. The brassard shall have a 3/8 inch (0.95 cm) hem on all sides. Hemming shall be accomplished using stitching Type EFb-1 with 12 to 14 stitches to the inch.

2. Thread for hemming shall conform to Type IC1, 3 Ply, Ticket No. A of A-A-52094. The color of the thread shall be conform to Cable No. White HA 67101.

3. The device shall be printed on the base in the location shown. All lettering shall be printed in scarlet approximating Cable No. 65006 (See TIOH Drawing Number B-8-50). The words “DAMAGE CONTROL” shall be printed in capital block letters. Each letter shall be 1/4 inch (0.04 cm) high by 5/16 inch (0.79 cm) wide and positioned as shown. The letters “U.S.N.” shall be 1/2 inch (1.27 cm) high by 1/4 inch (0.64 cm) wide and shall be located as shown. The triangle in the circle shall be white. The circle shall be blue approximating Cable No. 65010.

Custodian:
Army - IH
Navy - NU

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0839)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:51Z
Check the source to verify that this is the current version before use.