NOT MEASUREMENT SENSITIVE


MIL-B-3476/8B
10 May 1991
SUPERSEDING
MIL-B-3476/8A
30 March 1973

MILITARY SPECIFICATION SHEET

BRASSARD; FIRE TRUCK AND HOSE COMPANY, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3476.

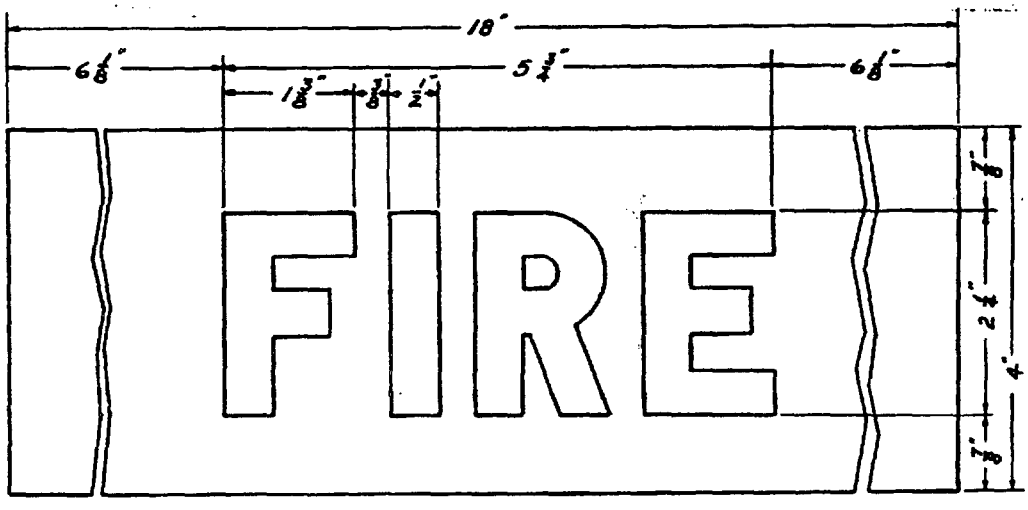

MATERIAL:
BASE: Percale
LETTERING: Wool felt

COLOR:
BASE; Scarlet (Cable No. 65006)
LETTERING: White (Cable No. 65005)

CONSTRUCTION DETAILS:
1. Lettering shall be appliqued to the base in the position shown with white cotton thread using stitch Type 301 with 14 stitches to the inch.
2. The brassard shall have a 1/8 inch hem top and bottom and a 3/8 inch hem on each side. Hemming shall be accomplished with red cotton thread using stitch Type EFa-1 with 12 stitches to the inch.
3. The thread for appliqueing shall conform to Type IA2, 3 Ply, Ticket No. 50 of V-T-276. The color of the thread shall be white conforming to Cable No. 67101
4. The thread for hemming shall conform to Type IA1, 3 Ply, Ticket No. 50 of V-T-276. The color of the thread shall be scarlet conforming to Cable No. 67111.
5. The base and letters shall be cut from a single ply of the material specified.
6. Unless otherwise indicated, each letter shall be 1-3/8 inch in width.

Custodians:
Army - IH
Air Force - 11

Preparing activity:
Army - IH

Review activities:
Air Force - 82
DLA - CT

(Project No. 8455-0119)

AMSC N/A

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:51Z
Check the source to verify that this is the current version before use.