INCH-POUND
A-A-59614/8
13 January 2014

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

COUPLING ASSEMBLY, HOSE (GARDEN, WATER, AND WATER SUCTION), PIN LUG SWIVEL

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

The complete requirements for procuring the hose coupling assemblies described herein shall consist of this document and the latest issue in effect of A-A-59614.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA59614	-3W	-8	-04
CID number	Type and class (See table I)	Style (See table I)	Size (See table II)

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Coupling assemblies supplied to this CID specification sheet shall meet the general requirements specified in A-A-59614 and be as specified herein (see figure 1).

Tightening provisions. Unless otherwise specified rocker lugs, pin lugs, or long handles shall be located on the swivel nut only. When specified rocker lugs, pin lugs, or long handles shall be located on both male and female sections.

Construction. Unless otherwise specified, type III couplings shall be cast or machined from copper alloy (brass), stainless steel, or steel and coupling components shall consist of the following (see figure 1):

a. Female section.
b. Swivel nut for female section with nut to bowl retainer.
c. Male section.
d. Gasket recess in swivel.
e. Expansion ring, one for each male and female section.

AMSC N/A FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.

Class AA couplings. When attached to hose, class AA couplings shall be able to withstand an internal hydrostatic pressure of 300 psi for sizes .50 through 1 inch, 250 psi for sizes 1.25 and 1.50 inch, 200 psi for sizes 2.00 through 4.00 inch, and 100 psi for sizes 4.50 through 5 inch, for at least one minute without showing any signs of leakage.

Class B couplings. When attached to hose specified in, type III, class B couplings shall be able to withstand an internal hydrostatic pressure as specified for class AA couplings and a 22-inch mercury vacuum for at least one minute without loss of coupling seal or where the hose joins the coupling.

TABLE I. PIN codes for type, class, and style.

Type	Class	Style	PIN type and class code	PIN style code
III	AA	8	3W	8
	B	8	3S	8

TABLE II. Size codes for all types. 1/

Class AA size	Class B size	PIN size code
—	—	-04
—	—	-05
.75	—	-06
1.00	—	-08
1.25	—	-10
1.50	1.50	-12
2.00	2.00	-16
2.50	2.50	-20
3.00	3.00	-24
3.50	3.50	-28
4.00	4.00	-32
4.50	4.50	-34
5.00	5.00	-40
6.00	6.00	-48


1/ The size indicates the nominal size of the coupling to fit the hose with that inside diameter (ID). For example, size .50 is for a coupling to fit the .50 inch ID hose.

Dimensions. Dimensions A, B, F, and G (see figure 1) shall be required to fit the specified hose and meet the pull-off and leakage requirements. Dimension C shall be so sized as not to restrict the free flow of the hose. Dimensions D and E shall be as required to accommodate the appropriate standard spanner wrench.

4.50 X 4.00 inch coupling. The 4.50 X 4.00 inch coupling shall have a 4.50 inch NH thread and shall accommodate the 4.00 inch ID hose.

Detail sections BB. Pellets, ball bearings, or square-cross-section piston-ring attachment of the swivel to the hose bowl may be used in place of still thread or groove shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.



STYLE 8

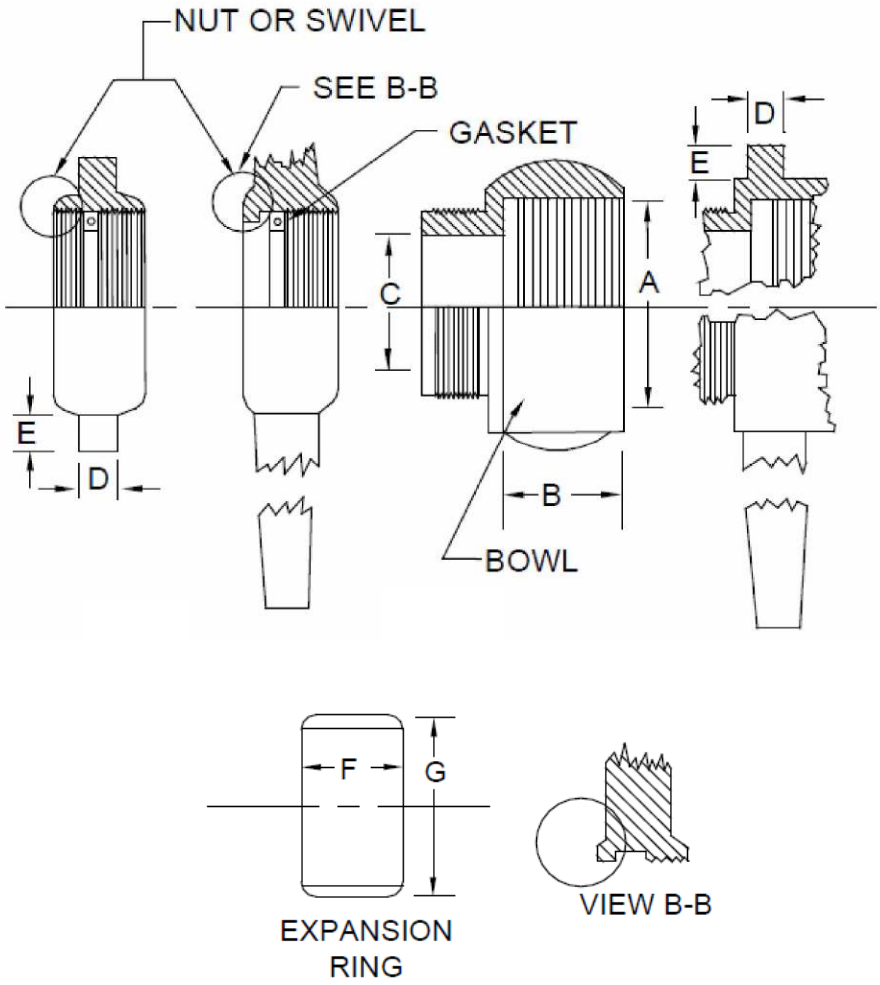


FIGURE 1. Style 8 couplings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.

Dimensions B and F (minimum) (inches).

For hose size	B	F
1.50	1.50	1.25
2.00	1.50	1.25
2.50	1.75	1.50
3.00	2.25	1.875
3.50	2.25	2.00
4.00	2.25	2.00
4.50	2.25	2.00
5.00	2.25	2.00
6.00	2.25	2.00

FIGURE 1. Style 8 couplings-Continued.

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See classification information for PIN format example.

Source of documents.

COMMERCIAL ITEM DESCRIPTIONS

A-A-59614 -Coupling Assembly, Hose (Garden, Water, And Water Suction)

(Copies of these documents are available online at http://assist.dla.mil/quicksearch/ or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict procurement to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
1U339	Labarge Products, Inc. 2900 Brannon Avenue St. Louis, MO 63139 Phone number: 1-314-776-2900 Fax number: 1-314-776-6444 sales@whsmithco.com www.labargepro.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.

30659

Moon American Inc.
167-B SW Cutoff
Worchester, MA 01604
Phone number: 1-507-798-8887
Fax number: 1-508-798-7839
sales@moon-american.com
www.moon-american.com

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - SH
Air Force - 99
DLA - CC

Review activities:
Navy - SA
Air Force - 71

CIVIL AGENCY COORDINATING ACTIVITY:

GSA-FSS

Preparing activity:
DLA - CC

(Project 4730-2013-090)

NOTE: The activities listed above were interested in this document as the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:21Z
Check the source to verify that this is the current version before use.