[INCH-POUND]
A-A-59886/3B
12 April 2021
SUPERSEDING
A-A-59886/3A
27 October 2011

COMMERCIAL ITEM DESCRIPTION
SPECIFICATION SHEET

CIRCUIT BREAKERS, MINIATURE, THERMAL MAGNETIC, SHOCK ENHANCED, TRIP-FREE, SERIES TRIP, HIGH DENSITY DESIGN, 35 MM DIN CHANNEL MOUNT, THREE POLE, 0.2 TO 30 AMPERES (A)

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

The complete requirements for procuring the circuit breakers described herein shall consist of this document and the issue in effect of CID A-A-59886.

CLASSIFICATION/PART OR IDENTIFICATION NUMBER (PIN). This commercial item description (CID) specification sheet uses a classification system which is included in the PIN as shown in the following example (see NOTES).

AA59886	/03	-	001	A
CID number	Applicable CID specification sheet (two digits)		Current rating (see table I)	(A) Auxiliary contacts Blank for no auxiliary contacts.

SALIENT CHARACTERISTICS.

Interface and physical dimensions. Circuit breakers supplied to this CID specification sheet shall be as specified herein and shall meet the requirements of UL 1077 and CSA C22.2 Number 235 for supplementary protectors and EN/IEC 60934 for circuit breakers for equipment (CBE) (see figure 1).

Maximum voltage and frequency rating. The maximum voltage and frequency rating shall be 480 V ac/ 277 V ac at 50/60 Hertz, 65 V dc.

Current rating. The current rating shall be in accordance with table I.

Calibration (Time delay). Calibration (time delay) shall be in accordance with table II.

Temperature range. The temperature range shall be -40°F to 149°F (-40°C to 65°C) non-condensing.

Operating life. The operating life shall be 6,000 operations at rated current.


Housing material. The housing material shall be glass-filled Polyamide 6.6.

Shock. The shock shall be 25 G, 11 ms duration.

Terminal type. The terminal type shall be tubular screw with self-lifting box lug.

Wire size. The wire size shall be number 22 to number 10 AWG.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:30Z
Check the source to verify that this is the current version before use.

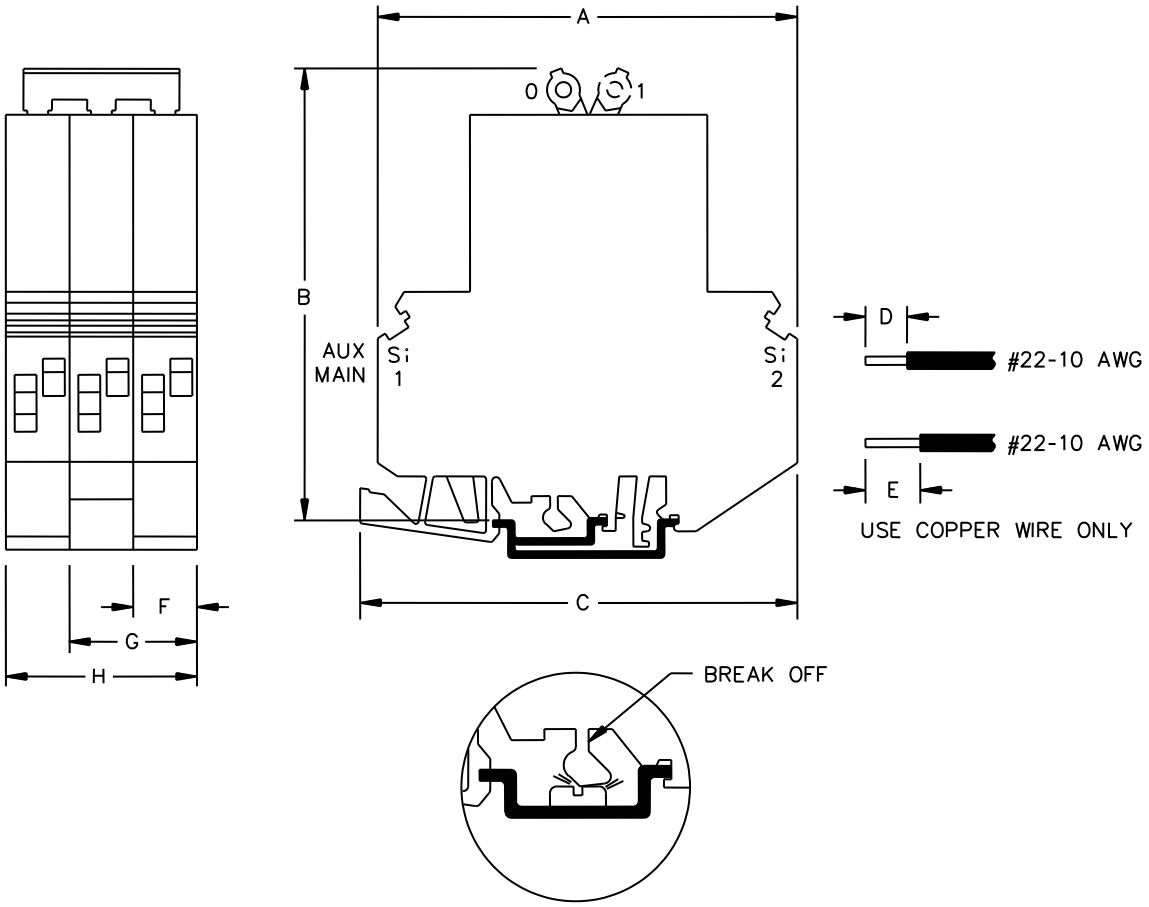

Ltr	Inches		mm	
	Min	Max	Min	Max
A	3.475	3.485	88.27	88.52
B	3.145	3.155	80.01	80.14
C	3.475	3.485	88.27	88.52
D	.405	0.415	10.29	10.54
E	.505	0.515	12.83	13.08
F	.485	0.495	12.32	12.57
G	.975	0.985	24.77	25.02
H	1.465	1.475	37.21	37.47

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).

FIGURE 1. Interface and physical dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:30Z
Check the source to verify that this is the current version before use.

TABLE I. PIN dash number parameters.

CID dash number AA59886/03-	Current rating (Amperes)	CID dash number AA59886/03-	Current rating (Amperes)
001	0.2	011	5.0
002	0.5	012	6.0
003	0.8	013	7.0
004	1.0	014	8.0
005	1.2	015	10.0
006	1.5	016	12.0
007	2.0	017	15.0
008	2.5	018	16.0
009	3.0	019	20.0
010	4.0	020	25.0

TABLE II. Calibration (time delay) in seconds.

Tripping-time delay at +21.1°C (70°F) (tripping time in seconds)								
Time delay Percent rated current	100 percent		200 percent		300 percent		400 percent	
Tripping times (seconds)	Max	Min	Max	Min	Max	Min	Max	Min
	No trip		40	10	18	3	9	1.5
Time delay Percent rated current	500 percent		600 percent		1000 percent		2000 percent greater	
Tripping times (seconds)	Max	Min	Max	Min	Max	Min	Max	Min
	6	0.8	4	0.003	2	0.009	0.02	n/a

Recommended wire strip length. The recommended wire strip length shall be .51 inch (13 mm) for the main terminal and .41 inch (10.4 mm) for the auxiliary terminal.

Terminal torque. 0.656 Newton meters (N m) (5 pounds (lb) inch)

Auxiliary contacts (N.O. or N.C.). Contact capacity shall be 1.0 amperes ac or dc (Resistive load).

NOTES.

PIN. The PIN should be used for Government purposes to buy commercial products to this CID specification sheet. See the classification information for PIN format example.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:30Z
Check the source to verify that this is the current version before use.

Source of documents.

Other Publications

CANADIAN STANDARDS ASSOCIATION (CSA)

CSA C22.2 NO 235 - Supplementary Protectors.

(Copies of this document is available online at https://www.csagroup.org/ or from the Canadian Standards Association, 8501 East Pleasant Valley Road, Cleveland, Ohio 44131-5575.)

INTERNATIONAL ELECTROTECHNICAL COMMISSION (IEC)

EN/IEC 60934 - Circuit Breakers for Equipment (CBE).

(Copies of this document is available online at https://www.iec.ch/ or from the International Electrotechnical Commission , 446 Main Street, 16th Floor, Worcester, MA 01608.)

UNDERWRITERS LABORATORIES, INCORPORATED (UL)

UL 1077 - Supplementary Protectors for Use in Electrical Equipment, Standard For Safety.

(Copies of this document is available online at https://www.ul.com/ or from the Underwriters Laboratories, Incorporated, 333 Pfingsten Road, Northbrook, IL 60062-2096.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Commercial products. As part of the market analysis and research effort, this CID specification sheet was coordinated with the following manufacturers of commercial products. At the time of CID specification sheet preparation and coordination, these manufacturers were known to have commercial products that would meet the requirements of this CID specification sheet. (NOTE: This information should not be considered as a list of approved manufacturers or be used to restrict acquisition to only the manufacturers shown.)

MFR's CAGE	MFR's name and address
4H047	Rockwell Automation, Incorporated 1 Allen-Bradley Drive Mayfield Heights, OH 44124-6118 Phone number: (440) 646-5000 Facsimile number: (440) 646-3138 E-mail: RAGov@ra.rockwell.com Uniform Resource Locator (URL): www.rockwellautomation.com

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:30Z
Check the source to verify that this is the current version before use.

Part number (P/N) supersession data. These CID specification sheet PINs supersede the following MFR's P/N's as shown. This information is being provided to assist in reducing proliferation in the Government inventory system.

TABLE III. P/N supersession data.

CID dash number (see table I) AA59886/03-	MFR's CAGE 4H047 MFR's P/N 1/	CID dash number (see table I) AA59886/03-	MFR's CAGE 4H047 MFR's P/N 1/
001	1492-GS3G002	001A	1492-GS3G002H1
002	1492-GS3G005	002A	1492-GS3G005H1
003	1492-GS3G008	003A	1492-GS3G008H1
004	1492-GS3G010	004A	1492-GS3G010H1
005	1492-GS3G012	005A	1492-GS3G012H1
006	1492-GS3G015	006A	1492-GS3G015H1
007	1492-GS3G020	007A	1492-GS3G020H1
008	1492-GS3G025	008A	1492-GS3G025H1
009	1492-GS3G030	009A	1492-GS3G030H1
010	1492-GS3G040	010A	1492-GS3G040H1
011	1492-GS3G050	011A	1492-GS3G050H1
012	1492-GS3G060	012A	1492-GS3G060H1
013	1492-GS3G070	013A	1492-GS3G070H1
014	1492-GS3G080	014A	1492-GS3G080H1
015	1492-GS3G100	015A	1492-GS3G100H1
016	1492-GS3G120	016A	1492-GS3G120H1
017	1492-GS3G150	017A	1492-GS3G150H1
018	1492-GS3G160	018A	1492-GS3G160H1
019	1492-GS3G200	019A	1492-GS3G200H1
020	1492-GS3G250	020A	1492-GS3G250H1

1/ The manufacturer's P/N shall not be used for acquisition to the requirements of this CID. At the time of preparation of this CID, the aforementioned commercial products were reviewed and could be replaced by the CID P/N shown. For actual part marking requirements see the marking paragraph of A-A-59886.

Changes from previous issue. The margins of this CID are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:30Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Navy - EC
DLA - CC

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FAS

Preparing activity:

DLA-CC

Project 5925-2021-009

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:30Z
Check the source to verify that this is the current version before use.