KK-G-476 (GSA-FSS)
23 October 1951
SUPERSEDING
Fed. Spec. KK-G-470
September 12, 1949

INTERIM FEDERAL SPECIFICATION

GLOVES; LEATHER, GAUNTLET, LINEMEN'S

(This Interim Federal Specification has been prepared by the Federal Supply Service, General Services Administration, based upon currently available technical information, but has not beenaapproved for promulgation as a regular Federal Specification. It is subject to modification, and, pending its promulgation as a regular Federal Specification, may be used in procurement.)

1. SCOPE AND CLASSIFICATION

1.1 Scope.- Thi s specification covers work gloves used by linemen but does not include protective or safety gloves in which a rubber insert is used.

1.2 Classification.

1.2.1 Type and grade.- Leather gauntlet gloves covered by this specification shall be of one type and grade. (See fig.1.)

1.2.2 Sizes.- The gloves shall be furnished in the following sizes, as specified (see table II):

Small
Medium
Large
Extra large

2. APPLICABLE SPECIFICATIONS

2.1 The following Federal Specifications, of the issues in effect on date of invitation for bids, form a part of this specification:

V-T-276 - Thread; Cotton.
KK-L-311 - Leather and Leather Products; General Specifications (Methods of Sampling, Inspection, and Tests).
CCC-D-771 - Duck, Cotton, Plied Yarns (Army, Numbered, and Test-Duck).
DDD-S-751 - Stitches; Seams; and Stitching.
CCC-T-191 - Textile Test Methods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

(Copies of Federal Specifications and the Federal Specifications Index may be obtained upon application, accompanied by money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington 25, D. C., or to the GSA Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco and Seattle. Prices may be obtained from the Superintendent of Documents or from the GSA Regional Offices.

(Copies of this and other Interim Federal Specifications may be obtained upon application to the issuing agency or to the GSA Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City Mo., Dallas, Denver, San Francisco, and Seattle.)

2.2 Specifications applicable only to individual departments are listed in section 7.

3. REQUIREMENTS

3.1 Material.

3.1.1 Leather.- The leather used shall be as specified (see 3.8.1.) The leather shall be chrome-tanned, pliable, free from flesh cuts, sponginess, or other defects which may affect the serviceability. Slight salt stains, and grown-over cuts or scratches where the grain is not broken or the wearing quality of the leather is not impaired, will be permitted. When grain horsehide is used, it shall be full-grain horsehide fronts, i.e., sides with the butts trimmed off, the front shanks cut off at the knee, and the snout cut off; palms cut from cowhide shall be free from grub holes and deep wrinkles. When split cowhide is used, it shall be made from flesh split cowhide. Middle splits, head and shoulder, or belly splits shall not be used. Palms, thumbs, fingers, and backs shall be made from the best selected cuts.

3.1.1.1 Weight of leather.- The weight of the leather shall be not less than $2\frac{1}{2}$ ounces not more than $3\frac{1}{2}$ ounces (1 ounce is equal to 1/64 inch).

3.1.1.2 Stitch tearing strength.- The stitch tearing strength of the leather shall be not less than 800 pounds per inch of thickness.

3.1.1.3 Flexibility and shrinkage.- The leather shall not lose its flexibility and the shrinkage shall be not more than 5 percent when subjected to the test described in 4.3.2.

3.1.1.4 Chemical requirements.- The leather shall be fully chrometanned and shall conform to the requirements in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

Table I.- Chemical requirements

	Percent by weight	
	Minimum	Maximum
Chromic oxide (moisture - and grease-free basis - - - - - - - - - - - - - - - - - -	3.5	- - -
Grease (dry basis) - - - - - - - - - - - - -	10.0	20.0
Acidity (pH) - - - - - - - - - - - - - - - -	3.5	--- -

3.1.2 Thread.- Unless otherwise specified, the thread shall be 16/4 cord, unbleached cotton, conforming to the requirements for type IA1 of Federal Specification V-T-276.

3.1.3 Gauntlet cuff facing.- The gauntlet cuff facing shall be cotton duck conforming to the requirements for type I, number 8, hard-texture numbered duck described in Federal Specification CCC-D-771.

3.2 Stitches, seams, and stitching.- Unless otherwise specified, all stitching and seaming shall be done with stitch type 301 (lockstitch) and seam types as specified, in conformance with the requirements of Federal Specification DDD-S-751, using not less than 7 nor more than 10 stitches per inch. The beginning and end of all stitching shall be securely backstitched not less than 3 stitches. (See 3.8.4.)

3.3 Color.- The color of the leather gloves shall be cream or light gray.

3.4 Dimensions of gloves.- The finished gloves shall conform to the dimensions shown in table II. Measurements shall be taken as shown in figure 1.

Table II.- Finished dimensions of gloves

Measurement	Sizes				Tolerance plus or minus
	Small	Medium	Large	Extra large	
	Inches	Inches	Inches	Inches	Inch
A - Top edge of cuff to tip of second finger	12-3/4	13	13½	14	1/2
B - Bottom edge of cuff to tip of second finger	7-3/4	8	8½	8-3/4	1/4
C - Across palm at thumb crotch, seam to seam	4-1/2	5	5½	5-3/4	1/8
D - Tip of index finger to thunb crotch	4-3/4	5	5½	5-3/4	1/8
E - Thumb crotch to tip of thumb	2-3/4	3	3¼	3-1/2	1/8
F - Across bottom edge of cuff	4-3/4	5	5½	6	1/4
G - Across top edge of cuff	6-1/4	6-3/4	7	7-1/2	1/4

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

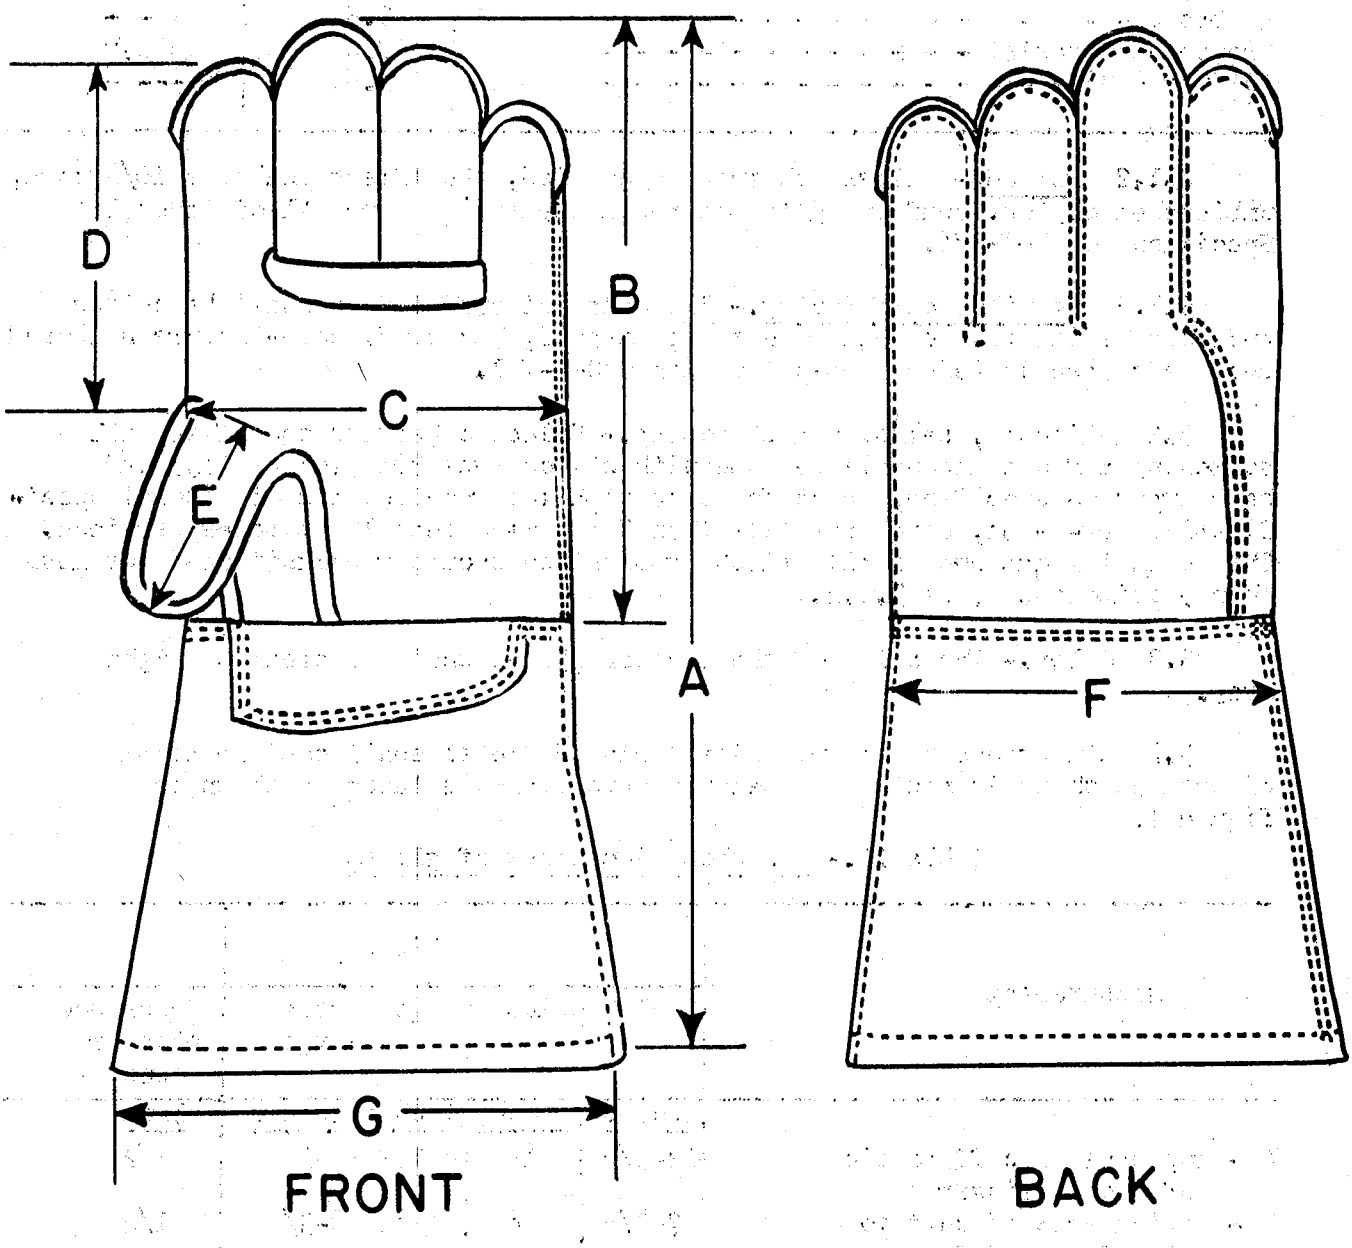


Figure 1.- Linemen's glove

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.5 Dimensions of reinforcements.- The fourchette strips shall be approximately 3/4 inch wide, the flaps approximately 2 inches wide, and the welts for "Davey-tips" approximately 1/2 inch wide. The welt strips for reinforcing seams shall be cut about 7/32 inch wide.

3.6 Pairing.- The gloves shall be well matched and paired, and securely stitched or stapled together.

3.7 Marking.- Each glove shall have the size printed plainly on the inside of the back near the hem of the cuff.

3.8 Detail requirements.

3.8.1 Leather.

3.8.1.1 Hand section.- The back of the glove shall be of split cowhide leather. The palm, thumb, fingers, and reinforcing pieces shall be of full-grain leather, as specified:

Horsehide.
Cowhide.
Buckskin.

3.8.1.2 Gauntlet.- The gauntlet shall be of split cowhide leather.

3.8.2 Design.- The gloves shall be made in two sections as follows, as shown in figure 1:

(a) Palm, thumb, and fingers.
(b) Two-piece gauntlet.

3.8.3 Construction.

3.8.3.1 Glove section.- The thunb shall be of "inseam" construction, the fingers of "outseam" construction; the thumb shall be furnished with an "all-around-turn-back" welt, and the ends of the fingers with similar welts, "Davey-tips". A protective welt shall be provided for the fourchette stitching, caught in the seaming of the fourchette and turned back over the bottom of the fingers. In addition, the top of the palm and fingers shall be reinforced with a flap which shall be caught in the seaming of the gauntlet, turned back, and sewed down to the gauntlet.

3.8.3.2 Gauntlet.- The gauntlet shall be made in two pieces, each piece lined with cotton duck extending to within 3.8 inch of the top edge of the gauntlet to facilitate the hemming of the top edge. The hem shall be 1/2 to 5/8 inch wide. The remainder of the glove shall be unlined. The joining of the gauntlet and the "closing" shall be of "outseam" construction.

3.8.4 Stitching and seaming.- Stitches and seams of the glove shall conform to the requirements in table III. (See 3.2.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

Table III.- Stitches and seams in linemen's gloves

Operation	Rows of stitching	Gage	Seam and stitching types
		Inch	
Uniting welt, palm, and fourchette	Double	1/16 to 3/32	LSa-2
Joining palm and thumb - - - - - -	Single	- - - -	SSa-1
Joining fingers- - - - - - - - - -	Single	- - - -	SSa-1
Sewing back seam - - - - - - - - -	Double	1/16 to 3/32	LSa-2
Making gauntlet - - - - - - - - - -	Double	1/8 to 3/16	LSa-2
Hemming gauntlet	Single	- - - -	EFa-1
Joining gauntlet to glove section -	Double	1/8 to 3/16	LSa-2
Turning flap over gauntlet - - - -	Double	1/8 to 3/16	SSa-2
Closing seam 1/ - - - - - - - - - -	Single	- - - -	SSa-1

1/ A second row of stitching 1/16 inch back of the first row shall be stitched on the glove section and at hem at gauntlet.

3.9 Workmanship.- The finished gloves shall be clean, well made, well formed, and free from defects which affect the appearance or which may impair the serviceability. The color of all component parts shall match as closely as possible.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 Sampling.- Unless otherwise specified, two pairs of gloves shall be taken from each lot of 100 pairs, or fraction thereof, of each size delivered, for inspection and tests.

4.2 Inspection.- Gloves shall be inspected for compliance with this specification with respect to material, workmanship, and dimensions.

4.3 Tests.

4.3.1 Unless otherwise specified, tests shall be conducted in accordance with the following methods described in Federal Specification KK-L-311:

Test	Method No.
Weight - - - - - - - - -	210.1
Stitch tearing strength	246.2
Chrome oxide - - - - - -	380.1
Grease - - - - - - - - -	320.1
Acidity (pH) - - - - - -	370.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

4.3.2 Flexibility and shrinkage test.- To determine conformance with the requirements of 3.1.1.3. the leather shall be tested as follows: Two gage marked 2 inches apart, shall be placed on a sample of the leather. The sample shall then be heated to a temperature of 85° ± 2.5° C., and then quickly immersed in cold water. The sample shall be allowed to soak for 5 minutes, then immersed in cold water. The sample shall be allowed to soak for 5 minutes, then removed and dried at 85° ± 2.5°C. The sample shall then be immersed a second time in cold water for a period of 5 minutes and removed and dried at 85° ± 2.5° C.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Unless otherwise specified, commercial packages will be acceptable.

5.2 Packing.- Unless otherwise specified, the subject commodity shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards.

5.3 Marking.

5.3.1 Issue packages.- Unless otherwise specified, issue packages shall be marked with the name and size of the commodity, the quantity contained therein, and the names of the contractor and the manufacturer.

5.3.2 Shipping containers.- Unless otherwise specified, shipping containers shall be marked with the name and size of the commodity as defined by the contract or order under which the shipment is made, the quantity of each size contained therein, the name of the contractor, the number of the contract or order, the name and address of the consignee, and the gross weight.

6. NOTES

6.1 Ordering data.- Purchasers should specify the size of glove and the leather required, and should exercise any desired options offered herein. (See 1.2, 3.1.2, 3.2, 3.8.1, 4.1, 4.3.1, 5.1, and 5.3.)

Patent notice.- When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specification, of the issues in effect on date of invitation for bids, and special requirements form a part of this specification for purchases made under this specification by the respective departments.

7.2 Army.

7.2.1 Applicable specification.

DDD-S-751 - Stitches, Seams and Stitching.

(Copies of specifications, standards, and drawings required by the contractor in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer.)

7.2 2 Construction of linemen's gloves.- Construction of the linemen's gloves shall be as specified hereinafter. All stitching and seaming specified shall be in accordance with Federal Specification DDD-S-751.

7.2.2.1 Cutting of leather.- Skins shall be dampened and all the stretch in the lengthwise direction pulled out before cutting gloves.

7.2.2.2 Body stretch of leather.- There shall be sufficient stretch in the width direction of the leather to prevent, in the finished glove, constriction or binding across the back of the hand and knuckles when fingers are doubled under to form a fist.

7.2.2.3 Join palm to fourchette.- Lap the palm over the fourchette. Position the welt piece on top on a line with the edge of the palm, with the grain of the leather of welt over and against the grain of the leather of the palm. Unite welt, palm, and fourchette with a double row of stitching 1/16 to 3/32 inch gage; seam type LSa-2. The welt piece shall be so positioned that when turned back over the seam, it shall measure not less than 1/2 inch wide and match the grain of the palm. The contacting corners of the welt piece shall be caught in the seaming of the first fin er and little finger respectively. The beginning and end of the stitching shall be securely backstitched with three stitches. Special care shall be exercised in the operation to avoid any twisting or distortion of the fingers.

7.2.2.4 Join thumb and palm-"inseam" construction.- Seam the thumb to the palm all around the edge of the thumb; seam type 301-SSa-1. The welt strip shall be so positioned on top of the seam and caught in the stitching that when turned back it shall match the grain of the leather thumb. The welt strip shall extend to the top of the glove. The top edges of the thumb and welt shall be caught in the seam joining the gauntlet to the glove.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

7.2.2.5 Join fingers-"outseam"construction.- The end of each of the four fingers shall have protective welt strips like the welt strip of the thumb, positioned as indicated by notches on the patterns. Seam the backs to the fronts around the fingers with the welts laid on the seam and caought in the stitching, so positioned that when turned back, they shall match the grain of the finger leather. The seaming shall be so performed as to prevent any twisting or distortion of the fingers. The end of the seaming shall be securely back-stitched about 1/2 inch; seam type 301-SSa-1.

7.2.2.6 Back seam.- Lap the front of the glove over the back of the glove, as indicated on the patterns and unite with a double row of stitching 1/16 to 1/8 inch gage; seam type 301-LSa-2.

7.2.2.7 Make gauntlet.- The gauntlet shall be made with a front and back piece of a suitable leather, each piece lined throughout with duck extending to within about 3/8 inch of the top of the gauntlet. The sides of fronts and backs shall be lapped with the fronts on top and united with a double row of stitching 1/8 to 3/16 inch gage, catching the lining pieces similarly lapped; seam type 301-LSa-2.

7.2.2.8 Hem gauntlet.- Turn the top of the gauntlet over the duck lining and single-stitch through the glove and lining 1/16 to 1/8 inch from the raw edge of the leather; stitching type 301-EFa-1; hem to measure 1/2 to 5/8 inch wide.

7.2.2.9 Join gauntlet to glove.- Lay the flap on the palm, as indicated, with the straight edge of the flap on a line with the top edge of the palm and thumb, and with the grain of the leather of the flap over and against the grain of the leather of the palm, so positioned that when turned back, the flap will match the palm. Lap the bottom edge of the gauntlet over the flap and top edge of the glove and unite the palm, flap, and gauntlet with a double row of stitching, 1/8 to 3/16 inch gage, catching the edge of the duck lining in the stitching, stitching to be placed about 1/8 inch down from top edge of palm and thumb; seam type 301-LSa-2. Turn the flap back over the gauntlet and double-stitch around the edges to the gauntlet through the duck lining 1/8 to 3/16 inch gage; seam type 301-SSa-2.

7.2.2.10 Closing seam.- Join the "fronts" to the "backs" from the top of the glove to a point about 1 inch beyond the top of the welt for the little finger, catching the welt in the seaming; seam type 301-SSa-1. Place a second row of stitching 1/32 inch back of the first row on the glove section, and at the hem of the gauntlet. The duck lining of the gauntlet shall be caught in the seaming.

7.2.3 Marking of gloves.- Each glove shall have a combination size-and-contractor's label applied by dry heat transfer to the inside of the back of the glove, at the center, about 1/2 inch down from the finished top edge. The imprint of the marking shall be in boldface yellow white type, with the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

lettering and numerals in clear outline and readily visible. The imprint shall contain the following information, with the size number not less than 1/2 inch in height and the rest of the information 1/8 inch in height:

Stock number
Nomenclature (see invitation for bids)
Size
Name of contractor
Contractor number

Military packaging, packing and marking should be included in invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

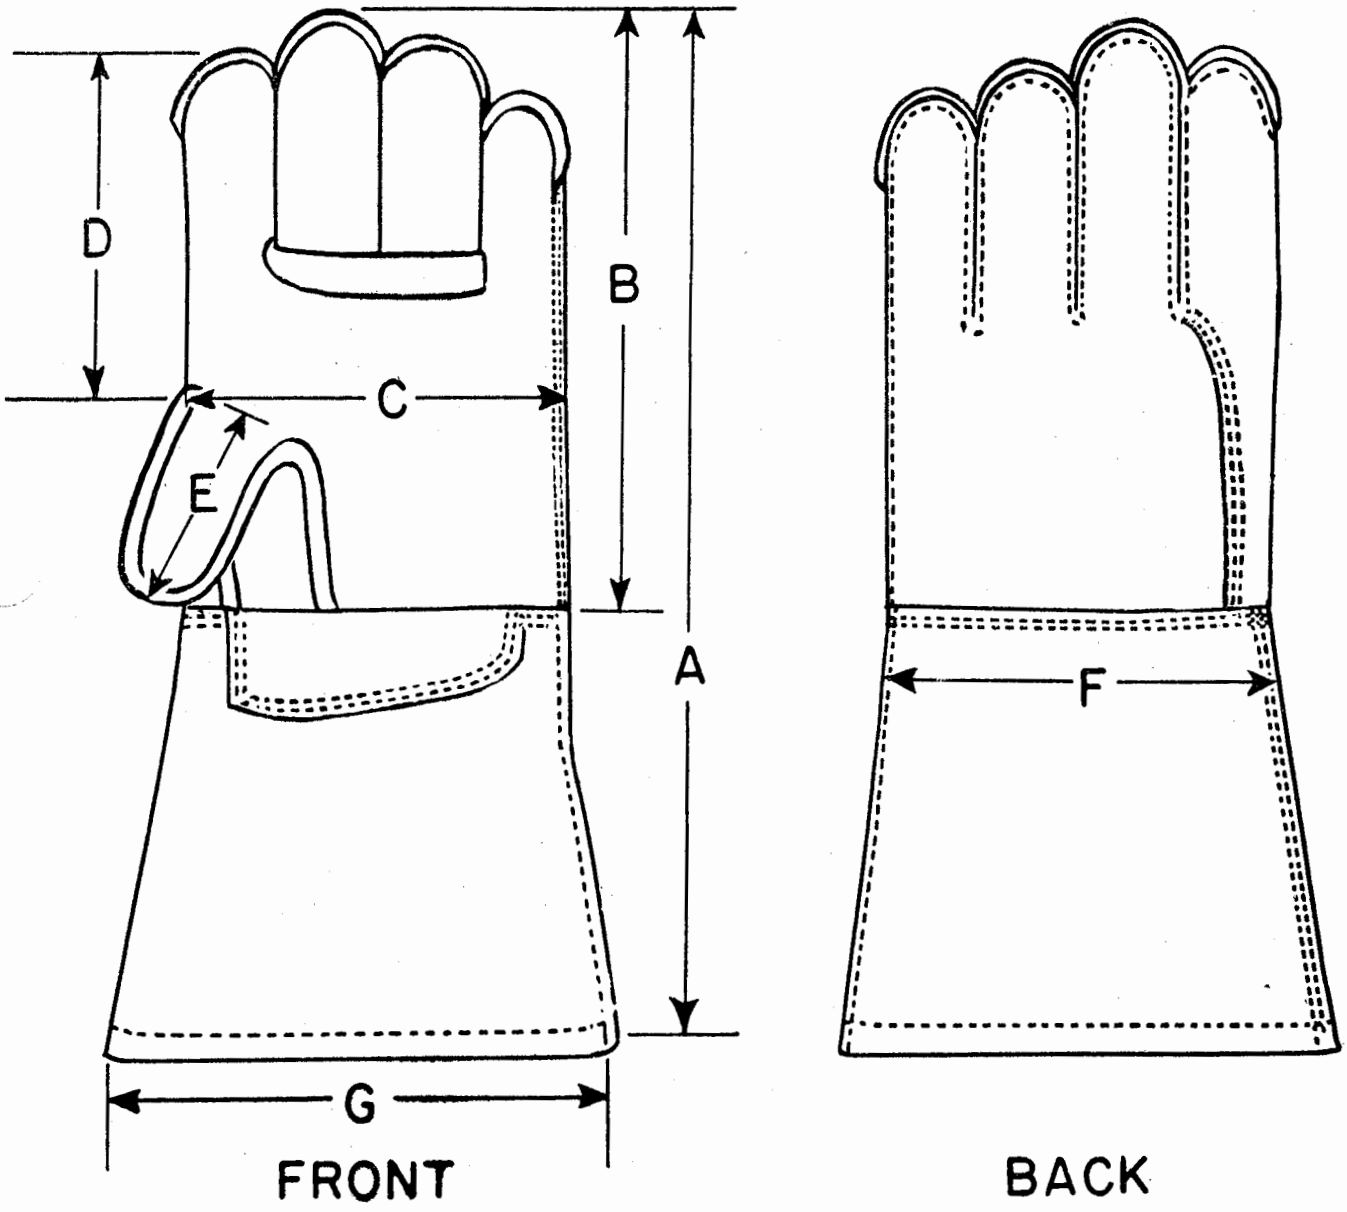


Figure 1.- Linemen's glove

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.