KK-P-001170a (GSA-FSS)
March 29, 1968
SUPERSEDING
Int. Fed. Spec. KK-P-001170 (GSA-FSS)
April 19, 1966

INTERIM FEDERAL SPECIFICATION

PORTFOLIO, ENVELOPE, LEATHER, ARTIFICIAL

LEATHER, SLIDE FASTENER

This Interim Federal Specification was developed by General Services Administration, Federal Supply Service, Washington, D. C. 20405, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers leather and artificial leather portfolios with slide fastener closure primarily intended for carrying papers, prints or similar documents.

1.2 Classification.

1.2.1 Grades. Portfolios shall be of the following grades, as specified (see 6.2):

Grade A. - Leather.

Grade B. - Artificial leather.

1.2.2 Types, sizes, class, and style. Portfolios shall be of the following types, sizes, class, and style, as specified:

Type II - Opening on three sides, without handle.
Size 14 x 10-1/2 inches.
Size 17 x 11-1/2 inches.

Type III - Opening on three sides, with sliding handles and outside pocket.
Size 17 x 11-1/2 inches.
Class B. - Without ring binders.
Style 4. - Four inner pockets.

1.2.3 Finishes. Portfolios shall be of the following finishes, as specified:

Smooth.
Boarded.
Embossed in fine grain.
Embossed in coarse grain.

2. APPLICABLE DOCUMENTS

2.1 The following specifications and standards of the issues in effect on date of invitations for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specification:

V-F-106 - Fasteners, Slide, Interlocking.
V-T-295 - Thread, Nylon.
V-T-291 - Thread, Linen.
KK-L-154 - Leather, Cattlehide, Bag and Case.
KK-L-311 - Leather, Methods of Sampling and Testing.
CCC-A-700 - Artificial Leather, Cloth Coated, Vinyl Resin, (Upholstery).

FSC 8460

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

UU-P-31 - Paper; General Specifications and Methods of Testing.
CCC-T-191 - Textile Test Methods.
PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-665 - Boxes, Paperboard, Metal Stayed (Including Stay Material)
PPP-B-676 - Boxes, Set-Up.
PPP-B-636 - Box, Fiberboard.

Federal Standards:

Fed. Std. No 751 - Stitches, Seams, and Stitchings.
Fed Std No. 123 - Marking for Domestic Shipment (Civilian agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C., 20402

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications

MIL-P-116 - Preservation, methods of.

Military Standard.

MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Leather Leather for the body of grade "A" portfolios shall be top grain cattlehide conforming to the applicable requirements of bag or case leather, class 1, of KK-L-154.

3.1.1.1 Thickness. The thickness of the leather used for the body of type II portfolios shall be 6/64 inch, and for type III portfolios 3/64 inch Leather used for the gussets shall be 3/64 inch in thickness.

3.1.1.1.1 Tolerance (thickness). The thickness of each piece of leather shall be subject to a tolerance of plus or minus 1/128 inch over not more than 50 percent of the area.

3.1.2 Artificial leather. Body material of artificial leather for grade "B" portfolios shall at least meet the requirements of class 3, treatment "b" of CCC-A-700.

3.1.3 Thread (sewing). Unless otherwise specified, thread for stitching in the fabrication of portfolios shall be of a natural color. Thread shall be linen conforming to the requirements of type B, class 2 of V-T-291, or nylon thread in accordance with V-T-295 having a breaking strength at least equal to the linen thread and shall have good colorfastness to weathering when colored thread is required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.1.4 Reinforcing material. Paper stock that has been impregnated with latex rubber or synthetic rubber or combination thereof and having a minimum thickness of 0.025 inch shall be used for backing the body material of type III portfolios. Or in lieu of the impregnated paper, plain chipboard of natural color having a minimum bursting strength of 55 pounds and average thickness of 0.026 inch may be used. The use of a combination of both materials is permissible.

3.1.5 Lining. Lining of artificial leather (vinyl coated cloth) used in construction of the slide fastener, pockets, handles, and gusset shall have a woven or knit base cloth with a total finished weight of not less than 15 ounces per square yard and a minimum breaking strength of 100 pounds in both warp and filling directions. The lining shall match the color of the face material as closely as possible, and shall be backed with a reinforcing material, 3.1.4. Body material, 3.1.2, may be used in lieu of the lining specified above.

3.1.6 Slide fasteners. The slide fasteners shall be of brass, nickle-silver, or corrosion-resistant steel; long pull tab or thong, interlocking, non-separating type; and of a medium size. The tape attached to the slide fastener shall be mildew resistant, closely matching the color of the portfolio.

3.2 Stitching. All stitching shall be accomplished by using five to eight stitches per inch, and stitch type 301 of Fed. Std. No. 751.

3.3 Color. Unless otherwise specified portfolios shall be brown or black, as specified (see 6.2).

3.4 Design Portfolios shall be of the general designs illustrated in figure 1 for the types and class. These illustrations are furnished for information only. If there are any inconsistencies between the illustrations and the written specification, the written specification shall control.

3.5 Dimensions. Dimensions of the envelopes shall be as shown in table I.

TABLE I. Outside dimensions of portfolios (minimum).

Type and size	Width	Length	Expansion
Type II:	inches	inches	inches
Size 14 x 10-1/2 inches	14	10-1/2	1-1/4
Size 17 x 11-1/2 inches	17	11-1/2	1-1/4
Type III:			
Size 17 x 11-1/2 inches	17	11-1/2	2-1/2

3.6 Type II.

3.6.1 Construction. Type II portfolios shall open on three sides by means of a slide fastener and shall lie flat when open. Each portfolio shall be made of one piece of body material and shall have two interior pockets. The top corners of the portfolio shall be rounded, and the outside edges shall be smoothly finished.

3.6.2 Slide fastener. The slide fastener shall have a binding of artificial leather, 3.1.5, securing the edges of the fastener tape to the inside edges of the body material by using not less than one row of stitching. The expansion, when the slide fastener is closed shall be not less than 1-1/4 inches. The ends of the fastener shall be sewn into a tab made of the body material which is in turn sewn to the body of the portfolio.

3.6.3 Pockets. Each portfolio shall have two inside full-width pockets, each fabricated of one piece of body material and having an inside finished measurement of not less than 5/8 inches in depth. The pockets shall be formed and secured by sewing the outside edges between the lining material, 3.1.5, and body material with not less than one row of stitching, and by sewing the bottom edge of the pocket with not less than one row of stitching, 1/4 to 3/8 inch even gage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.7 Type III

3.7.1 Construction. Type III portfolios shall open on three sides by means of a slide fastener and shall lie flat when open. Each portfolios shall be made of one piece of body material and shall have two gussets to which the slide fasteners are attached. Grade "B" portfolios shall have a backing of reinforcing material, 3.1.4, securely cemented to the body material. Grade "A" portfolios may have the the body material reinforced with the same material as required for grade "B" portfolios. Portfolios shall have four interior pockets and an outside pocket, 3.7.2, and double carrying handles of the sliding or disappearing type, 3.7.2.3. Where the handle disappears into the portfolio there shall be a reinforcement of lining material, 3.1.5, measuring approximately 4 inches by 7 inches securely cemented to the body material. The portfolios shall have no ring binders

3.7.2 Pockets The pockets shall be fabricated of lining material, 3.1.5 except that the artificial leather shall be turned over the top of the reinforcing material 1/2 inch along the entire length and cemented with a flexible adhesive.

3.7.2.1 Outside pocket. An outside inverted pocket shall be centrally located on the front or back of the body material with a slide fastener closure, 3.7.2.6, secured to the body material with two rows of stitching. The top of the pocket shall be located 1 inch from the top of the portfolio and shall measure 15-1/2 by 10 inches plus or minus 1/8 inch in dimensions.

3.7.2.2 Inside pocket, style 4. Style 4 portfolios shall have a full width gusseted inside pocket located on one side with an expansion of not less than 1-1/2 inches, on which there shall be attached two adjacent flat pockets each measuring 6 by 7 inches, plus or minus 1/8 inch, with a sewed on pencil loop at the top which shall be made of the same material as the body. On the opposing side of the portfolio there shall be a gusseted cross pocket measuring 7 by 9 inches, plus or minus 1 inch, and shall have an expansion of not less than 1-1/4 inches.

3.7.2.3 Handles. The handles shall be made from light-weight durable metal or plastic, void of spurs and sharp edges, and shall have a securely attached covering of the same material used for the body of the portfolio The handles shall have a suitable and substantial padding between the cover material and the base material. The handles shall be inserted through the top of the portfolio, between the body material and the lining, 3.1.5, in such a manner that they will slide or disappear within. There shall be a reinforcing strip of body material measuring 7-1/2 plus or minus 1/4 inch in length and 1 inch in width securely sewed to the lining to accommodate the sliding of the handles between the lining and body material. Substantial metal strip reinforcements shall be used to hold the handles from pulling loose.

3.7.2.4 Gussets. The gussets shall be fabricated of matching body material and shall consist of two strips, 1 plus or minus 1/4 inch in width reinforced with lining material, 3 1.5. Strips shall be securely sewed to the edges of the portfolio and the slide fastener securely sewed to the strips. All edges shall be turned, stitched and trimmed closely after stitching. The slide fastener shall be sewed between the body material and the lining reinforcement. The closed ends of the gussets shall be reinforced with a piece of lining to obscure the backing when viewed from the ends when the portfolio is closed.

3.7.2.5 Reinforcement (bottom). The inside bottom of the portfolio shall be reinforced by a strip of the body material. The strip shall be 2-1/2 plus or minus 1/4 inches in width and shall extend the full width of the portfolio. The strip shall be sewed in such a manner that the raw edges and stitching are unexposed.

3.7.2.6 Slide fastener. The slide fastener shall have a binding of lining material, 3.1.5, securing the edges of the fastener tape to the gussets with 2 rows of stitching, 1/4 inch gage. The ends of the fastener shall be sewn into a tab made of the body material which in turn is sewn to the body of the portfolio. The expansion, when the slide fastener is closed shall be not less than 2-1/2 inches, except for the outside pocket of the portfolio.

3.8 Identification marking. Unless otherwise specified each portfolio shall have the words "U. S. Government", the stock number, and the manufacturers name or trademark legibly and permanently imprinted in an appropriate location where it will not deface the item.

3.9 Workmanship. Protfolios shall conform to the quality and grade of product established by this specification. The occurence of defects shall not exceed the applicable acceptable quality level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection. Sampling and inspection shall be performed in accordance with MIL-STD-105 except where otherwise indicated.

4.2.1 Testing of components. In addition to the quality assurance provisions of the subsidiary specifications and drawings, inspection shall be performed on components and materials listed in table II for the characteristics shown. The inspection levels and acceptable quality levels shall be as indicated in table II.

4.2.2 Inspection of the end item.

4 2.2.1 Examination of the end item. The defects found during examination of the end product shall be classified in accordance with 4.2.2.1.1 and 4 2.2 1 2. The applicable inspection levels and AQL's shall be as indicated in 4.2.2.1.3.

4.2.2 1.1 Visual examination. The portfolios shall be examined for defects in color, type, material, workmanship and marking (table III). The sample unit shall be one completely fabricated portfolio.

4.2.2.1.2 Dimensional examination. The portfolios shall be examined for defects in dimensions. The length and width dimensions shall be determined by measurements made on the outside of the portfolio. The expansion shall be measured on the outside of the portfolio between the edges of the gusset. Measurements of pockets shall be made on inside dimensions.

4.2.2 1.3 Acceptable quality levels (AQL's) and inspection levels. The acceptable quality levels expressed in defects per hundred units and the inspection levels shall be as follows·

	Inspection level	AQL's	
		Major	Total
For defects applicable to 4.2.2.1.1.	II-------	2.5	6.5
For defects applicable to 4.2.2.1.2	S-3------	---	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE II. Instructions for testing.

Component and unit of product	Characteristics	Specification requirement paragraph	Test method or referenced specification	Requirement applicable to: Sample unit	Requirement applicable to: Lot Average	Number determinations per sample unit	Results reported as: Numerically to nearest	Results reported as: Pass or fail	Sample unit	Inspection level	AQL
Reinforcing material	Material identification	3.1.4	Comm. Std.	X	-	1	-------	X	1 sq. ft.	S-1	6.5
	Thickness	3.1.4	173 of UU-P-31	X	-	1	0.0001 inch	-	1 sq. ft.	S-1	6.5
	Bursting strength	3.1.4	112 of UU-P-31	X	-	6	0.1 pound point	-	1 sq. ft.	S-1	6.5
Lining	Weight	3.1.5	5041 of CCC-T-191	X	-	-	0.1 ounce	-	1 yd.	S-1	6.5
	Breaking strength	3.1.5	5100 of CCC-T-191	X	-	-	1 pound	-	1 yd.	S-1	6.5
Slide fastener	Material identification	3.1.6	V-F-106	X	-	1	---------	X	1	S-1	6.5
	Pull tab or thong	3.1.6	V-F-106	X	--	-	---------	X	1	S-1	6.5
	Type	3.1.6	V-F-106	X	-	-	---------	X	1	S-1	6.5
	Size	3.1.6	V-F-106	X	-	-	---------	X	1	S-1	6.5
	Tape	3.1.6	V-F-106	X	-	1	---------	X	1	S-1	6.5
Tabs	Material identification	3.6.2 and 3.7.2.6	KK-L-154 or CCC-A700	X	-	-	---------	X	1 yd.	S-1	6.5
Pencil loop	Material identification	3.7.2.2	KK-L-154 or CCC-A-700	X	-	1	---------	X	1 yd.	S-1	6.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE II. Instructions for testing -- Continued

Component and unit of product	Characteristic	Specification requirement paragraph	Test method or referenced specification	Requirement applicable to		Number determinations per sample unit	Results reported as:		Sample unit	Inspection level	AQL
				Sample unit	Lot Average		Numerically to nearest	Pass or fail			
Handles:											
Base	Material identification	3.7.2.3	Visual	X	-	1	------	X	1	S-1	6.5
Cover	Material identification	3.7.2.3	KK-L-154 or CCC-A-700	X	-	1	------	X	1yd.	S-1	6.5
Padding	Material identification	3.7.2.3	Visual	X	-	1	------	X	1	S-1	6.5
Metal strips	Material identification	3.7.2.3	Visual	X	-	1	------	X	1	S-1	6.5
Gussets	Material identification	3.7.2.4	KK-L-154 or CCC-A-700	X	-	1	------	X	1yd.	S-1	6.5
Reinforcement (bottom)	Material identification	3.7.2.5	KK-L-154 or CCC-A700	X	-	1	------	X	1yd.	S-1	6.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE III. Visual examination.

Examine	Defect	Classification	
		Major	Minor
Body material	Color not as specified	X	
	Color not uniform, seriously affecting appearance.	X	
	Color not uniform, affecting appearance but not seriously		X
	Finish not as specified, i.e., smooth, embossed, etc.	X	
Thread	Not natural or colored, as required		X
Metal or plastic components	Not as specified	X	
	Note. Metal or plastic components shall be void of spurs and sharp edges		X
Cleanness	Any nonpermanent spot or stain, i.e.,cement or foreign matter, etc., that is clearly noticeable but can be readily removed with a cleaning agent.		X
	Any permanent type stain or spot clearly noticeable that cannot be removed with a cleaning agent.	X	
Type, class, style	Not as specified	X	
Material: General	Any component not fabricated of the specified material	X	
	Surfaces not finished as specified		X
Quality of body material	Any hole, cut or rupture	X	
	Any of the following imperfections present to a degree where the condition will have a serious affect on serviceability or appearance: Grub or tick marks, open or badly healed scratched, brands, bony, loose or pipey leather. Uncoated, thinly coated, separation of coating, cracked coating, blisters, wrinkles indistinct grain, and tackiness of artificial leather	X	
	Any of the following imperfections present to a degree where the condition will have affect on serviceability or appearance but not seriously: Grub or tick marks, open or badly healed scratches, brands, bony, loose or pipey leather. Uncoated, thinly coated, separation of coating, cracked coating, blisters, wrinkles, indistinct grain, and tackiness of artificial leather		X
	Flanky, spongy or stretchy leather seriously affecting serviceability or appearance.	X	
	Flanky, spongy or stretchy leather affecting serviceability or appearance but not seriously.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

TABLE III Visual examination (cont'd)

Examine	Defect	Classification	
		Major	Minor
	Fat wrinkles of leather seriously affecting serviceability or appearance	X	
	Fat wrinkles of leather affecting serviceability or appearance, but not seriously		X
Construction and workmanship: General (applicable to all components and assemblies unless otherwise indicated herein).	Any component part or required operation omitted (unless otherwise classified herein).	X	
	Any part fractured, ripped, torn, punctured, malformed or otherwise damaged seriously affecting serviceability.	X	
	Any component misplaced or assembly malformed seriously affecting serviceability.	X	
	Any component misplaced or assembly malformed affecting serviceability, but not seriously.		X
	Portfolio not fabricated with grain side of body material on exterior surfaces	X	
Slide fastener	Any part of assembly omitted, bent, broken, cracked, or otherwise defective	X	
	Pull tab or thong omitted	X	
	Tape stitched too close to metal chain not permitting slider to pass freely		X
	Not type specified		X
	Ends of fastener not secured by tab		X
Seams and stitching	Not specified stitch type	X	
	Spacing of stitching not as specified or irregular, seriously affecting serviceability or appearance.	X	
	Spacing of stitching not as specified or irregular, affecting serviceability of appearance, but not seriously.		X
	Loose stitch tension resulting in a loosely secured seam	X	
	More than three continous stitch locks exposed on surface of body material, but seam is tight		X
	Tight stitch tension, i.e., stiches rupture body material or may break in use of end item.	X	
	More than two continous needle holes visible as a result of removal of threads.		X
	Any row of stitching omitted	X	
	Four stitches per inch		X
	Less than four stitches per inch	X	
	More than eight stitches per inch damaging material	X	
	More than eight stitches per inch but not damaging material		X
	Thread ends not trimmed		X
	Open seam Note. A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more consecutive skipped stitches or run-offs occur.	X	
Marking	Missing, incomplete, incorrect, not legible, not in proper location, or not accomplished as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

4.2 3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below, The sample unit shall be one shipping container fully packed, selected just prior to the closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot The inspection level shall be S-2 and the AQL shall be 4 0 defects per hundred units.

Examine	Defect
Marking (exterior and interior).	Omitted, incorrect, illegible, or improper size, location, sequence or method of application.
Materials ----------	Any component missing. Any component damaged, affecting serviceability.
Workmanship ---------	Inadequate application of components such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content (exterior and interior)	Number per container is more or less than required.

5 PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B or C as specified (see 6.2).

5.1.1 Level A Each portfolio shall be packaged in accordance with method IC-2 of MIL-P-116

5.1.2 Level B. Each portfolio shall be packaged in a close-fitting box conforming to PPP-B-566, PPP-B-665, or PPP-B-676, style and type optional.

5.1.3 Level C. The portfolios shall be packaged in accordance with the supplier's standard commercial practice

5.2 Packing Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Unit packages shall be packed in a box conforming to PPP-B-636, grade V3C. Each box shall be closed, waterproof sealed with tape and reinforced with bands of filament tape in accordance with the appendix to the box specification.

5.2.2 Level B. Unless otherwise specified eighteen portfolios packaged as specified in 5 1. of one type, size, class, finish, grade, color and style, shall be packed in a box conforming to PPP-B-636, type CF or SF, class domestic. Bursting strength of the fiberboard shall be not less than 275 p.s.i. Closures shall be in accordance with the appendix to the box specification.

5.2.3. Level C. The portfolios shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking.

5 3.1 Civil agencies. In addition to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5 3 2 Military agencies. In addtion to markings required by the contract or order, the interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use The various types of portfolios incorporated herein are intended for general use by Federal agencies in carrying various documents, legal papers, briefs, and other official papers, reports, catalogs, etc. Grade A portfolios are recommended for use where a higher quality product is desirable.

6 2 Ordering data. Purchasers should select the preferred options offered herein include the following information procurement documents·

(a) Title, number and the date of this specification.
(b) Grade, type, size (1.2 1, 1.2.2).
(c) Finish (1.2.3)
(d) Color (3.3)
(e) Packaging and packing (5.1 and 5.2).

6.3 The corresponding classification of items contained in previous specification KK-E-561a and KK-P-001170a are as follows·

FEDERAL SPECIFICATION KK-E-561a	INTERIM FEDERAL SPECIFICATION KK-P-001170a
Type I.	Deleted
Type II.	Type II.
Type III.	Type III.
Size 17 x 11-1/2 inches.	Size 17 x 11-1/2 inches.
Class A.- With ring binders	Deleted.
Style 2. - Two inner pockets.	Deleted.
Style 4. - Four inner pockets	Deleted.
Class B.- Without ring binders.	Class B.- Without ring binders.
Style 2. - Two inner pockets.	Deleted.
Style 4. - Four inner pockets.	Style 4. - Four inner pockets.


6 4 Level "B" packaging and packing should be used by ordering agencies only when shipment is known to be made to a holding supply depot or warehouse from which partial shipments will be made to consumers.

DOD coordination waived.

CIVIL AGENCIES INTEREST·

GSA-FSS
JUS
DC
VA-DMS
ARS
HEW


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

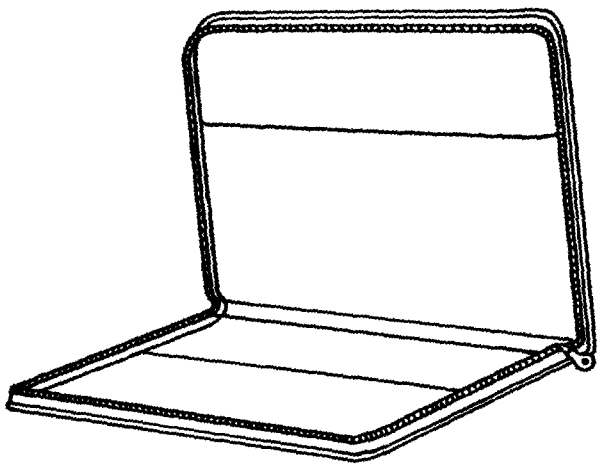

Type II. Opening on three sides, without handles



Type III. Opening on three sides, with sliding handles

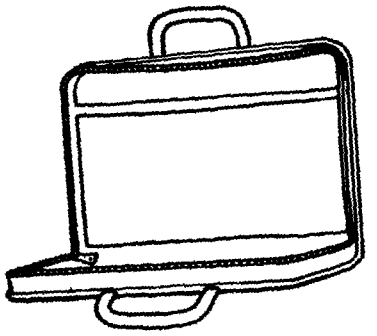

Class B. Without ring binders

Fig.1 - Portfolios.

GSA DC 68-14409

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.