KK-S-756D
June 24, 1971
SUPERSEDING
Fed. Spec. KK-S-756C
December 5, 1967

FEDERAL SPECIFICATION

STROP, MICROTOME KNIFE; AND STROP, RAZOR

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal Agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers strops for honing and finishing razors and finishing microtome knives.

1.2 Classification.

1.2.1 Types, classes, and finish. The strops covered by this specification shall be of the following types, class, and finish, as specified (see 6.2).

Type I - Deleted (see 6.4).
Type II - Leather razor finishing strop and webbing honing strop.
  Class 1 - With square end.
  Class 2 - Deleted (see 6.4).
Type III - Leather cemented to hardwood block (microtome knife).
  Finish a - Deleted (see 6.4).
  Finish b - Fine finishing strop.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

C-F-206 - Felt, Sheet, Wool, Pressed.
V-T-295 - Thread, Nylon.
KK-L-271 - Leather, Cattlehide, Strap, Vegetable-Tanned.

FSC 8530
6640

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

PPP-B-566 - Boxes, Folding, Paperboard.
PPP-B-636 - Box, Fiberboard.
PPP-B-676 - Boxes, Setup.
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).
Fed. Test Method Std. No. 191 - Textile Test methods.
Fed. Test Method Std. No. 311 - Leather, Methods of Sampling and Testing.
Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification

(Application for copies should be addressed to the National Motor Freight Traffic Association, Inc., Agent, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Tariff Publishing Officer, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variation from the specification may appear in the sample, in which case this specification shall govern.

3.2 Material.

3.2.1 Leather. The leather used for the finishing strops shall be vegetable tanned, butt shell horsehide. The thickness shall be 7/64 + 3/64, - 1/64 inch.

3.2.1.1 Finishing strops. The leather used for types II and III finishing strops shall be buffed and finished to provide a flexible finishing strop. Any sharp or rough edges of the finished side shall be removed by beveling. The color of the grain surface finishing strops shall be black and the flesh side shall be natural or black.

3.2.1.2 Leather tabs and handles. The leather tabs for the type II, class 1 strops shall be 4/64 ± 1/64 inch thick and shall conform to the requirements for 3/64 inch leather, types I, II, or III, class 2, of KK-L-271. The color of the leather shall be natural, black, or dark brown. The grain surface of the leather shall have a smooth finish. Butt shell horsehide conforming to the thicknesses above may be used as an alternate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.2.2 Metal. The metal components for the type II strops shall be malleable cast iron or 12 gage steel wire. The metal shall be chromium or nickel plated in accordance with the manufacturer's standard commercial practice.

3.2.2.1 Hanger swivel. The metal swivel used on the top end of the type II strops shall be of standard commercial design having an inside diameter of 1 ± 1/8 inches. The swivel shall be hinged to a suitable metal hanger having an overall width of 2-1/4 ± 1/8 inches. The overall length of the swivel and hanger shall be approximately 2-1/2 inches.

3.2.3 Webbing. The fabric used in type II strops shall be cotton webbing and shall conform to the physical requirements of table I. The weave shall be composed of two ground warps (face and back), one binder warp, and one stuffer warp. The face warp shall weave plain with the fillings showing on the face, and the back warp shall weave plain with the fillings showing on the back. The binder warp shall weave plain throughout. There shall be 10 ground warp yarns on each edge. The webbing shall be impregnated on the honing surface with wax and zinc white or other suitable declared material to provide an efficient honing strop. Unbleached, bleached, or dyed webbing shall be used. Tests shall be as specified in 4.2.1.

TABLE I. Physical requirements

Width ± 1/16 inches	Thickness (min.) 1/ inch	Total warp yarns (min.)	Warp yarns (min.) full width			Filling yarns per inch(min.)	Weight (min.) oz. per lin. yd
			Face and back	Binder	Stuffer		
2-1/2	0.09	632	300	36	296	46	2.30

1/ A minus tolerance of 0.008 inch is permitted to compensate for reduction in thickness from processing.

3.2.4 Thread, nylon. The thread for all stitching operations shall be nylon, conforming to size E of type I or II, class 1 or type III of V-T-295, except that requirements for colorfastness shall not apply. The color of the thread shall approximately match the leather tabs.

3.2.5 Felt. The felt used for type III strops shall conform to type I, classification Number 12R3, 3/16 inch thick of C-F-206.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.2.6 Adhesives. The adhesives used for bonding the felt, leather, and wooden block in fabrication of type III strops shall be any of the following types:

(a) Natural rubber latex.
(b) Synthetic rubber latex (including chloroprene).
(c) Natural rubber solvent.
(d) Synthetic rubber solvent cement.
(e) Synthetic resin cements.

3.2.7 Wooden block. The wood used for blocks for type III strops shall be hardwood of maple, oak, or poplar. The block shall be similar to type III, figure 1, 1-5/8 ± 1/16 inches thick, and shall be given a minimum of two coats of clear varnish over the sides, ends, and bottoms.

3.3 Construction. Thread breaks in stitching shall be backstitched not less than 1/2 inch at each break. Stitching shall be backstitched not less than 1/2 inch at the end. All thread ends shall be trimmed. All cut edges shall be evenly trimmed. Stitching margins shall be maintained so that no stitching is less than 1/16 inch from edges and seams shall be properly sewn so that no open seams or broken stitches result. During manufacture, any component or material containing defects, damages, or stains shall be replaced.

3.3.1 Type II. Type II strops shall be constructed of a horsehide finishing strop and a webbing honing strop.

3.3.1.1 Class 1. Type II, class 1 strop shall be constructed of a horsehide finishing strop and a webbing honing strop joined together by a leather tab to a metal swivel on one end with the opposite end left free and cut square. The leather finishing strop shall be finished grain side out. The leather tab shall be stitched by using a single row, 7 to 9 stitches per inch, with stitch type 301 of Fed. Std. No. 751. The length of the honing and finishing sections shall be 23 ± 1/2 inches and the width shall be 2-1/2 ± 1/16 inches. The overall length of the strop shall be 26 ± 1 inches.

3.3.2 Type III. Type III strop shall be constructed of a horsehide finishing strop, felt, and a wooden block. The felt shall be cemented securely to the wooden block, and the flesh side of the strop made to adhere to the felt. The adhesives shall be as specified in 3.2.6. The layered assembly shall be 15 ± 1/16 inches long, 2-1/2 ± 1/16 inches wide and 2 ± 1/16 inches thick. The edges of the leather, felt, and wooden block shall not vary from one another by more than 1/16 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

3.4 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Marking. The strops shall be legibly marked with the supplier's name or readily identifiable trademark in Gothic letters. Letters shall be a minimum of 9/32 inch and a maximum of 3/8 inch in height.

3.5.1 Type II. The marking on the type II strops shall be impressed into the grain side of the leather, at the top, closely below the leather tabs, in such a manner as to be permanently visible without cutting through at any point.

3.5.2 Type III. The marking on the type III strops shall be impressed on the under surface of the wooden block in the approximate center.

3.6 Workmanship. The finished strops shall conform to the quality and grade of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance (DOD procurements only). Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, testing shall be performed on components and materials listed in table II for the characteristics shown. All test reports shall contain the individual values utilized in expressing the final result. Requirements are applicable to the sample unit. The webbing shall be tested in accordance with Fed. Test Method Std. No. 191. The sample unit for testing the webbing shall be 5 continuous yards, full width. The sample size shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

Lot size (yards)	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

For the webbing, the lot shall be unacceptable if one or more units fail to meet any requirement specified.

TABLE II. Component testing

Component	Characteristic	Requirement paragraph	Test method
Leather horsehide	Material identification	3.2.1	1/
Metal components	Material identification	3.2.2	1/
Webbing	Width	3.2.3	5020 1/
	Thickness	3.2.3	5030 1/
	Warp yarns	3.2.3	5050
	Filling yarns	3.2.3	5050
	Weight	3.2.3	5041
	Weave	3.2.3	Visual 1/
	Finish	3.2.3	Visual 1/
	Impregnation	3.2.3	1/
Adhesive	Material identification	3.2.6	1/
Wooden blocks	Material identification	3.2.7	Visual 1/

1/ Unless otherwise specified in the contract or order, a certificate of compliance shall be submitted and will be acceptable for the stated requirement. With reference to the impregnation of the webbing (see 3.2.3), the supplier shall declare the composition of the material used for impregnating the webbing in his certificate of compliance.

4.2.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

4.2.3 Examination of the end item. The defects found during the examination shall be classified in accordance with list shown in 4.2.3.1 and 4.2.3.2. The sample unit for these examinations shall be one completely fabricated strop. The lot size shall be expressed in units of one strop each. The inspection level and acceptable quality level for these examinations shall be in accordance with 4.2.3.3.

4.2.3.1 Visual examination. The finished strop shall be visually examined for defects in design, material, construction, and workmanship.

Examine	Defect	Classification Major	Minor
Types II and III Horsehide	Not buffed as required	X	
	Any rough edges		X
	Any hole, cut, open scratch, brand, and hip mark 1/	X	
	Color not as specified	X	
	Color not uniform		X
Type II Leather tabs	Not required type or design	X	
	Any hole, cut, open scratch, brand, and hip mark 1/	X	
Hardware	Broken or malformed, failing to serve intended purpose, finish omitted or corroded, burrs or sharp edges	X	
Type II Webbing	Any hole, cut or tear	X	
	Any smash, broken or missing yarn	X	
	Frayed or scalloped edges not firmly and tightly woven	X	
Type III Wooden block	Any splinter or sliver	X	
	Split, crack or check	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Type II Seams and stitching			
Open seam	More than 1/4 inch, but not more than 1/2 inch		X
	More than 1/2 inch	X	
Stitches per inch and stitching margins	One stitch less than minimum specified		X
	Two or more stitches less than minimum specified	X	
	One or more stitches in excess of maximum specified		X
	Stitching less than 1/16 inch from edge		X
NOTE:	To be scored if condition exists on major portion of seam or stitching.		
Thread breaks	Backstitched less than 1/2 inch		X
Stitching end	Backstitched less than 1/2 inch		X
Types II and III General	Any component part or required operation omitted	X	
	Grease or oil stains clearly noticeable		X
	Thread ends not trimmed		X
	Any cut edge not evenly trimmed	X	
Marking	Omitted, incorrect, illegible, or misplaced		X

1/ Light, well healed scratches or grub holes shall not be classified as defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

4.2.3.2 Dimensional examination.

Examine	Defect
Width	Not within specified tolerances.
Length of honing and finishing sections	Not within specified tolerances.
Overall length	Not within specified tolerances.
Swivel and hanger	Not within specified tolerances.
Type III strop only	Length and width of the layered assembly not within specified tolerances. Edges of leather, felt and wooden block vary from one another by more than 1/16 inch.
Thickness, type III strop	Thickness of leather strop not as specified 1/

1/ Thickness shall be measured in accordance with Method 1011 of Fed. Test Method Std. No. 311. No individual thickness measurement shall be less than the minimum or greater than the maximum specified.

Examination	Inspection level	AQL's Major	AQL's Total
For defects applicable to 4.2.3.1	II	2.5	6.5
For defects applicable to 4.2.3.2	S-3	4.0	

4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine that the packaging, packing, and marking complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing or not as specified. Any component damaged.
Workmanship	Inadequate application of components, such as: crooked or noncontinuous heat sealed seams and closure of polyethylene bags, incomplete closure of polyethylene bags and container flaps, loose strapping, improper taping, inadequate stapling. Bulged or distorted container.
Content	Number of interior packages per shipping container is more or less than required. Number of strops per interior package is more or less than required 1/

1/ For this defect, one interior package from each shipping container in the sample shall be examined.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 Level A. Each strop shall be inserted full length into a close-fitting, flat or square style, clear polyethylene bag of 0.00125-inch thickness (± 25 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight and continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. Prior to or during the closure operation, excess air within the bag shall be expelled. The strop shall then be packaged in a snug-fitting folding paperboard box conforming to variety 1, style III or VIII, type G, class 1 of PPP-B-566; or setup paperboard box conforming to type I, variety 1, class A, style 4 of PPP-B-676. Box closure shall be secured with 2-inch minimum width gummed paper tape conforming to type III, grade B of PPP-T-45, applied at the center of the length opening and extending along the bottom and up each side.

5.1.2 Level B (Civil Agencies). Strops shall be packaged in accordance with 5.1.1 (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

5.1.3 Level C. Strops shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Fifty strops of one description only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Each shipping container shall be closed, waterproofed, and reinforced in accordance with the appendix of the container specification.

5.2.2 Level B. Fifty strops of one description only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the box specification.

5.2.3 Level C. Strops, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.

5.3.1 Civil Agencies. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The strops covered by this specification are intended for use in honing and finishing the edges of razors, surgical instruments, and finishing microtome knives.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, and finish required (see 1.2.1).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When level B packaging is required for Civil Agencies (see 5.1.2).
(e) When weather resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Sample. For access to samples, address the procuring activity issuing the invitation for bids.

6.4 The requirements for type I; type II; class 2; and type III, finish "a", as contained in KK-S-756C, have been deleted from this document since there is no longer a need for the items.

MILITARY CUSTODIANS:

Army - GL
Air Force - 84

Review activity:

Army - MD

User activities:

Navy - MC, MS, SA, SH

Preparing activity:

Army - GL

CIVIL AGENCIES INTEREST:

AGR
COM-NBS
GSA
INT
JUS
VA

Project No. 8530-0017

☆ U. S. GOVERNMENT PRINTING OFFICE : 1971 0 - 482-186 (3020)

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

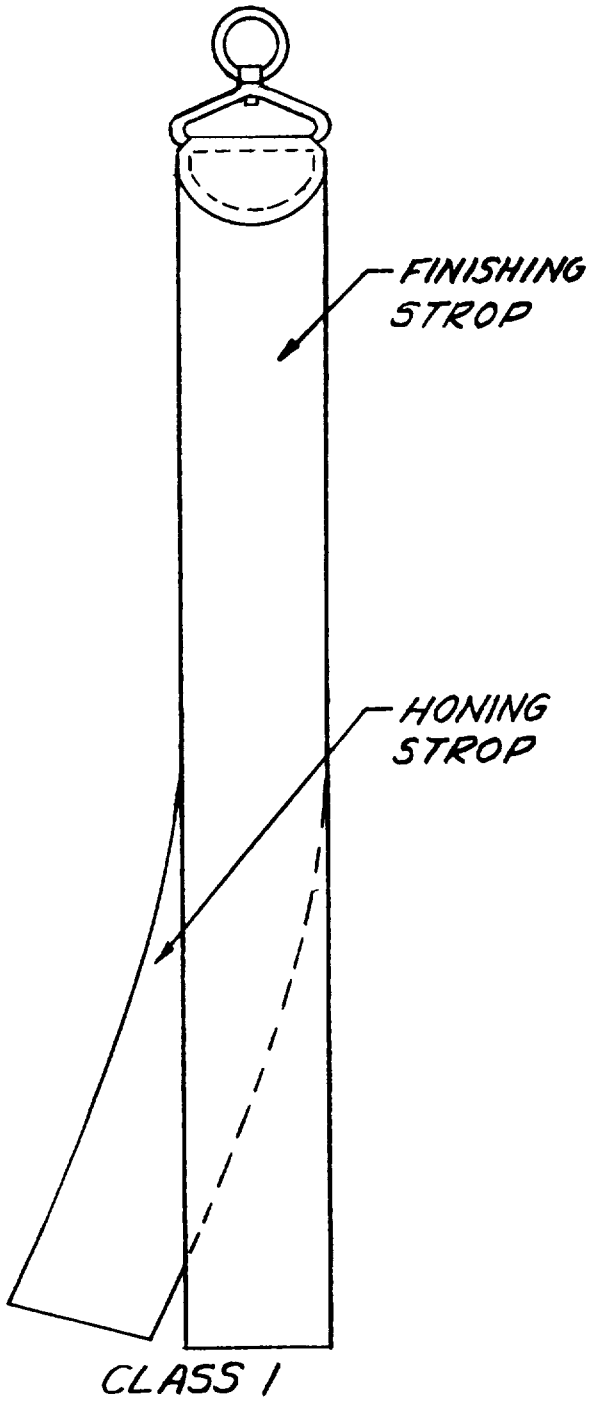


FIG. 1 - STROP, MICROTOME KNIFE AND STROP, RAZOR

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION
Strop, Microtome Knife; And Strop, Razor KK-S-756D

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A GIVE PARAGRAPH NUMBER AND WORDING

   B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?
☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

U.S.MAIL

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:57Z
Check the source to verify that this is the current version before use.