NN–H–101a
13 MARCH 1951
SUPERSEDING
Fed. Spec. NN–H–101
6 February 1934

FEDERAL SPECIFICATION

# HANDLES, MOP

*This specification was approved on the above date by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.*

## 1. CLASSIFICATION

**1.1 Types.**—Mop handles covered by this specification shall be of the following types, as specified in the invitation for bids (see fig. 1):

Type I.—Screw type.
Type II.—Spring-lever type.
Type III.—Chain type.

## 2. APPLICABLE SPECIFICATIONS

**2.1** There are no other specifications applicable to this specification except those referenced in section 7 by individual departments.

(Copies of Federal specifications and the Federal Specifications Index may be obtained upon application, accompanied by money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington 25, D. C. Prices may be obtained from the Superintendent of Documents.)

## 3. REQUIREMENTS

**3.1 Design.**—The mop handle shall consist of a wooden stick, to which are attached metal fixtures for securely holding a mop. The overall length of the stick and the head shall be not less than 60 or 72 inches, as specified in the invitation for bids.

**3.2 Sticks.**—The wood of the sticks shall be thoroughly seasoned close- and straight-grained hardwood. Sticks shall be straight and uniform in diameter, smoothly finished, and rounded at the hand end. The diameter of the sticks shall be 1⅛ inches. Each stick shall have a hole approximately 3/16 inch in diameter about 2 to 3 inches from the hand end completely through the stick.

**3.2.1** When specified in the invitation for bids, Douglas fir or yellow pine with smooth finish and coated with transparent varnish or lacquer may be used for the stick.

**3.3 Type I, screw type.**

**3.3.1** *Construction.*—Screw-type mop handles shall consist essentially of a wood stick and metal fixtures for holding a wet-cleaning mop between the head and bail of the metal fixtures by tightening a wing-nut over a screw-pin.

**3.3.2** *Metal fixtures.*—The metal fixtures for holding the mop shall consist essentially of a bail, a head, and a screw-pin.

**3.3.2.1** *Bail.*—The bail shall be made of steel wire 0.244±0.01 inch in diameter and shall be securely fastened to the stick in an approved manner and strengthened with a steel, a cast-iron, or a malleable-iron ferrule. The inside dimension of the end of the bail shall be 6±⅛ inches provided the bail moves freely in the head without coming out of the lips at the end. When the head is raised to a maximum, there shall be an opening of at least 1½ inches between the end of the bail and the head to provide for the insertion of the mop.

**3.3.2.2** *Head.*—The head shall be of malleable iron or pressed steel, as specified in the invitation for bids. If pressed steel is used, it shall be not less than 0.0245 inch in thickness when used double thickness and 0.0306 inch in thickness when used single thickness. If the head consist of two pieces, they shall be welded together by spot welding at not less than six points. The head may be made of a suitable plastic material having strength equal to the metal head.

**3.3.2.3** *Screw-pin.*—The screw-pin shall be made and threaded to accommodate a ⅜-inch wing nut provided for the adjustment of the head.

**3.3.2.4** *Finish.*—The bail, head, screw-pin, and wing-nut shall be made corrosion-resistant by zinc or other suitable coating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

**3.4 Type II, spring-lever type.**

**3.4.1** *Construction.*—Spring-lever mop handles shall consist essentially of a wood stick and metal fixtures for holding a wet-cleaning mop between the head and bail by means of a spring and lever.

**3.4.2** *Metal-fixtures.*—The metal fixtures for holding the mop shall consist essentially of a bail, a head, and a spring and lever.

**3.4.2.1** *Bail.*—The bail shall be made of steel wire 0.177±0.015 inch in diameter, securely fastened to the lever in an approved manner. The inside dimension of the bail shall be 6½±⅛ inches. When the lever is fully raised there shall be an opening of at least 1¼ inches between the end of the bail and the head for the insertion of the mop.

**3.4.2.2** *Head.*—The head shall be made of malleable iron or pressed steel, as specified in the invitation for bids. If pressed steel is used, it shall be not less than 0.0245 inch in thickness when used double thickness, and 0.0306 inch in thickness when used single thickness. The head shall be securely fastened to the stick by a nail, screw, staple or other equally secure means. The head may be made of a suitable plastic material having strength equal to the metal head.

**3.4.2.3** *Spring and lever.*

**3.4.2.3.1** *Spring.*—The spring shall be made of spring steel wire 0.135±0.008 inch in diameter. It shall be so constructed that sufficient pressure will be produced to maintain the mop in a secure position.

**3.4.2.3.2** *Lever.*—The lever shall be made of pressed steel. Steel 0.049±0.004 inch in thickness shall be used if the lever is embossed for added strength; steel 0.061±0.004 inch in thickness shall be used if the lever is plain. Where no collar is provided, the lever shall be securely attached to the lower turn of the spring so as not to become detached.

**3.4.2.4** *Finish.*—The head, including nail, screw or staple, lever, spring, collar, and bail shall be made corrosion resistant with either an electroplated zinc coating or cadmium plating. Thickness of either coating shall be not less than 0.0005 inch except at points which are difficult to plate, in which case a minimum thickness of 0.00025 inch will be permitted.

**3.5 Type III, chain type.**

**3.5.1** *Construction.*—Chain-type mop handles shall consist essentially of a wood stick and metal fixtures for holding the mop.

**3.5.2** *Metal fixtures.*—The metal fixtures for holding the mop shall consist essentially of a head, a chain, a lever handle, a retention ring, a ferrule and retention tacks.

**3.5.2.1** *Head.*—The head shall be made of zinc-plated, cold-rolled steel, not less than 0.048 inch in thickness, No. 1 round edge, and shall be approximately 15 inches long. The head shall contain a channel approximately ⅝ inch wide, except at the ends where it joins the handle. The head shall be not less than ¾ inch wide. The head shall be triangular in shape and the top of the triangle where the mop is placed shall be approximately 6 inches long. There shall be four holes on one side of the head approximately 1⅝ inches from the top of the triangle and approximately ⅛ inch apart for optional placement of the chain hook and two double holes on the opposite side of the channel approximately ⅞ inch from the top of the triangle and approximately ⅛ inch apart for optional placement of the lever handle. An iron rivet, approximately 5/32 by approximately 1⅜ inches, shall secure the head to the handle.

**3.5.2.2** *Chain.*—The chain shall be electro-galvanized No. 45 steel sash. There shall be not less than 17 links and the over-all length of the chain from the end of lever where the chain is attached, to the end of the hook where the chain is attached, shall be approximately 9½ inches. A double-prong hook approximately 1⅜ inches in over-all length and made of electro-galvanized wire approximately 0.080 inch in diameter shall be secured to one end of the chain.

**3.5.2.3** *Lever handle.*—The lever handle shall be made of zinc-plated cold-rolled steel not less than 0.048 inch in thickness and shall be not less than 5¼ inches long. The handle shall be channeled about 3 inches and one end shall be curved to fit the handle. The chain shall be joined to the lever handle with a No. 4 tinners rivet.

**3.5.2.4** *Retention ring.*—The retention ring shall be made of zinc-plated cold-rolled steel not less than 0.031 inch in thickness and shall be



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

approximately 1¼ inches in diameter and approximately 5/16 inch wide.

**3.5.2.5** *Ferrule.*—The ferrule shall be made of zinc-plated cold-rolled steel not less than 0.031 inch in thickness and shall be approximately 7/16 inch deep and approximately ¾ inch in diameter. The top of the ferrule shall be inwardly curved or depressed to conform with the steel head.

**3.5.2.6** *Retention tacks.*—The retention tacks, or nails, shall be the standard No. 3 size upholstery tacks, brass plated.

**3.6 Workmanship.**—Metal portions of the handles shall be well secured and free from burs or roughened spots. The handles shall be free from defects which affect their appearance or which may impair their serviceability.

## 4. SAMPLING AND INSPECTION PROCEDURES

**4.1 Sampling.**—Unless otherwise specified, two handles of each type shall be taken from each lot of 100 handles or fraction thereof delivered.

**4.2 Inspection.**—The sample handles shall be inspected for type, straightness and smoothness of the sticks, dimensions of the sticks, construction, dimensions of the metal fixtures, thickness of finish coating, and workmanship.

## 5. PREPARATION FOR DELIVERY

**5.1 Packaging.**—Unless otherwise specified. commercial packaging will be acceptable.

**5.2 Packing.**—The mop handles shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards of transportation.

**5.3 Marking.**—Unless otherwise specified, shipping containers shall be marked with the name and type of the item as defined by the contract or order under which the shipment is made, the quantity contained therein, the name of the contractor, and the number of the contract or order.

## 6. NOTES

**6.1 Ordering data.**—Purchasers should specify the type and length of mop handle required and should exercise any desired options offered herein. (See 1.1, 3.1, 3.2.1, 3.3.2.2, 3.4.2.2, 4.1, 5.1, 5.3, 7.3.2, and 7.3.5.)

**Patent notice.**—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

## 7. DEPARTMENTAL REQUIREMENTS

**7.1** The following specifications and other publications, of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments.

**7.2 Army.**

**7.2.1** *Applicable specifications.*

*Federal Specifications:*

NN–B–601—Boxes; Wood-Cleated-Plywood, for Domestic Shipment.

NN–B–621—Boxes; Wood, Nailed and Lock-Corner.

NN–B–631—Boxes; Wood, Wirebound, for Domestic Shipment.

LLL–B–631—Boxes; Fiber, Corrugated, for Domestic Shipment.

LLL–B–636—Boxes; Fiber, Solid, for Domestic Shipment.

*Military Specifications:*

JAN–P–105—Packaging and Packing for Overseas Shipment—Boxes, Wood, Cleated, Plywood.

JAN–P–106—Packaging and Packing for Overseas Shipment—Boxes; Wood, Nailed.

JAN–P–132—Packaging and Packing for Overseas Shipment—Crates; Unsheathed, Wood; Nailed.

*U. S. Army Specification:*

100–2—Standard Specification for Marking Shipments by Contractors.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

(Copies of specifications required for Army purchases may be obtained from the procuring agency. Both the title and identifying symbol or number should be stipulated when requesting copies.)

**7.2.2** *Packaging.*—Not applicable.

**7.2.3** *Packing.*

**7.2.3.1** *For domestic shipment.*—Thirty-six handles shall be packed, by placing one-half of the heads at each end of box, in one of the following shipping containers:

**7.2.3.1.1** *Boxes, fiberboard.*—Corrugated or solid fiberboard containers constructed in accordance with the requirements of Federal Specifications LLL–B–631 and LLL–B–636, respectively, style OLC. Bursting strength of fiberboard shall be not less than 275 pounds per square inch. Manufacturer's joint shall be stitched. Each inside end of the box shall be provided with a scored and slotted tray having 3-inch-wide flanges all around, constructed of the same material as used in the box. All flaps of the fiberboard box shall be securely sealed with a good quality adhesive applied throughout the entire area of contact between the flaps. The top and bottom flanges of the tray shall be glued to the box.

Three flat steel straps not less than 3/8 inch by 0.015 inch shall be applied around the top, sides, and bottom of each box. One strap shall be positioned approximately 6 inches from each end; the third strap centered equidistant from the end straps.

**7.2.3.1.2** *Nailed wood box.*—Nailed wood boxes constructed, sealed, and strapped in accordance with the requirements for style 4 of Federal Specification NN–B–621, except that the minimum thickness for sides, top, and bottom shall be not less than 3/8 inch, ends 3/4 inch, cleats 3/4 inch by 2 1/4 inches.

**7.2.3.1.3** *Nailed wood crate.*—Nailed wood crates constructed, sealed, and strapped in accordance with the requirements for style C of Military Specification JAN–P–132, except that the minimum thickness and width of top and bottom pieces shall be not less than 1/2 inch by 3 5/8 inches, thickness of sides and ends not less than 3/4 inch, cleats not less than 3/4 inch by 3 5/8 inches.

**7.2.3.1.4** *Wood-cleated plywood box.*—Wood-cleated plywood boxes constructed in accordance with the requirements for style B of Federal Specification NN–B–601, except that the minimum thickness of plywood shall be not less than 3/20 inch, cleats 5/8 inch by 1 3/4 inches. Plywood need not be water resistant.

**7.2.3.1.5** *Wood, wirebound box.*—Wood, wirebound boxes constructed in accordance with the requirements for style 2 or 2A of Federal Specification NN–B–631, style F battens; the minimum thickness for sides, top, and bottom shall be not less than 1/6 inch group IV veneer, ends not less than 1/4 inch resawn group IV lumber.

**7.2.3.2** *For overseas shipment.*—Thirty-six handles shall be packed, by placing one-half of the heads at each end of the box, in one of the following type shipping containers:

**7.2.3.2.1** *Nailed wood box.*—Nailed wood boxes constructed, sealed, and strapped in accordance with the requirements for style 4, type 3 load, of Military Specification JAN–P–106.

**7.2.3.2.2** *Nailed wood crate.*—Nailed wood crates constructed, sealed, and strapped in accordance with the requirements for style C of Military Specification JAN–P–132.

**7.2.3.2.3** *Wood-cleated plywood box.*—Wood-cleated plywood boxes constructed, sealed, and strapped in accordance with the requirements for style B of Military Specification JAN–P–105.

**7.2.4** *Marking.*—Each shipping container shall be marked to comply with the requirements of Army Specification 100–2, except that service corner color markings shall not be required on domestic shipping containers.

**7.3 Navy.**

**7.3.1** *Applicable specifications and other publications.*

*Federal Specifications:*

T–T–871—Twine; Cotton, Wrapping.
T–T–901—Twine; Hemp.
T–T–911—Twine; Jute.
NN–B–591—Boxes; Wood-Cleated-Fiberboard.
NN–B–601—Boxes; Wood-Cleated-Plywood, for Domestic Shipment.
NN–B–621—Boxes; Wood, Nailed and Lock-Corner.
NN–B–631—Boxes; Wood, Wirebound, for Domestic Shipment.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

LLL–B–631—Boxes; Fiber, Corrugated (for Domestic Shipment).
LLL–B–636—Boxes; Fiber, Solid (for Domestic Shipment).

*Military Specifications:*

JAN–P–105—Packaging and Packing for Overseas Shipment—Boxes, Wood, Cleated, Plywood.
JAN–P–106—Packaging and Packing for Overseas Shipment—Boxes; Wood, Nailed.
JAN–B–107—Boxes, Wood, Wirebound (Overseas Type).
JAN–P–108—Packaging and Packing for Overseas Shipment—Boxes, Fiberboard (V-Board and W-Board), Exterior and Interior.
JAN–P–125—Packaging and Packing for Overseas Shipment—Barrier-Materials, Waterproof, Flexible.
JAN–P–138—Packaging and Packing for Overseas Shipment — Boxes, Wood, Fiberboard-Lined.
JAN–P–140—Packaging and Packing for Overseas Shipment—Adhesives, Water-Resistant, Case-Liner.

*Navy Department Specification:*

General Specifications for Inspection of Material.

*Bureau of Supplies and Accounts Publication:*

Navy Shipment Marking Handbook.

(Copies of Federal and Military specifications required for Navy purchases, Navy Department specifications, and the Navy Shipment Marking Handbook may be obtained without cost upon application to the Bureau of Supplies and Accounts, Navy Department, Washington 25, D. C., except that Naval activities should make application to the Commanding Officer, Naval Supply Center, Norfolk 11, Va. Both the title and identifying symbol or number should be stipulated when requesting copies of specifications.)

**7.3.2** *Packaging.*—Unless otherwise specified, mop handles shall be bundled in units of 12. They shall be securely tied together with a 24-ply cotton twine conforming to the requirements of Federal Specification T–T–871, or hemp or jute twine having a minimum breaking strength of 20 pounds and conforming to the requirements of Federal Specifications T–T–901 and T–T–911, respectively.

**7.3.3** *Packing.*

**7.3.3.1** *For domestic shipment.*—Three bundles or 36 mop handles, packaged as described in 7.3.2, shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose except that when wood-cleated fiberboard boxes, wood-cleated plywood boxes, nailed wood boxes, wirebound wood boxes, corrugated fiber boxes, or solid fiber boxes are used, they shall conform to the requirements of Federal Specifications NN–B–591, NN–B–601, NN–B–621, NN–B–631, LLL–B–631, and LLL–B–636, respectively. The weight of wood boxes and contents shall not exceed approximately 200 pounds except where the weight of an individual item exceeds this amount; and of fiberboard boxes and contents, approximately 90 pounds.

**7.3.3.2** *For overseas shipment.*—Three bundles or 36 mop handles, packaged as described in 7.3.2, shall be packed in cleated plywood boxes, nailed wood boxes, wirebound wood boxes, fiberboard boxes, or fiberboard-lined wood boxes, conforming to the requirements of Military Specifications JAN–P–105, JAN–P–106, JAN–B–107, JAN–P–108, and JAN–P–138, respectively. The weight of wood boxes and contents shall not exceed approximately 200 pounds except where the weight of an individual item exceeds this amount; and of fiberboard boxes and contents, approximately 70 pounds.

**7.3.3.2.1** The contents shall be enclosed within a sealed waterproof bag, or its equivalent, made from material conforming to the requirements of Military Specification JAN–P–125, for case liner material. Seams and closures shall be sealed with adhesive conforming to the requirements of Specification JAN–P–140.

**7.3.4** *Marking.*

**7.3.4.1** *Bundles.*—Each bundle shall be durably and legibly marked with the following information:

Material description
Supplier or manufacturer
Contract or order No.
Navy stock No.
Fed. Spec. NN–H–101
Quantity contained
Date packed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

**7.3.4.2** *Shipping containers.*—In addition to any special marking required by the contract or order, marking of shipping containers shall be in accordance with the requirements of the Navy Shipment Marking Handbook.

**7.3.5** *Ordering data.*—Requests, requisitions, schedules, and contracts or orders should specify whether the subject commodity is to be packed and shipping containers marked for domestic or overseas shipment (see 7.3.3 and 7.3.4).

NAVY INTEREST: *MC* Sh S Y

**7.4 Air Force.**—Each shipping container shall be marked in accordance with the requirements of U. S. Army Specification 94–40645, Marking; Exterior, Domestic and Export Shipment, by Contractors.

(Copies of specifications required for Air Force purchases may be obtained from the Commanding General, Air Matériel Command, Wright-Patterson Air Force Base, Dayton 1, Ohio.)

**7.4.1** *Identification marking.*—Each mop handle shall be marked in a plain and permanent manner with the following:

Fed. Spec. NN–H–101a
Stock No.
Manufacturer's name or trade-mark
U. S. Property


**7.4.2** *Shipping container marking.*—Each shipping container shall be marked with the following information:

Handles, Mop
Fed. Spec. NN–H–101
Quantity
Type
Manufacturer's name or trade-mark
Stock No.


***This specification is a part of Section IV, Part 5, of the Federal Standard Stock Catalog.***




Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

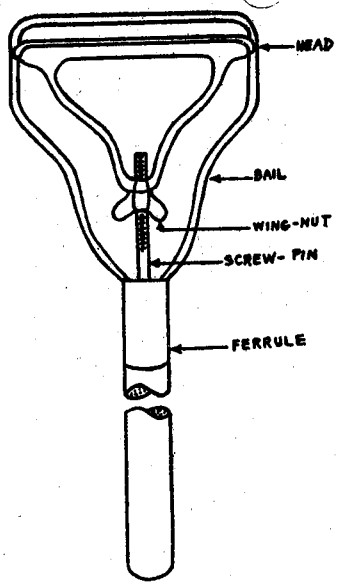


TYPE I.—Screw type.

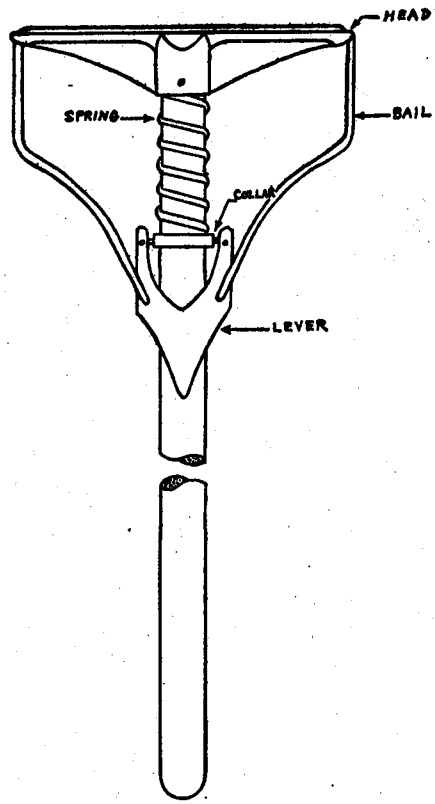


TYPE II.—Spring-lever type.

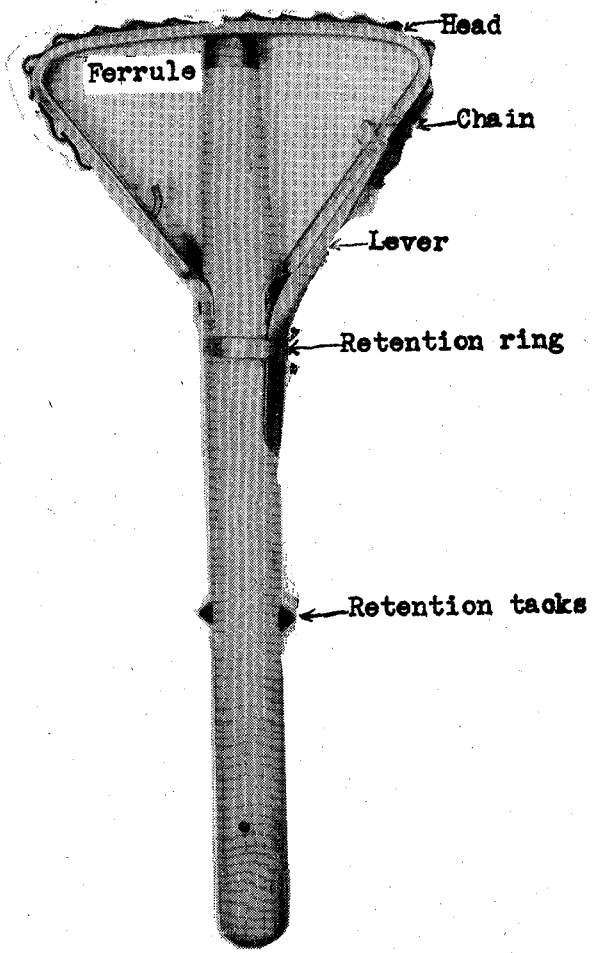


TYPE III.—Chain type.

FIGURE I.—Mop handles.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.