00-R-421B
AMENDMENT-2
August 1, 1980
SUPERSEDING
INT. AMENDMENT-1 (NAVY-SH)
June 25, 1979

FEDERAL SPECIFICATION

RIVETER, PNEUMATIC, JAM AND HAMMER; AND HOLDER-ON, PORTABLE

This amendment which forms a part of 00-R-421B, dated June 9, 1976, was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

PAGE 2

2.1, add:

"Federal Standard:

FED-STD-H28 - Screw Thread Standards for Federal Service."

2.2, delete reference to National Bureau of Standards Handbook H28 in its entirety.

PAGE 3

3.3.2: Delete and substitute:

"3.3.2 Materials. The materials used in the construction of all components shall be capable of completing the examinations and tests specified herein. Reclaimed materials shall be used to the maximum extent possible without jeopardizing the quality of the materials. All components shall be new and unused. Repaired or reconditioned components shall not be acceptable. Cadmium plating shall not be permitted."

3.4, last line: Delete "NBS H28", and substitute "FED-STD-H28."

3.6, last line: Delete "and maximum no load speed."

Figure 1, title: Delete and substitute:

"Figure 1. Type I, structural (hot rivets) riveting hammer, offset, open style handle."

3.7.1, first sentence: Delete and substitute:

"3.7.1 Handle. The handle shall be of the offset, open or closed style, as specified (see 6.2)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

3.7.2: Delete and substitute:

"3.7.2 Throttle. A throttle shall be provided for controlling and regulating air supply to tool. Throttle shall automatically and positively shut off air supply to tool when released. Air tightness shall be tested in accordance with 4.6.4 and conform to maximum leakage requirement specified for closed position. Throttle shall be of the conventional outside lever type similar to figure 1."

PAGE 5

Table II: Delete and substitute:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

"Table II. Type II, aircraft riveting hammers.

Size number of hammer	Capacity[1/] rivet size, inch	Weight[2/] with inline handle, pounds (max)	Weight[2/] with steel pistol grip handle, pounds (max)	Weight[2/] with aluminum offset handle, pounds (max)	Length with offset handle, inches (max)	Length with inline handle, inches (max)	Length with pistol grip handle, inches (max)	Piston		Nozzle[3/] inside diameter, inch	Air consumption, scfm (max)	Impact frequency blows/min (min-max)	Shank size
								Stroke, inches (approx)	Diameter, inch (approx)				
Class 1 - Fast hitting													
1	5/32	3	4	3	6-1/2	6-1/2	9	1 to 2	5/8	0.405	16	3600 to 5500	Fig. 4A
Class 2 - Slow hitting													
2	1/8	3-1/4	5	3-1/4	7-1/2	7-1/2	10-1/4	2 to 3	1/2 or 9/16	0.405	14	2300 to 2900	Fig. 4A
3	3/16	3-3/4	5-1/2	3-3/4	8-1/2	8-1/2	11-1/2	3 to 4	1/2 or 9/16	0.405	15	1500 to 2100	Fig. 4A
4	1/4	4	6	4	9-1/2	9-1/2	12	4 to 5-1/2	1/2 or 9/16	0.405	16	1300 to 1800	Fig. 4A
5	3/8	6	8	6	12	12	15	5-1/2 to 7	3/4	0.501	22	800 to 1500	Fig. 4B

1/For aluminum, dural, and soft iron cold rivets.
2/The maximum weight allowed is exclusive of rivet set.
3/Tolerance plus or minus 0.001."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

Figure 3: Delete and substitute:

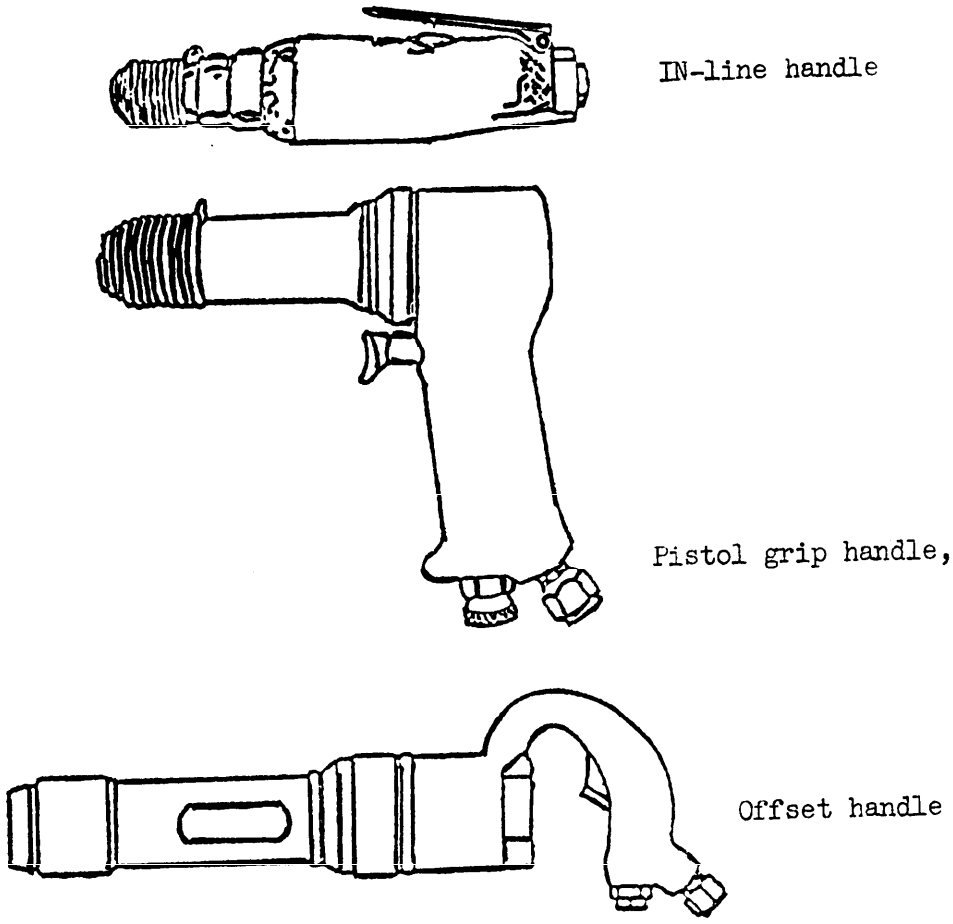


Figure 3. Type II, aircraft riveting hammers."

3.8.1, first sentence: Delete and substitute:

"3.8.1 Handle. The handle shall be of the pistol grip aluminum offset (aluminum) or inline style."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

3.8.2: Delete and substitute:

"3.8.2 Throttle. Throttle shall conform to the requirements of 3.7.2, except that the throttle shall be of the trigger or lever style."

PAGE 9

3.11: Delete and substitute:

"3.11 Sound pressure levels. The sound pressure levels measured at an unobstructed distance of one meter shall not exceed 103 decibels (dB) for types I, II (class 1 only), III, IV, and 95 dBA for type II (class 2 only)."

PAGE 10

4.3, second line: Delete "Naval Ship Engineering Center", and substitute "Naval Sea Systems Command".

PAGE 13

6.3, third sentence: Delete and substitute: "The activity responsible for the Qualified Products List is the Naval Sea Systems Command, SEA 3112, Department of the Navy, Washington, DC 20362, and information pertaining to qualification of products may be obtained from that activity."

Military custodians:
Army - GL
Navy - SH
Air Force - 99

User activities:
Army - ME
Navy - MC, CG

Preparing activity:
Navy - SH
(Project 5130-0288)

Civil agency coordinating activity:
GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.