
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, ELECTROLYTIC (NONSOLID ELECTROLYTE), TANTALUM, (POLARIZED, SINTERED SLUG) - 85°C (VOLTAGE DERATED TO 125°C), STYLES CL17 AND CL18


INACTIVE FOR NEW EQUIPMENT DESIGN AFTER DATE OF THIS SPECIFICATION; USE MIL-C-39006/20

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-3965.


This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

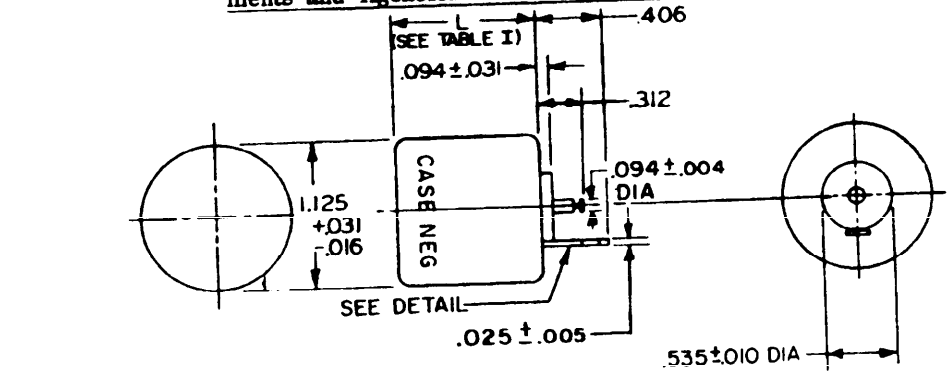


STYLE CL17

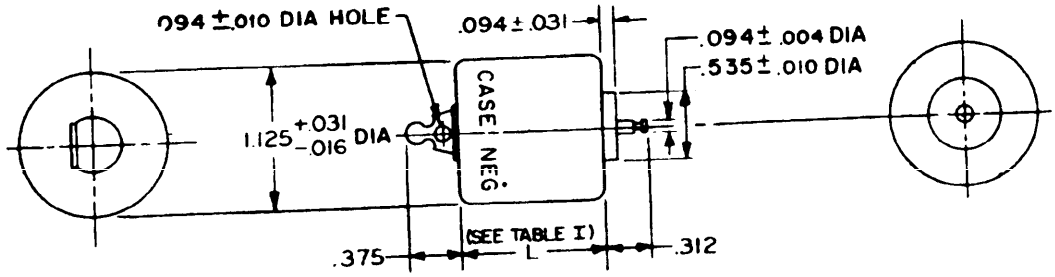

STYLE CL18



DETAIL OF CL17
SOLDER-LUG TERMINAL



CASE
CIRCUIT DIAGRAM

INCHES	MM	INCHES	MM
.004	.10	.183	4.65
.005	.13	.312	7.92
.010	.25	.375	9.53
.016	.41	.406	10.31
.025	.64	.535	13.59
.031	.79	1.125	28.58
.094	2.39		

NOTES:
1. All dimensions in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.062 (1.57 mm).

FIGURE 1. Styles CL17 and CL18 capacitors.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:02Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Type designation 1/	Voltage			Capacitance	Cap. tolerance	Power factor (max)	DC leakage (max)			Impedance (max)	Cap. change (-55°C)	Dimension L ± .062(1.57)
	Rated (+85°C)	Derated (+125°C)	Surge (+85°C)				+25°C	+85°C	+125°C			
	volts, dc	volts, dc	volts, dc	µF		%	µA	µA	µA	ohms	%	inches
CL1-BH371-PG	30	26	34.5	370	M, T	39	18	125	180	15	-65	.600(15.24)
CL1-BH651-PG	30	26	34.5	650	M, T	60	21	145	210	15	-85	1.100(27.94)
CL1-BH132-PG	30	26	34.5	1300	M, T	83	27	190	270	10	-85	1.100(27.94)
CL1-BK201-PG	60	52	69.0	200	M, T	22	19	135	190	30	-50	.600(15.24)
CL1-BK351-PG	60	52	69.0	350	M, T	37	22	155	220	25	-70	1.100(27.94)
CL1-BK701-PG	60	52	69.0	700	M, T	62	29	200	290	15	-70	1.100(27.94)
CL1-BM121-PG	90	78	103.0	120	M, T	13	19	135	190	40	-40	.600(15.24)
CL1-BM221-PG	90	78	103.0	220	M, T	24	21	145	210	30	-60	1.100(27.94)
CL1-BM451-PG	90	78	103.0	450	M, T	45	29	195	290	35	-60	1.100(27.94)
CL1-BR420-PG	180	155	207.0	42	M, T	16	17	120	170	75	-40	.976(24.79)
CL1-BR600-PG	180	155	207.0	60	M, T	13	19	135	190	60	-40	.976(24.79)
CL1-BR111-PG	180	155	207.0	110	M, T	24	21	145	210	60	-60	1.938(49.23)
CL1-BR231-PG	180	155	207.0	230	M, T	46	29	200	290	50	-60	1.938(49.23)
CL1-BS280-PG	270	235	310.0	28	M, T	16	19	120	190	80	-40	1.350(34.29)
CL1-BS400-PG	270	235	310.0	40	M, T	22	19	135	190	100	-40	1.350(34.29)
CL1-BS750-PG	270	235	310.0	75	M, T	24	21	145	210	90	-60	2.812(71.42)
CL1-BS151-PG	270	235	310.0	150	M, T	45	28	195	280	75	-60	2.812(71.42)
CL1-BT220-PG	360	310	414.0	22	M, T	16	18	125	180	100	-40	1.705(43.31)
CL1-BT300-PG	360	310	414.0	30	M, T	22	19	135	190	120	-40	1.705(43.31)
CL1-BU170-PG	450	390	518.0	17	M, T	16	18	125	180	130	-40	2.080(52.83)
CL1-BU250-PG	450	390	518.0	25	M, T	23	19	135	190	150	-40	2.080(52.83)
CL1-BV140-PG	540	470	621.0	14	M, T	16	17	120	170	160	-40	2.435(61.85)
CL1-BV200-PG	540	470	621.0	20	M, T	22	19	135	190	170	-40	2.435(61.85)
CL1-BW120-PG	630	545	724.0	12	M, T	16	17	120	170	180	-40	2.810(71.37)
CL1-BW180-PG	630	545	724.0	18	M, T	23	19	135	190	200	-40	2.810(71.37)

1/ Complete type designation will include additional symbols to indicate style and capacitance tolerance.

Source: https://assist.dla.mil -- Downloaded: 20260-17T03:02Z
Check the source to verify that this is the current version before use.

TABLE II. Cross-reference data.

FROM Type designation 1/ MIL-C-3965/19E	TO Part number 2/ MIL-C-39006/20	FROM Type designation 1/ MIL-C-3965/19E	TO Part number 2/ MIL-C-39006/20
	M39006/20-		M39006/20-
CL1-BH371MPG	1000	CL1-BR231TPG	1025
CL1-BH371TPG	1001	CL1-BS280MPG	1026
CL1-BH651MPG	1002	CL1-BS280TPG	1027
CL1-BH651TPG	1003	CL1-BS400MPG	1028
CL1-BH132MPG	1004	CL1-BS400TPG	1029
CL1-BH132TPG	1005	CL1-BS750MPG	1030
CL1-BK201MPG	1006	CL1-BS750TPG	1031
CL1-BK201TPG	1007	CL1-BS151MPG	1032
CL1-BK351MPG	1008	CL1-BS151TPG	1033
CL1-BK351TPG	1009	CL1-BT220MPG	1034
CL1-BK701MPG	1010	CL1-BT220TPG	1035
CL1-BK701TPG	1011	CL1-BT300MPG	1036
CL1-BM121MPG	1012	CL1-BT300TPG	1037
CL1-BM121TPG	1013	CL1-BU170MPG	1038
CL1-BM221MPG	1014	CL1-BU170TPG	1039
CL1-BM221TPG	1015	CL1-BU250MPG	1040
CL1-BM451MPG	1016	CL1-BU250TPG	1041
CL1-BM451TPG	1017	CL1-BV140MPG	1042
CL1-BR420MPG	1018	CL1-BV140TPG	1043
CL1-BR420TPG	1019	CL1-BV200MPG	1044
CL1-BR600MPG	1020	CL1-BV200TPG	1045
CL1-BR600TPG	1021	CL1-BW120MPG	1046
CL1-BR111MPG	1022	CL1-BW120TPG	1047
CL1-BR111TPG	1023	CL1-BW180MPG	1048
CL1-BR231MPG	1024	CL1-BW180TPG	1049

1/ Complete type designation will include an additional symbol to indicate style.
2/ Part number referenced will replace styles CL17 and CL18.

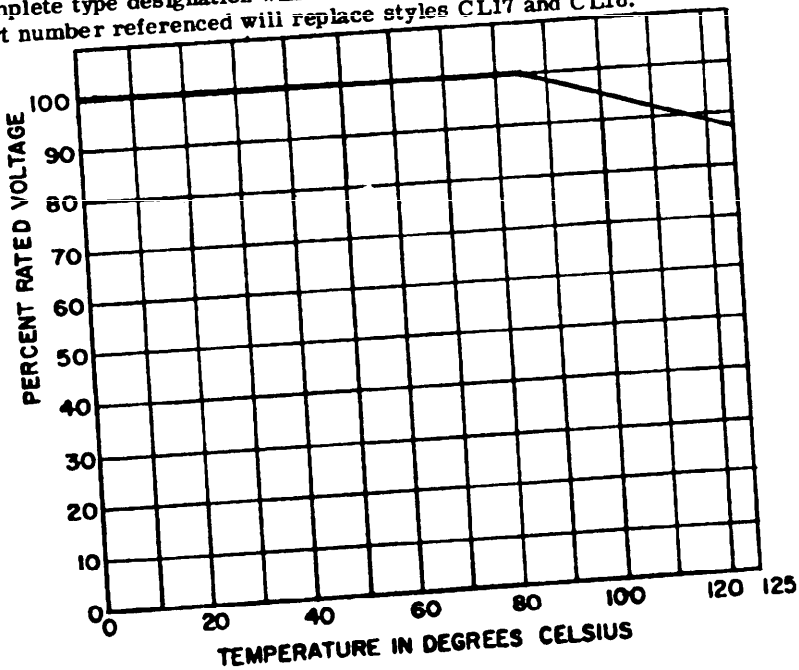


FIGURE 2. Voltage derating with temperature.

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration - See figure 1.
Case type - Tubular, uninsulated.
Seal type - Hermetic (symbol G).
Terminals - Solder-lug.
Rated temperature - -55° C to +85° C, voltage derated to +125° C (see figure 2).
Rated voltage - See table I.
Capacitance (cap) (nom) - See table I.
Capacitance tolerance - Symbol M (±20%) or T (+50, -15%).

DC leakage (DCL) (max) (at +25° C):
See table I.

Dissipation factor (DF) (max):
See table I.

Seal: In accordance with MIL-C-3965.

Dielectric withstanding voltage (DWV):
Sleeving to case (min) - Not applicable.
Terminal to case - Not applicable.

Insulation resistance:
Sleeving to case (min): Not applicable.
Terminal to case - Not applicable.

Temperature cycling:
DCL (max) - 125% of 25° C value of table I.
ΔCap - Within ±5% of initial measurement.
DF (max) - 115% of table I value.

Solderability: Not applicable.

Terminal strength:
Pull test - In accordance with MIL-C-3965.
Bend test (if req.) - In accordance with MIL-C-3965.
Torque test - Not applicable.
Wire-lead bend test - Not applicable.
Twist test - Not applicable.

Surge voltage: See table I.

Moisture resistance:
DCL (max) - 125% of 25° C value of table I.
ΔCap - Within ±8% of initial measurement.
DF (max) - 115% of table I value.

Low temperature (storage):
DCL (max) - See table I (25° C).
ΔCap - Within ±5% of initial measurement.
DF (max) - See table I.

Stability at low and high temperature:
Step 1 (+25° C):
DCL (max) - See table I.
Cap - Within tolerance of table I value.
DF (max) - See table I.
Step 2 (-55° C):
Impedance - See table I.
ΔCap (max) - Within percent shown in table I of step 1 value.
Step 3 (+25° C):
DCL (max) - See table I.
ΔCap - Within ±5% of step 1 value.
DF (max) - See table I.
Step 4 (+85° C):
DCL (max) - See table I.
ΔCap (max) - +20% of step 1 value.
DF (max) - See table I.
Step 5 (+125° C):
DCL (max) - See table I.
ΔCap (max) - +25% of step 1 value.
DF (max) - See table I.
Step 6 (+25° C):
DCL (max) - See table I.
ΔCap - Within ±5% of initial measurement.
DF (max) - See table I.

Reverse voltage: Not applicable.

Life at +85° C:
Qualification (2, 000 hours):
DCL (max) - See table I (25° C).
ΔCap - Within ±20% of initial measurement.
DF (max) - See table I.
Quality conformance:
240 hours:
DCL (max) - See table I (25° C).
ΔCap - Within ±10% of initial measurement.
DF (max) - See table I.
1,760 hours:
DCL (max) - See table I (25° C).
ΔCap - Within ±20% of initial measurement.
DF (max) - See table I.

Barometric pressure:
Test voltage - Rated voltage for 30 to 360 v units; 500 vdc for 540 and 630 v.

Life at +125° C:
DCL (max) - See table I (25° C).
ΔCap - Within ±20% of initial measurement.
DF (max) - 150% of initial requirement.

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:02Z
Check the source to verify that this is the current version before use.

DWV and IR - Not applicable.

Marking: Capacitors shall be marked as shown in the following example:
Example:
CL17BH371MPG - Type designation.
12345 7015 - Source and date code.
370 μF 30 vdc - Capacitance and rated voltage (at 85° C).

Polarity: Capacitors shall be marked "CASE NEG" on the negative end (see figure 1).

Voltage groups (85° C rated voltage):
I - - - - - - - - - - - 30 to 90 v, incl.
II - - - - - - - - - - - 180 to 360 v, incl.
III - - - - - - - - - - - 450 to 630 v, incl.

NOTE: The capacitors covered by this specification sheet are substitutable for those covered by MIL-C-3965/19D. See table II.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - EL, MU
Navy - EC, SH
Air Force - 11, 17, 80
DSA - ES

User activities:
Army -
Navy - AS, MC, OS
Air Force - 19

Preparing activity:
Air Force - 80

Agent:
DSA - ES

(Project 5910-1001-11)

Source: https://assist.dla.mil -- Downloaded: 202610-17T03:02Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity (as indicated on reverse hereof).

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD, FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:02Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

SMAMA (MMSS)
McClellan AFB CA 95652

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:02Z
Check the source to verify that this is the current version before use.