INCH-POUND

MIL-F-3967E
31 October 1990
SUPERSEDING
MIL-F-3967D
20 November 1980

MILITARY SPECIFICATION

FORMING MACHINES, SHEET METAL, ROTARY, COMBINATION FLOOR MOUNTING, MOTOR DRIVEN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

1.1 Scope. This specification covers floor mounting, electric motor driven, rotary, combination crimping and beading, forming machines for performing beading, burring, crimping, flanging, slitting and circle cutting, turning and wiring operations on sheet metal, with equipment and accessories specified herein.

1.2 Classification. The forming machines covered by this specification shall be of the following types and sizes. The type and size to be furnished shall be as specified (see 3.5 and 6.2).

Type I - Manually operated.

Size 7 - 7 inch - throat depth
Size 12 - 12 inch - throat depth
Size 20 - 20 inch - throat depth

Type II - Pneumatically operated.

Size 7 - 7 inch - throat depth
Size 12 - 12 inch - throat depth
Size 20 - 20 inch - throat depth

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, 2163 Airways Blvd. Memphis, Tennessee 38114-5051, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3441
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-M-18058 - Machinery, Metal and Woodworking, Packaging of.

STANDARDS

FEDERAL

FED-STD-H28 - Screw Thread Standards for Federal Services.

MILITARY

MIL-STD-461 - Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference.

MIL-STD-462 - Electromagnetic Interference Characteristics, Measurement of.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

CODE OF FEDERAL REGULATIONS (CFR)

U.S. DEPARTMENT OF LABOR, OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

29 CFR 1910 - Occupational Safety and Health Standards.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402-0001.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contract activity.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI B11.12 - Roll-Forming and Roll-Bending Machines - Safety Requirements for the Construction, Care, and Use (DOD adopted).

(Application for copies should be addressed to the American National Standards Institute, ATTN: Sales Dept., 1430 Broadway, New York, NY 10018-3363).

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 79 - Electrical Standard for Industrial Machinery (DOD adopted).

(Application for copies should be addressed to the National Fire Protection Association, Batterymarch Park, Quincy, MA 02269-9101.)

NATIONAL FLUID POWER ASSOCIATION, INC. (NFPA)

NFPA/T2.251M - Pneumatic Fluid Power - Systems Standard for Industrial Machinery.

(Application for copies should be addressed to the National Fluid Power Association, Inc., 3333 N. Mayfair Road, Milwaukee, WI 53222-3291.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), one complete forming machine shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

3.2 Design. The machine shall be new (not a prototype) and one of the manufacturer's current production models capable of operations in accordance with the requirements herein. The machine shall include all components, parts, and features necessary to meet the performance requirements specified herein. All parts subject to wear, breakage, or distortion shall be readily accessible for adjustment, replacement, or repair. The machine shall be capable of forming metal through the application of compression forces on the metal, when it is driven between the forming rolls, in accordance with the requirements herein. The machine shall consist basically of "C" type frame with an adjustable upper roll for the application of pressure to the workpiece, and a stationary lower forming roll, that does not require adjustment.

3.2.1 Measuring and indicating device calibration. Measuring and indicating devices shall be graduated in inch-pound (see 6.5.1), metric (see 6.5.2), or dual (inch-pound and metric) units as specified by the procuring activity (see 6.2). Regardless of the measurement system used, all measuring and indicating devices on the machine shall be graduated in the same system.

3.2.2 Reclaimed materials. The machine may contain reclaimed materials to the maximum extent possible provided such materials will not jeopardize the intended use, performance, or design life of the machine. Reclaimed materials shall have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used, rebuilt, or remanufactured end products are allowed under this specification.

3.2.3 Energy efficiency. The machine and its components that directly consume energy in normal operation shall be designed and constructed for energy efficiency in accordance with the developments available within the industry.

3.2.4 Controls. All mechanical, electrical, and pneumatic operating controls shall be located convenient to the operator's work station(s). The machine shall have both a remote foot control and hand operated control for reversing roll direction.

3.2.5 Safety and health requirements. All parts, components, mechanisms, and assemblies furnished on the machine, whether or not specifically required herein, shall conform with all requirements of OSHA 29 CFR 1910 and ANSI B11.12. If a conflict arises between OSHA 29 CFR 1910 and ANSI B11.12, OSHA 29 CFR 1910 shall apply. Additional safety and health requirements shall be as specified (see 6.2). Covers, guards, or other safety devices normally furnished as standard on the manufacturer's commercial machine supplied to the commercial market shall be provided for the point of operation and all other parts of the machine that present safety hazards. Additional guarding dependent on workpiece size and configuration shall be provided when specified and fully described by the procuring activity (see 6.2).

3.2.6 Mercury restriction. The machine shall not contain mercury or mercury compounds nor be exposed to free mercury during manufacture.

3.2.7 Asbestos restriction. Asbestos and materials containing asbestos shall not be used on or in the machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

3.2.8 Environmental protection. During the manufacture, operation, service, transportation, or storage of the machine, and its components materials hazardous to the ecological system as prohibited by federal, state, or local statutes in effect on the date of the contract shall not be used or emitted.

3.2.9 Lubrication. Means shall be provided to ensure lubrication for all moving parts. Recirculating lubrication systems shall include a cleanable or replaceable filter. Each lubricant reservoir shall have means for determining fluid level. All oil holes, grease fittings, and filler caps shall be readily accessible.

3.2.10 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. All parts shall be manufactured to such standards as will permit replacement or adjustment without modification of parts or machine.

3.3 Construction. The machine shall be constructed of parts which are new, without defects, and free of repairs. The structure shall withstand all forces encountered during operation of the machine to its maximum rating and capacity without permanent distortion or failure.

3.3.1 Castings and forgings. All castings and forgings shall be free of defects, scale, and mismatching. No processes such as welding, peening, plugging, or filling with solder or paste shall be used for reclaiming any defective part. Such processes may be used only for enhancing surface finish and appearance.

3.3.2 Fastening devices. All fasteners shall be installed to prevent change of tightness. Fastening devices subject to removal or adjustment shall not be permanently installed.

3.3.3 Surfaces. All surfaces shall be clean and free of harmful or extraneous materials. All edges shall be either rounded or beveled unless sharpness is required to perform a necessary function. Except as otherwise specified herein, the condition and finish of all surfaces shall be in accordance with the manufacturer's commercial practice.

3.3.4 Welding, brazing, or soldering. Welding, brazing, or soldering shall be employed only where specified in the original design. None of these operations shall be employed as a repair measure for any defective part.

3.3.5 Painting. Unless otherwise specified (see 6.2), the machine shall be painted in accordance with the manufacturer's commercial practice and color.

3.3.6 Threads. All threaded parts used on the machine and its related attachments and accessories shall conform to FED-STD-H28 and the applicable "Detailed Standard" section referenced therein.

3.3.7 Gears. All gears shall be constructed from a material suitable for the intended purpose. All drive gears shall have the hardness, surface

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

finish, and toughness that will enable the gear train to transmit full rated torque of the drive motor without gear damage, failure, or premature deterioration and wear.

3.3.8 Electromagnetic interference control. When specified (see 6.2), equipment furnished under this specification shall comply with MIL-STD-461. The equipment and subsystem(s) class and the emission and susceptibility requirements shall be as specified.

3.4 Components. The machine shall consist of not less than a pedestal or base, frame, forming rolls and their drive shafts, roll closing and adjusting mechanisms.

3.4.1 Pedestal or base. The pedestal or base shall be constructed of cast iron or steel and of sufficient size and mass, to rigidly support the mounted components while the machine is operating at its maximum capacity. Not less than three mounting holes shall be provided for mounting the pedestal or base to the floor or a foundation.

3.4.2 Frame. The frame shall be the "C" type and mounted on the pedestal or base, and have provisions to rigidly support the motor, drive mechanism, rolls, and all accessories.

3.4.3 Forming rolls and shafts. The shafts for the forming roll shall be supported by bearings or sleeve type bushings. The direction of rotation of the rolls shall be controlled by an electrical device or switch.

3.4.4 Type I machines (manual). The type I machine shall have an adjusting and closing mechanism, which provides manual adjustments to the upper roll, that includes the complete range for standard rolls furnished with the machine. Means shall be provided to laterally adjust one roll for maintaining alignment of the rolls.

3.4.5. Type II machines (pneumatic). The type II machine opening and closing mechanism shall be pneumatically operated. The pneumatic system shall conform to NFPA/T2.25.1M. The system shall have an air line filter, water trap, and oil mist lubricator, as necessary. The system shall operate on a 90 p.s.i. air supply and include all devices such as pressure regulators, pressure reducers, solenoid valves, and check valves that are necessary to meet the requirements specified herein. Air pressure gauges shall be provided to indicate input air pressure in all lines that are downstream from a pressure control device. The upper roll shall have adjustments to include the complete range for standard rolls furnished with the machine. Means shall be provided to laterally adjust one roll for maintaining alignment of the rolls.

3.4.6 Electrical requirements. The machine shall be wired to conform to NFPA 79. Unless otherwise specified (see 6.2), each machine shall be designed to operate on 3-phase, 60-Hertz (Hz), 230/460-volts. Conversion from one voltage to the other shall be accomplished by the reconnection of existing components. The machine shall be initially wired as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

3.4.6.1 Motors. Motors shall be rated for continuous duty and shall have ball or roller bearings of the sealed and permanently lubricated type. Unless otherwise specified (see 6.2), each motor shall have a dripproof enclosure.

3.4.7 Worklight. When specified (see 6.2), a worklight shall be provided. The light shall have a protective shield, an on-off switch, and shall be adjustable to reflect maximum light on the work area. If a built in lighting system is provided, the adjustable light described above shall not be required.

3.4.8 Hour meter. When specified (see 6.2), the machine shall be equipped with an hour meter. The hour meter shall be installed to display accumulated operating time of the main drive motor. The meter shall be of the nonresetting type and shall have a range of 0 to 9,999 hours in increments of not greater than 1 hour. The meter shall be sealed to prevent the entrance of dust and moisture and shall be mounted to withstand shock and vibration generated by the machine.

3.5 Size and capacity. Unless otherwise specified (see 6.2), the size and capacity of the type I and type II machine shall meet the requirements of table I for the machine specified. Machine size and capacity shall be not less than the stated requirements of the size ordered.

TABLE I - Type I & Type II machines

Sizes and Characteristics.

Characteristics	Size 7	Size 12	Size 20
Throat Depth, inches	7	12	20
Motor horsepower	1/2	1	2
Roll Speed (feet per minute)	40	15	20
Workpiece capacity (mild steel), of forming operations:			
Slitting and Circle Cutting	16 ga	18 ga	10 ga
Crimping	20 ga	18 ga	12 ga
Combined Crimping & Beading	22 ga	18 ga	12 ga
Flanging	18 ga	18 ga	12 ga
Burring	16 ga	18 ga	12 ga
Turning	18 ga	18 ga	12 ga
S. Bead, O.G. Bead & Wiring	18 ga	18 ga	12 ga
Other Standard Operations	18 ga	14 ga	12 ga

NOTE: Requirements are not less than those shown.

3.5.1 Physical size limitations. When specified (see 6.2.), the physical size of the machine shall not exceed the height, width, and length restrictions specified by the procuring activity to ensure the machine will fit in its future operating location.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

3.6 Performance. The machines shall be capable of performing the operations listed in table I on mild steel of the workpiece thickness specified for the size machine required. These operations shall be performed without leaving burrs, wire edges, cracks, or other defects on the workpiece.

3.6.1 Additional performance requirements. Performance features required in addition to, or in lieu of, the requirements herein shall be as specified and fully described (see 6.2).

3.7 Standard equipment. Unless otherwise specified (see 6.2), the following standard equipment shall be furnished with each machine (in addition to any equipment normally provided with the manufacturer's commercial machine).

a. One complete set of tools normally furnished with each machine.

b. One set each of the following rolls complete with any necessary spacing collars, gages, accessories, or special nuts:

Turning rolls
Burring rolls
Wiring rolls
Flanging rolls
Crimping rolls
Ogee bead rolls
Single bead rolls
Slitting rolls

3.8 Optional equipment. Optional equipment shall be furnished as specified and fully described (see 6.2). The optional equipment provided shall be functional without requiring modification of the equipment or machine.

3.9 Repair parts. Required repair parts shall be furnished as specified (see 6.2).

3.10 Marking on instruments, control panels, charts, and plates. All words on the machine including all instruments, control panels, control units, charts, plates, and related attachments shall be in the English language. Characters shall be permanently marked in boldface on a contrasting background. All plates shall be corrosion resistant.

3.10.1 Lubrication plate or chart. When specified (see 6.2), a lubrication plate or chart shall be attached to each machine. If a chart is furnished, it shall be placed in a transparent plastic folder, or permanently sealed between clear plastic sheets. Unless otherwise specified (see 6.2), the information provided on the chart or plate shall be as listed below.

Points of lubricant application
Type of lubricant
Servicing interval
Military or federal specification for each lubricant (if applicable)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

3.10.2 Nameplate. A nameplate shall be securely attached to each machine. Unless otherwise specified (see 6.2), the nameplate shall contain the information listed below.

Nomenclature
Manufacturer's name
Manufacturer's model designation
Manufacturer's serial number
Power input (volts, total amps, phase, frequency)
Amp rating of largest motor
Short circuit/over-current protection rating
Contract number or order number
National stock number or plant equipment code
Date of manufacture

3.11 Workmanship. Workmanship of the machine and its accessories shall meet all requirements specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be performed in accordance with the test conditions specified in 4.7.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

4.4 First article inspection. When a first article inspection is required, it shall be applied to the first article submitted in accordance with 3.1. Unless otherwise specified (see 6.2), first article inspection shall consist of the examination in 4.6, and all tests in 4.7. The machine shall pass the examination and all tests to be accepted.

4.5 Quality conformance inspection. Quality conformance inspection shall be applied to each machine prior to being offered for acceptance under the contract. Unless otherwise specified (see 6.2), quality conformance inspection shall consist of the examination in 4.6, the tests in 4.7, and the inspection in 4.8. The machine shall pass the examination, all tests, and the inspection to be accepted.

4.6 Examination. Each machine shall be examined to determine compliance with all requirements of this specification.

4.7 Tests.

4.7.1 Test conditions. All tests shall be performed in an indoor facility with ambient conditions of 41° to 104° Fahrenheit (F) and 20 to 95 percent relative humidity.

4.7.2 Operational test. Each machine shall be operated at no load for not less than 0.5 hour. Proper operation of all controls, motors, adjusting mechanisms, and accessories shall be verified during the trial period.

4.7.3 Performance test. The machine shall be used to produce two workpieces, with each set of rolls furnished with the machine. Each workpiece shall have not less than 24 inches of formed edge. The workpieces shall be of the gage specified in table I. The finished workpieces shall be free of burrs, cracks, or other defects.

4.7.4 Additional performance tests. Performance tests required in addition to or in lieu of the requirements of 4.7.3 shall be as specified and fully described (see 6.2).

4.7.5 Electromagnetic interference control test. Equipment requiring electromagnetic interference control shall be tested for compliance with 3.3.8 using the procedures given in MIL-STD-462.

4.8 Packaging inspection. Packaging of each item shall be inspected to determine compliance with the requirements of section 5.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-18058.

6. NOTES

6.1 Intended use. Machine covered by this specification are intended for use in sheet metal fabricating shops to perform wiring, turning, slitting, burring, crimping, flanging, and related operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Type and size required (see 1.2 and table I).

c. Issue of DODISS to be cited in the solicitation and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).

d. First article, if required (see 3.1).

e. Specify system of units for measuring and indicating devices (see 3.2.1).

f. Additional safety and health requirements, if required (see 3.2.5).

g. Specify configuration of additional point-of-operation guarding, if required (see 3.2.5).

h. Painting, if different (see 3.3.5).

i. If electromagnetic interference control is required, specify the equipment and subsystem class and the emission and susceptibility, if required (see 3.3.8).

j. Voltage requirements, if different (see 3.4.6).

k. Voltage requirements, (see 3.4.6).

l. Motors, if different (see 3.4.6.1).

m. Worklight, if required (see 3.4.7).

n. Hour meter, if required (see 3.4.8).

o. Size and capacity, if different (see 3.5).

p. Specify physical size limitation, if required (see 3.5.1).

q. Additional performance features, if required (see 3.6.1).

r. Standard equipment, if different (see 3.7).

s. Specify and fully describe optional equipment, if required (see 3.8).

t. Specify applicable repair parts, if required (see 3.9).

u. Lubrication plate, if required (see 3.10.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

v. Specify information to be provided on lubrication plate, if different (see 3.10.1).

w. Nameplate, if different (see 3.10.2).

x. Inspection conditions, if different (see 4.3).

y. First article inspection, if different (see 4.4).

z. Quality conformance inspection, if different (4.5).

aa. Additional performance tests, if required (see 4.7.4).

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DIDs) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DIDs are tailored to reflect the requirements of the specification acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	DID Number	DID Title	Suggested Tailoring
N/A	DI-TMSS-80527	Commercial Off-The-Shelf (COTS) Manuals	Require all data be in the English Language
N/A	DI-TMSS-80528	Supplemental Data for Commercial Off-The-Shelf (COTS) Manuals	Require all data be in the English Language

The above DIDs were those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DIDs are cited on the DD Form 1423.

6.3.1 Technical data. It should be specified in the remarks section of the DD Form 1423 that all technical data furnished should be written in the English U.S. language.

6.4 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a first article sample, a first production item, or a standard production item from the contractor's current inventory and the number of items to be tested as specified in 4.4. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples of first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Definitions.

6.5.1 Inch-pound units. Inch-pound units are a system of measures based on the yard and pound commonly used in the United States of America and defined by the National Institute of Standards and Technology. Inch-pound units having the same names in other countries may differ in magnitude.

6.6 Cross-reference of classification. Classification changes from the previous issue of this specification are as follows:

MIL-F-3967D	MIL-F-3967E
	Type I (new type)
	Type II (new type)
Size 6	Size 6 (deleted)
	Size 7 (new size)

6.7 Changes from previous issues. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

6.8 Safety and health requirements. OSHA 29 CFR 1910 limits only the total hazard level (noise, radiation, electromagnetic emissions, noxious vapors, air contaminants and heat) of the environment in which a machine will operate. It does not limit the hazard level of individual machines in an operating environment. The procuring activity should analyze the existing hazard level in the proposed operating environment and specify additional requirements necessary to integrate this new machine into its future environment.


6.9 Training. Training required by the procuring activity should be provided as specified in the contract.

6.10 Warranty. Warranty requirements should be as specified by the procuring activity in the contract.

6.11 Inspection location. The contractor should identify in his response to the solicitation the location where inspection and tests are to be performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

6.12 Part or Identifying Number (PIN). The PIN to be used for machines acquired to this specification are created as follows:

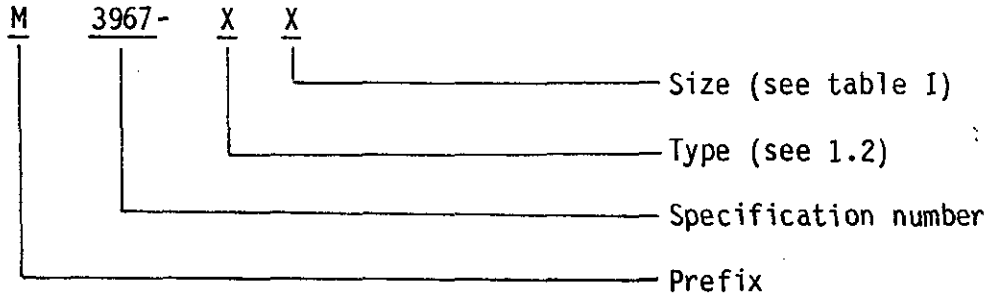

6.13 Subject term (keyword) listing.

Beading
Crimping
Flanging
Forming
Sheet metal
Slitting

Custodians:
Army - AL
Navy - SH
Air Force - 99

Review activity:
DLA - GS
Air Force - 84

User activity:
Navy - YD, SH

Preparing Activity:
DLA - IP

Project (3441-0143)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-F-3967E	901031

3. DOCUMENT TITLE

Forming Machines, Sheet Metal, Rotary, Combination Floor Mounting, Motor Driven

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Defense Industrial Plant Equipment Center	(901)775-6694	(AV)683-6694
c. ADDRESS (Include Zip Code) 2163 Airways Blvd. Memphis, TN 38114-5051	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:04Z
Check the source to verify that this is the current version before use.