
MILITARY SPECIFICATION SHEET

WAVEGUIDE ASSEMBLIES, RIGID, 90-DEGREE STEP TWIST

CG-1130/U AND CG-1131/U

The complete requirements for procuring the waveguide assemblies described herein shall consist of this document and the issue in effect of Specification MIL-W-3970.

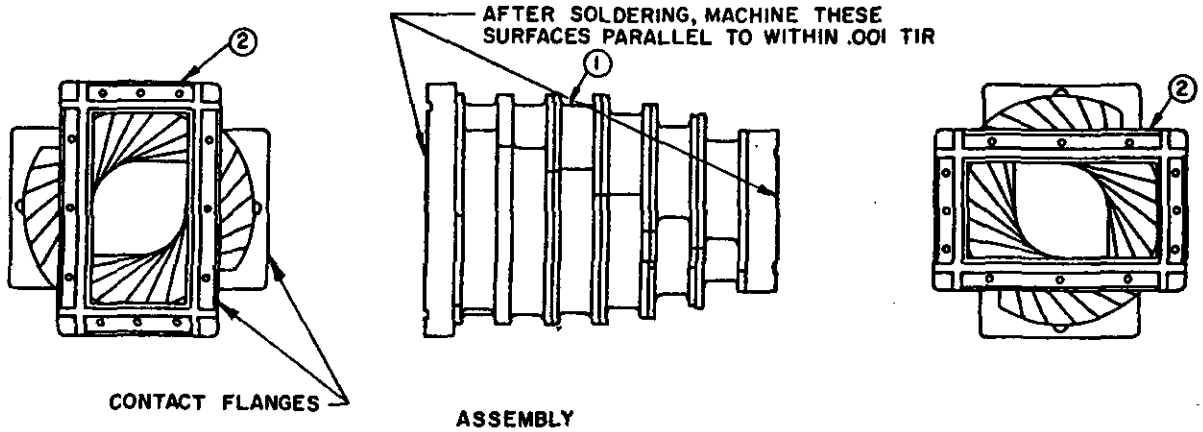

Military Part No.	Assembly Type	Item	Description	Material	Waveguide sections per MIL-W-85C from	Flanges Equivalent to
M3970/2-001	CG-1130/U	1	Center step assembly	Brass	RG-69/U	---
		2	Flanges	Brass	---	UG-417A/U per MIL-F-3922/32
		3	Pin - 3/8 long	Drill rod	---	---
M3970/2-002	CG-1131/U	1	Center step assembly	Aluminum	RG-103/U	---
		2	Flanges	Aluminum	---	UG-418A/U per MIL-F-3922/33
		3	Pin - 3/8 long	Aluminum	---	---


1. All dimensions in inches.

2. Unless otherwise specified, tolerances are ±1/64 on fractions, ±0.005 on decimals, and ±1/2 degrees on angles.


3. Angle of twist:
   5 sections at 13 degrees each.
   2 sections at 12 1/2 degrees each.


FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:05Z
Check the source to verify that this is the current version before use.



SECTION B-B

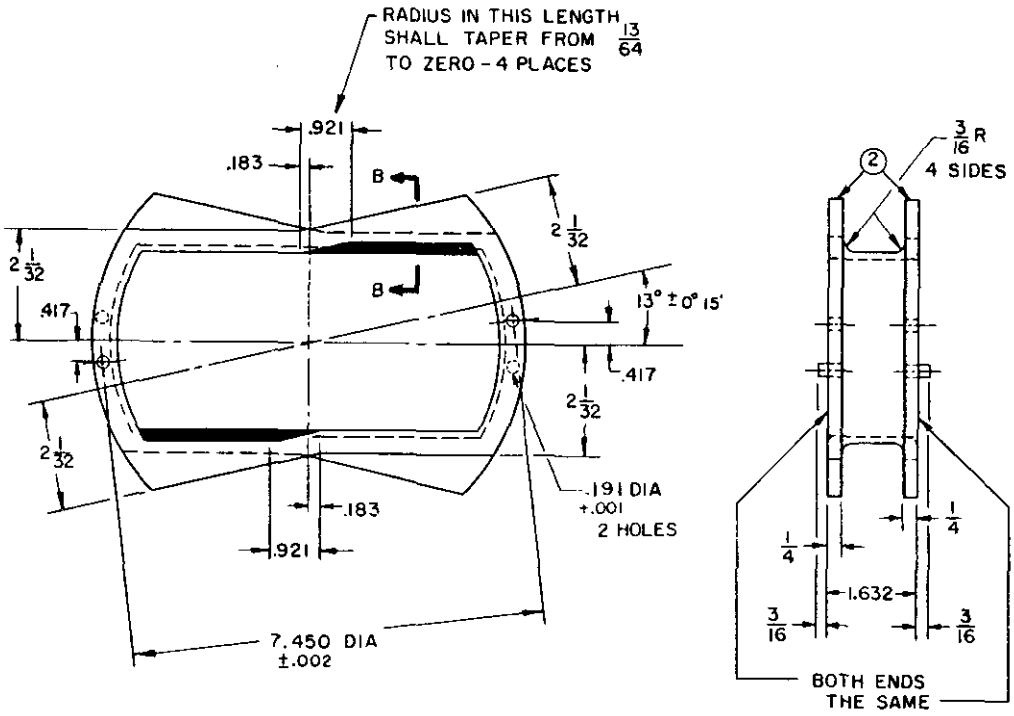


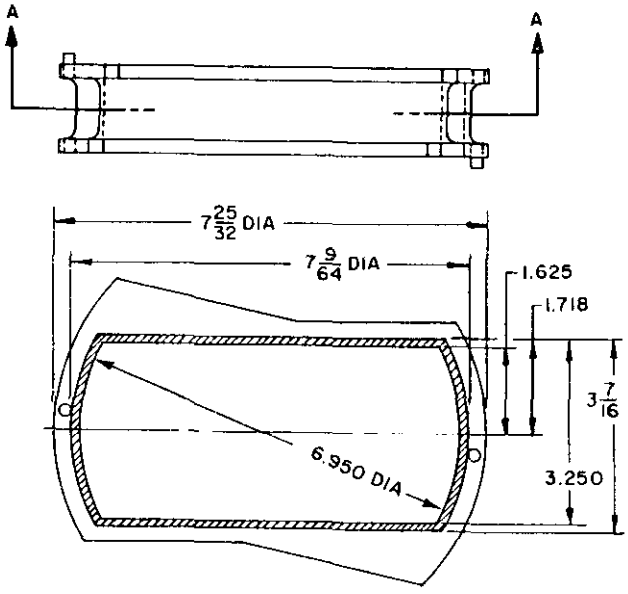

SECTION A-A

CENTER STEP ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:05Z
Check the source to verify that this is the current version before use.

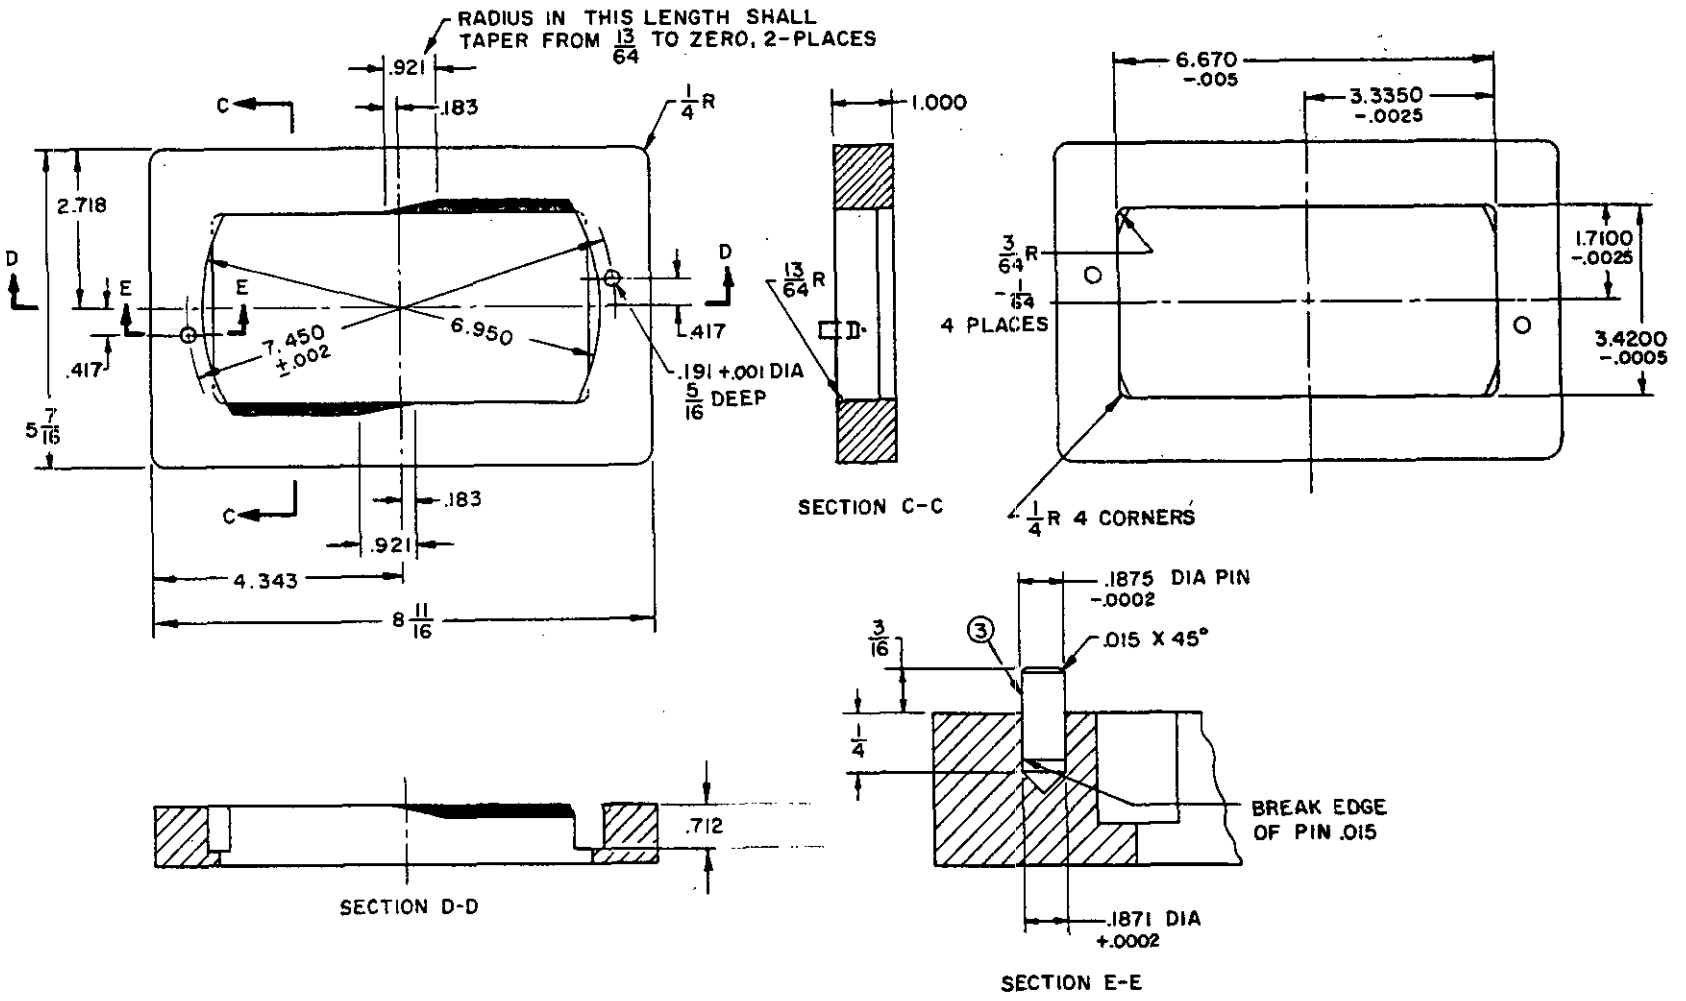

② FLANGES

③ PIN

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:05Z
Check the source to verify that this is the current version before use.

Solder.- All parts shall be securely soldered in place using solder conforming to composition Sn60 of QQ-S-571.

Finish.- After machining, brass shall be finished in accordance with finish No. M351, type II of MIL-F-14072 and a rhodium or palladium flash shall be applied.

Engineering information.- Waveguide assemblies covered by this specification sheet exhibit a maximum VSWR of less than 1.05:1 over 40 percent of the usable bandwidth of the assembly. The following electrical characteristics are furnished for information only:

Assembly type	Frequency range kmc/sec-TE_{10} mode	Power rating at sea level in kw	Used with rectangular waveguides per MIL-W-85
CG-1130/U	1.12 - 1.70	6,000	RG-69/U
CG-1131/U	1.12 - 1.70	6,000	RG-103/U

Custodians:
Army - EL
Navy - Ships
Air Force - ASD

Preparing activity:
Navy - Ships
(Project 5985-0233)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:05Z
Check the source to verify that this is the current version before use.