

MILITARY SPECIFICATION SHEET

WAVEGUIDE ASSEMBLIES, RIGID, 90-DEGREE STEP TWIST, CG-1128/U, CG-1129/U, CG-1132/U, and CG-1133/U

The complete requirements for procuring the waveguide assemblies described herein shall consist of this document and the issue in effect of Specification MIL-W-3970.

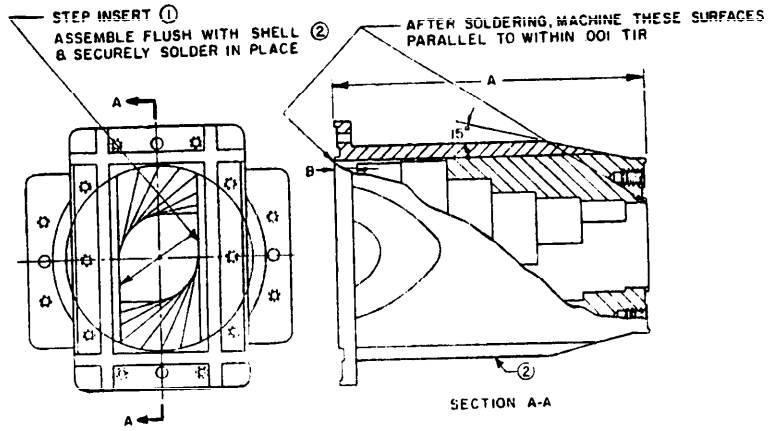





Military part no.	Assembly type	Item	Description	Material	Waveguide sections per MIL-W-85 from	Flanges equivalent to	Dimensions A	Dimensions B
M3970/3-001	CG-1128/U	1 2	Step insert Shell	Brass	RG-112/U ---	--- UG-553/U per MIL-F-3922/14	5.865	0.372
M3970/3-002	CG-1129/U	1 2	Step insert Shell	Aluminum	RG-113/U ---	--- UG-554/U per MIL-F-3922/15		
M3970/3-003	CG-1132/U	1 2	Step insert Shell	Brass	RG-104/U ---	--- UG-435A/U per MIL-F-3922/34	7.419	0.471
M3970/3-004	CG-1133/U	1 2	Step insert Shell	Aluminum	RG-105/U ---	--- UG-437A/U per MIL-F-3922/35		

1. All dimensions in inches.
2. Unless otherwise specified, tolerances are ±1/64 on fractions and ±0.005 on decimals.

FSC 5985


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:05Z
Check the source to verify that this is the current version before use.

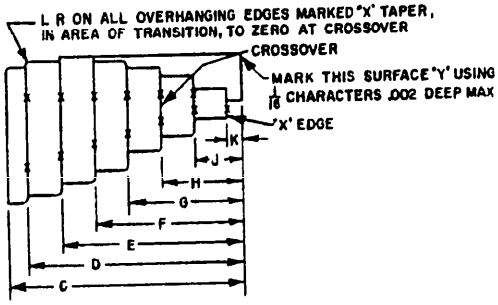


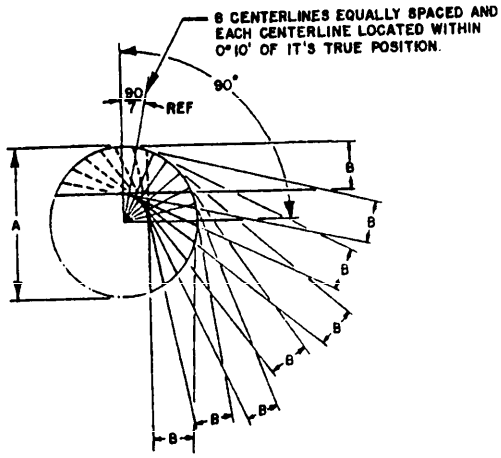

① STEP INSERT

Assembly type	Dimensions										
	A	B	C	D	E	F	G	H	J	K	L
CG-1128/U CG-1129/U	3.6339-0.0012	0.968+0.002	5.927	5.524	4.670	3.817	2.963	2.110	1.256	0.403	7/64R
CG-1132/U CG-1133/U	4.5968-0.0009	1.224+0.002	7.481	6.979	5.899	4.820	3.740	2.661	1.581	0.502	9/64R

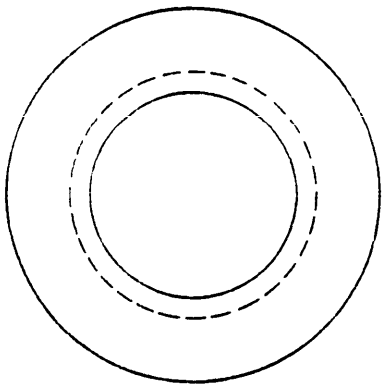

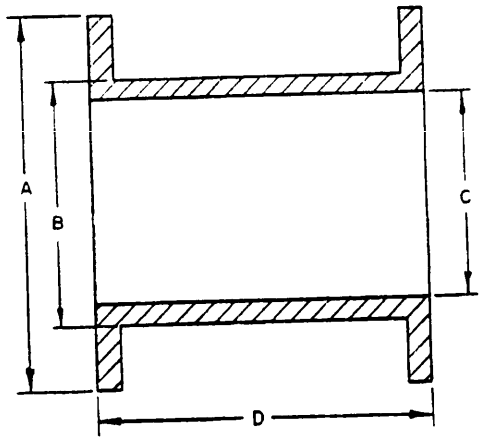

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:05Z
Check the source to verify that this is the current version before use.

Assembly type	Dimensions			
	A	B	C	D
CG-1128/U CG-1129/U	6-5/8	4-5/16	3.6360+0.0012	5.927
CG-1132/U CG-1133/U	7-5/8	5-19/64	4.5980+0.0009	7.481

Solder. All parts shall be securely soldered in place using solder conforming to composition Sn60 of QQ-S-571.

Finish. After machining, brass shall be finished in accordance with finish No. M351, type II of MIL-F-14072 and a rhodium or palladium flash shall be applied.

Engineering information. Waveguide assemblies covered by this specification sheet exhibit a maximum VSWR of less than 1.05:1 over 40 percent of the usable bandwidth of the assembly. The following electrical characteristics are furnished for information only:

Assembly type	Frequency range kmc/sec-TE_{10} mode	Power rating at sea level in kw	Used with rectangular waveguides per MIL-W-85
CG-1128/U	2.20 - 3.30	1,700	RG-112/U
CG-1129/U	2.20 - 3.30	1,700	RG-113/U
CG-1132/U	1.70 - 2.60	2,600	RG-104/U
CG-1133/U	1.70 - 2.60	2,600	RG-105/U

Custodians:
Army - EL
Navy - Ships
Air Force - ASD

Preparing activity:
Navy - Ships
(Proj. 5985-0492)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:05Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T03:05Z
Check the source to verify that this is the current version before use.