MILITARY SPECIFICATION SHEET

ELECTRON TUBE, KLYSTRON

TYPE DOD- 037

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Pulsed amplifier, magnetically focused, tunable frequency range 5,400 to 5,900 MHz

ABSOLUTE RATINGS:

Parameter:	Ef	eb	eb(inverse)	ib	Ib	Pi	pi	Pd	pd
Unit:	V	kv	kv	a	mA	kW	Mw	W	kw
Maximum:	5.25	135	50	111	225	24.1	15.0	50	15
Minimum:	4.25	---	---	---	---	---	---	---	---
	(Note 1)	(Notes 2,3,4)		(Note 8)				(Note 10)	(Note 5)

ABSOLUTE RATINGS:

Parameter:	Po	po	Beam Du	RF Du	tp	VSWR	I(magnet)
Unit:	kW	Mw	---	---	µs	σ'	A
Maximum:	5.25	3.3	0.002	0.0018	6.0	---	15
Minimum:	---	---	---	---	---	1.5:1	---
		(Notes 6,7a)	(Note 9d)	(Note 9d)	(Note 9)	(Note 7c)	(Note 3)

ABSOLUTE RATINGS:

Parameter:	Waveguide pressurization	Coolant pressure	TA	Applied tuner torque	Alt
Unit:	psia	psia	°C	in.-oz	ft
Maximum:	75	150	85	160	10,000
Minimum:	60	---	-32	---	---
	(Note 7c)	(Note 11b)	(Note 11d)	(Note 12)	(Note 11c)

PHYSICAL CHARACTERISTICS:

Dimensions: See figure 1
Mounting position: Any (see notes 3 and 4)
Base: Special rigid leads
Ground: Tube shell and .250 -20 UNC ground connection (see figure 1)
Cathode: Coated unipotential
Weight: 140 pounds (max)
Tuning: See note 12; and mechanical tuning under QCI, part 1
Thermal interlocks: See note 13
Cooling: Liquid (see note 11)
Construction: Ceramic-metal (see note 23)

TEST CONDITIONS: See notes 3, 9, 12, and 16

Parameter:	Ef	tk	eb	pd	Beam tp
Unit:	V	sec	kv	kw	µs
Tolerance:	---	max	---	max	max
Test condition 1:	NPV	300	128	2	6.0
Test condition 2:	NPV	300	128	5	6.0
	(Note 1)	(Note 1)	(Notes 2,3,4)	(Note 5)	(Notes 9,10)

TEST CONDITIONS: See notes 3, 9, 12, and 16

Parameter:	Beam Du	VSWR	I(magnet)	F
Unit:	---	σ'	A	MHz
Tolerance:	min	max	±1.15	---
Test condition 1:	0.002	1.2:1	12.85	F1, F2, F3
Test condition 2:	0.002	1.2:1	12.85	F1, F2, F3
	(Note 9d)		(Note 3)	

FREQUENCY	
F	MHz
F1	5,400
F2	5,650
F3	5,900

GENERAL:

First article sample inspection - Required (see note 25)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	TESTS	CONDITIONS	SYMBOL	LIMITS		UNIT
						MINIMUM	MAXIMUM	
	Quality conformance inspection, part 1	14	-					
4289	Heater current, nonoperating	1	-	Ef = 4.75 V; tk = 300 (max)	If	48	58	A
1256	Cathode current	-	-	Ef = NPV; eb = 128 kv; tk = 300 (max)	ib	87.5	105	a
4214	Cathode emission	15	-	Ef = NPV; eb = 128 kv; tk = 300 (max)	Δib/ib	---	5	%
4250	Power output (1)	6a	1		po(1)	2.5	---	Mw
4250	Power output (2)	6	2		po(2)	2.9	---	Mw
4223	Mechanical tuning range	6,12	2	Low frequency High frequency	F F	--- 5,900	5,400 ---	MHz MHz
4223	Mechanical tuning rate	12	-	F1 through F3 (see figure 2)	---	---	---	---
	Input and output resonators	12, 6	1	pd = 5 kw	---	8	12	Turns
	Middle resonator	12, 6	1,2	pd = 2 kw and 3 kw	---	21	29	Turns
4223	Operating torque	-	-	No voltages applied	Torque	---	40	in.-oz
4006	X-radiation	6b,17	2	F1; po saturated	XR1 XR2 XR3	--- --- ---	8 25 25	mR/hr mR/hr mR/hr
	Quality conformance inspection, part 2							
1143	Forced cooling (liquid)	11	-	Inlet temperature 10° to 70°C	---	---	---	---
4223	Mechanical tuning fatigue	-	-	All tuners; no voltages applied	---	2,000	---	Cycles
4223	Tuner stop endurance	-	-	No damage	Torque	160	---	in.-oz
4266	Direct-interelectrode capacitance	-	-	Electron gun to tube body	Cak	---	40	pF
1105	Permanence of marking	-	-		---	---	---	---
	Quality conformance inspection, part 3							
---	Life test	6,8,10	1	Group D; Ef = 5.0 V; F2; flat pulse top	t	2,000	---	hrs
---	Life-test end points:							
4250	Power output (2)	6	2	pd = 2 kw	po	2.4	---	Mw
1256	Cathode current	-	-	Ef = NPV; eb = 128 kv; tk = 300 (max)	ib	80	104	a
1031	Vibration fatigue	20,24	-	No voltages applied	---	---	---	---
1042	Shock, specified pulse	19,24	-	Test condition B; no voltages applied	---	---	---	---
4027	Temperature coefficient	6,22,24	2		$\frac{\Delta po(2)}{\Delta T}$	---	0.025	dB/°C
4253	Gain	6a,6c, 6d,21, 24	1	F1 through F3	Gss	36	42	dB

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	TESTS	CONDITIONS	SYMBOL	LIMITS		UNIT
						MINIMUM	MAXIMUM	
	Quality conformance inspection, part 3 -Continued							
4257	Amplifier insertion loss	6b,6d, 6e, 7, 24	2		σ'	---	1.5:1	Ratio
4303	Warmup time	5,6a, 18,24	1		---	---	---	---
---	Thermal interlocks	13,24	-		---	---	---	---

NOTES:

1. The heater surge current shall be limited to 70 amperes when initially applying heater voltage. Apply heater voltage Ef = NPV (where NPV = Name Plate Value). The TUT shall stabilize within the specified limits after a 5-minute (maximum) preheating period.

2. The following procedure shall be applied for new tubes and tubes which have not been operated during the previous 2-month period:

   (a) The heater shall be preheated as specified in note 1.
   (b) After the preheat period apply eb = 50 kv for 30 minutes, then increase eb to 100 kv for 30 minutes.
   (c) Increase eb until po(2) = 2.9 Mw.

3. The TUT shall satisfy all requirements specified herein when operated in a magnet structure (Sperry Specification Number T-1108, or equivalent). The TUT type number and serial number shall be readable when the TUT is mounted in this structure. The TUT magnet current shall be optimized and shall be within the limits specified under test conditions 1 and 2. This optimized value shall be specified on the nameplate of each tube.

4. The electron gun insulator shall be operated in insulating oil (Univolt 35, or equivalent). The oil should check above 28 kV per 0.1 inch (see ASTM D-877).

5. The TUT shall not be damaged when operated with rf drive power (pd) when eb = 0.

6. The power output shall be determined as follows on the basis of the output pulse width (trf):

   (a) The three resonators of the TUT shall be identically tuned to the rf drive frequency at the specified eb. Tune the input and output resonators to the specified drive frequency and detune the middle resonator toward frequencies greater than the specified rf drive frequency until the power output is optimized.
   (b) With the TUT input and output resonators tuned for specified drive power (see 6a above), increase the drive power to 5 kw. The middle resonator (only) shall be tuned to the high-frequency side of the drive power until the output power is maximized. (Note: If the peak power output exceed the maximum rating, detune the middle resonator.)
   (c) There shall be no significant rf power output from the TUT at frequencies above cutoff for a rectangular waveguide (1" x 2") due to self-excited oscillations in the TUT.
   (d) The specified power output shall be delivered at all rf output pulse widths to 6 μs.
   (e) Under test conditions 1 and 2, the input VSWR shall not be greater than 1.75:1 at the specified frequencies.

7. Power output characteristics:

   (a) The power output shall not be less than 2.5 Mw for any phase of a load VSWR of 1.5:1 under power output (2) conditions.
   (b) The TUT shall not be damaged by a load under the following conditions:

VSWR (any phase)	Output waveguide pressurization (psia)
1.5:1 (maximum)	61.5 ±1.5
---	75 (pressure test)

8. An external circuit shall be provided to interrupt the TUT beam voltage whenever the cathode current exceeds 120 amperes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

9. Pulse characteristics:

   (a) Beam pulse width shall be measured between the 50 percent points of the beam current when viewed by a linear circuit which presents a voltage presentation of the pulse. For illustration of the pulse see MIL-STD-1311, method 4304, figure 4304-1.
   (b) The beam current pulse characteristics (when viewed as specified in note 9(a)) shall be measured at the pulse amplitude points indicated below:

Characteristics	Description	Defines
Pulse top*	Flat ±2% for 4.6 µs (minimum)	eb
Rise time	0.6 µs maximum (10 to 90%)	ib
Decay time	1.8 µs maximum (90 to 10%)	ib

   * Pulse top is considered the 100 percent point and is defined as the arithmetic mean of amplitude variation across the top of the pulse. All specified values of eb shall be determined on this basis.

   (c) RF pulse width shall be measured between the 3 dB points of the rf output pulse when viewed through a crystal detector operating in the linear region, or an equivalent circuit.
   (d) The maximum operational prf is to be determined by the maximum duty cycle and the pulse width applied.

10. The average beam power shall be determined by the product of the average beam current (Ib) and the peak beam voltage (eb), or the product of the peak beam current (ib), peak beam voltage (eb) and the beam Du, shall not exceed the limit specified herein for Pi.

11. Coolant and cooling requirements:

   (a) Liquid coolant shall be supplied to the drift tube and collector. Drift tube heating varies with focus coil current, beam voltage, rf drive power and tuning of the middle and output resonators. Flows at inlet temperatures listed for collector and drift tube will allow safe operation for the conditions of this specification. Increasing flow or decreasing inlet temperature (inlet temperature must remain above minimum listed values) will also provide safe operating conditions. Flows for inlet temperature between values listed may be interpolated by assuming linear relationship between any two adjacent values.
   (b) The absolute maximum inlet temperature shall not exceed the specified values under any conditions of operation. Recommended operating maximum values provide a small margin of safety for short term fluctuations in flow rate or inadvertent short term operation of the TUT outside this specification. Flows below absolute minimum listed may fail to provide heat transfer and are not permitted under any conditions of operation. Temperatures below 10°C are listed for operational information and are not to be tested by the manufacturer. Pressure drops listed are for flow at the temperature listed.

Coolant - Water					
Condition	Inlet temperature °C	Collector		Drift tube	
		Flow gpm Min	Pressure drop psi Max	Flow gpm Min	Pressure drop psi Max
Absolute maximum (T)	77	9.2	46-1/2	3.0	46-1/2
Recommended operating maximum (T)	70	6.0	24	1.45	21-1/2
	65	5.0	17	1.15	11-1/2
Absolute minimum (flow)	62	---	---	1.0	7-1/2
Absolute minimum (flow)	56-1/2	4.0	12	1.0	7-1/2
Absolute minimum (flow)	10 to 40	3.0	8	1.0	7-1/2
Coolant - 50% ethylene glycol (Volume)					
Absolute maximum (T)	67	6.6	36	3.0	54-1/2
Recommended operating maximum (T)	65	6.0	32-1/2	2.25	36-1/2
	57	5.0	26	1.25	15
Absolute minimum (flow)	-32 to +35	3.8	18	1.25	15

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

11. -Continued

(c) An absolute pressure of 35 psia (minimum) shall be maintained at the outlet of all water cooling passages of the TUT and magnet.
(d) Storage of tubes at temperatures below 1°C (water) or -32°C (50% ethylene glycol) with liquid in the coolant passages is prohibited as construction is such that damage to the tube may result at lower temperatures.

12. Three plasticized tuning charts (one for each resonator) shall be supplied in the package with each tube. These charts shall relate tube revolution counter reading (vertical scale) to frequency in GHz (horizontal scale) in accordance with figure 2 (shown for middle resonator). Data for plotting the tuning charts shall be taken in increments of 100 MHz (maximum). Data at bandwidth endpoints (F1 and F3) shall be plotted. The middle resonator tuning chart shall be supplied for detuned settings of pd = 2 kw and 3 kw. Maximum tuning of the resonators shall be as specified under quality conformance inspection, part 1, mechanical tuning rate. The curve for each resonator shall be within four turns of a straight line drawn between the end points of the curve.

13. Two thermal safety switches shall monitor the temperature of the collector and drift tubes. Except as specified herein, an internal short shall exist between the interlock terminals. The tube shall not be operated in a closed coolant circuit with an external short applied between the interlock terminals. The ratings of the switches are 3 amperes @ 110 Vac, and are calibrated to open at 240°F (115.5°C) ±5°F and close at 220°F (104.5°C) ±7°F.

14. Unless otherwise specified, the AQL for all tests listed under quality conformance inspection, part 1, shall be 1.0, inspection level II.

15. The heater voltage (Ef) shall be decreased by 0.5 V from NPV. The percentage change in cathode current, determined in accordance with the following formula, shall not exceed the specified limits:

$$\frac{\Delta ib\ \%}{ib} = \frac{ib\ (Ef = NPV) - ib\ (Ef = NPV - 0.5\ V)}{ib\ (NPV)} \times 100$$

where NPV = Name Plate Value

16. A perveance chart shall be supplied in the package with each tube showing values of beam current (ib) recorded during quality conformance inspection, part 1, testing versus beam voltage (eb) at nominal heater voltage (Ef) in accordance with figure 3 of this TSS. This chart will be used in achieving optimum performance when the tube is installed.

17. The X-radiation shall not exceed the limits specified when the TUT is operated under the specified conditions, and measured as specified below:

(a) XR1 is to be measured at a distance of 1 foot in all directions from the outer surface of the collector lead shield above the magnet structure mounting flange, except for the direction and area controlled by XR2.
(b) XR2 is to be measured at a distance of 1 foot from the output waveguide mounting flange on a line perpendicular to the flange face passing through the center of the flange. The cross sectional area of the radiation pattern covered by XR2 specification shall be less than twice the maximum internal dimension of the waveguide squared.
(c) XR3 is to be measured at a distance of 1-1/2 feet in all directions normal to the outer surface of the magnet structure, Sperry Specification No. T-1108, or equivalent, below the magnet structure mounting flange.

18. Apply heater voltage for at least 5 minutes, then apply drive power (pd). The TUT power output (po) shall be at least 2.5 Mw within 10 seconds after applying beam voltage.

19. The TUT shall withstand the application of two blows in each of three mutually perpendicular planes, measured by accelerometer placed at the lower high voltage ceramic support ring, and mounted in an approved manner such that the TUT and mounting fixture have a natural frequency of 31 ±6 Hz with a maximum deflection of 3/8 inch (9.53 mm) ±1/6 inch. After completing this test, the TUT shall satisfy the requirements of all quality conformance inspection, parts 1 and 2 tests, except for the required holding period.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

20. The TUT shall withstand the application of type I vibration in accordance with MIL-STD-167 except that nonresilient mountings shall be used (omit 3.1.4.2.4) and the amplitudes from 22 to 33 Hz shall be three times those specified. In addition, omit portions of 3.1.3 "Basis of Acceptability", which require operation during vibration test. After completing this test, the TUT shall satisfy the requirements of all QCI-1 and QCI-2.

21. The TUT shall have all resonators identically tuned to the drive frequency at the specified beam voltage (eb).

22. Power output variations shall not exceed the specified limits with variations in inlet coolant temperature within 10° to 70°C, when the TUT is operated under test condition 2, power output (2) conditions.

23. Construction of this tube shall conform to the following of MIL-E-16400, except that 4.5.15, salt spray, shall not apply to this TSS:

Materials	3.5 (except 3.5.13)	Soldering	3.11.3
Coatings	3.6 (except 3.6.5)	Workmanship	3.15

(a) The six auxiliary tuner mounting holes (see figure 1) will be threaded inserts conforming to MIL-E-4158.
(b) High-temperature grease shall be used in tuning mechanism bearings and gear boxes, and shall be in accordance with MIL-G-3545.

24. This test shall be performed during the initial production and once each succeeding 12-calendar months in which there is production. A regular double sampling plan shall be used, with the first sample of three tubes with an acceptance number of zero, and a second sample of three tubes with a combined acceptance number of one. In the event of failure, the test will be made as a part of quality conformance inspection, part 2, code level D, with an AQL of 6.5. The regular "12-calendar month" double sampling plan shall be reinstated after three consecutive samples have been accepted.

25. First article sample inspection shall conform to the requirements of appendix F of MIL-E-1 and shall consist of performing all tests specified on this tube specification sheet (TSS). In addition, first article sample approval shall include satisfactory demonstration of tube-to-system capatibility. Invitation for bids should provide that the preparing activity reserves the right to waive the requirements for first article samples as to those bidders offering a product which has been previous procured or tested by the Government, and that bidders offering such products who which to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending procurement.

User activities:
Navy - AS, OS, MC, CG, SH

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5960-N070)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.

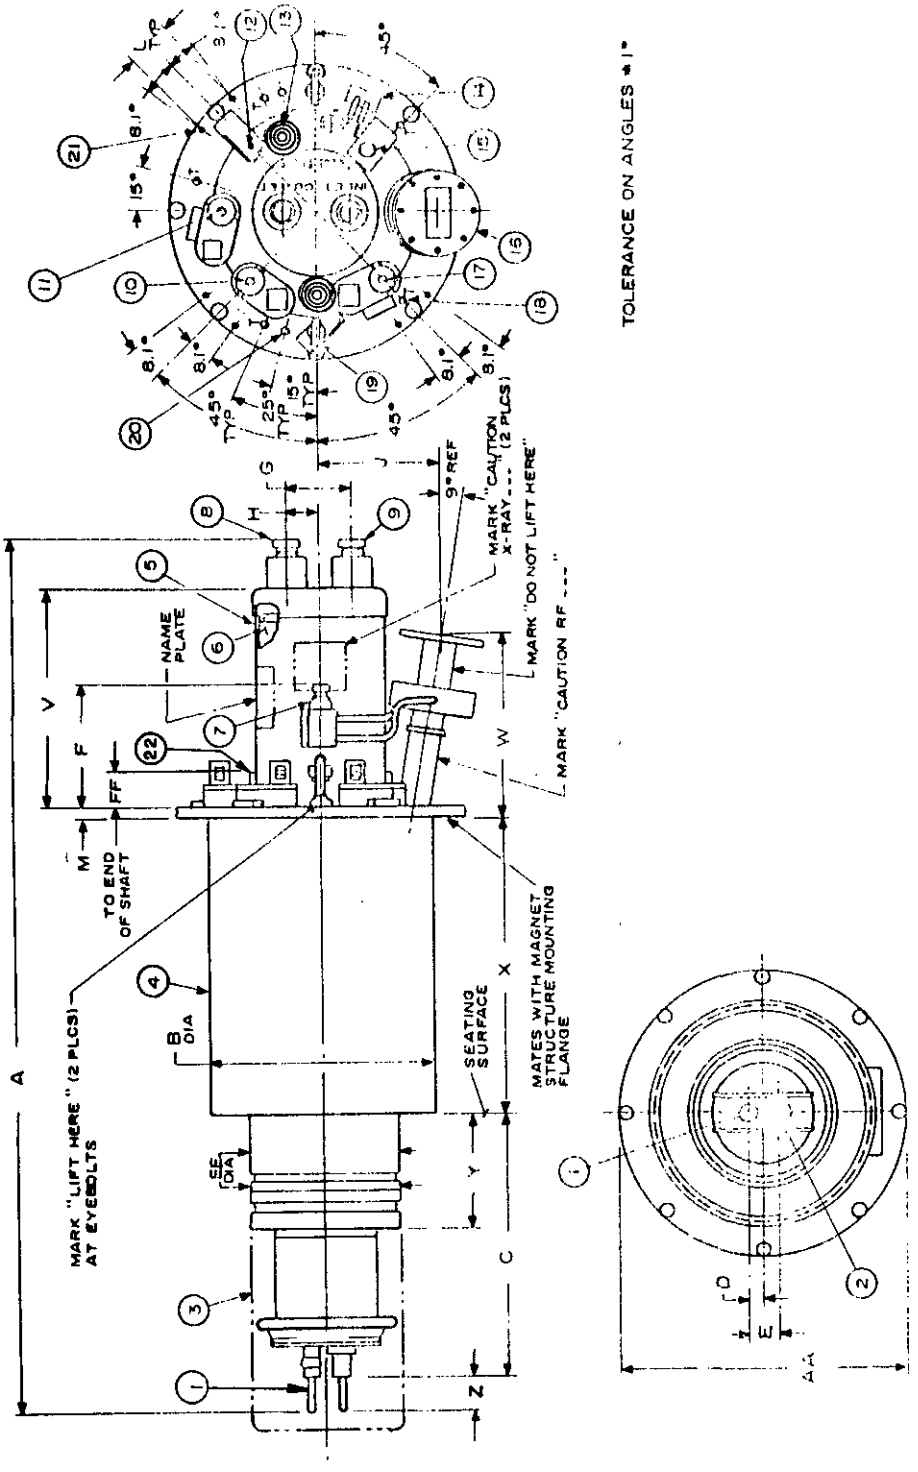


FIGURE 1. Outline drawing of electron tube type DOD-

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 1		
A		36.500 (927.10)
B		9.180 (233.17)
C	10.781 (273.84)	10.969 (278.61)
F		5.000 (127.00)
G	2.468 (62.69)	2.594 (65.89)
EE		6.005 (152.53)
FF	1.125 (28.58)	1.250 (31.75)
Quality conformance inspection, part 2		
H	1.202 (30.53)	1.328 (33.73)
J	4.750 (120.65)	5.000 (127.00)
K	11.062 (280.97)	11.124 (282.55)
M	.365 (9.27)	.385 (9.78)
N	6.203 (157.56)	6.265 (159.13)
P	7.501 (190.53)	7.595 (192.91)
Q	.182 (4.62)	.344 (8.74)
R	6.469 (164.31)	6.531 (165.89)
S	9.945 (252.60)	9.955 (252.86)
T	7.421 (188.49)	7.515 (190.88)
U	7.401 (187.99)	7.495 (190.37)
W	6.969 (177.01)	7.187 (182.55)
X	12.437 (315.14)	12.469 (316.71)
Y	4.500 (114.30)	4.750 (120.65)
Z	1.250 (31.75)	1.376 (34.95)
AA	11.969 (304.01)	12.031 (305.59)
BB	.245 (6.22)	.255 (6.48)
CC	.245 (6.22)	.255 (6.48)
DD	.290 (7.37)	.300 (7.62)
Reference dimensions		
D	.531 (13.49)	
E	1.031 (26.19)	
L	1.562 (39.67)	
V	8.922 (226.62)	

FIGURE 1. Outline drawing of electron tube type DOD- - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.

LEGEND:

1. Heater connection - 'BB' diameter.
2. Heater - cathode connection - 'CC' diameter.
3. Cathode protector cover.
4. Protective skin may be one piece or two piece suitably attached.
5. Collector cover shield.
6. Collector lead shield.
7. Corrosion-resistant steel coupling (output water cooling for drift tubes) on 'R' diameter. (Mark "DRIFT TUBE OUTLET" on water fitting and "DO NOT LIFT HERE"). Drift tube connectors shall be 37° flare nut AN-818-6C.
8. Corrosion-resistant steel coupling (output water cooling for collector). Collector connectors shall be 37° flare nut AN-818-10C.
9. Corrosion-resistant steel coupling (input water cooling for collector). Collector connectors shall be 37° flare nut AN-818-10C.
10. Input resonator tuning shaft located on 'T' diameter. (Mark "INPUT" on counter: - Veeder-Root catalog No. 114143, or equal).
    (a) .249-.250 (6.32 mm - 6.35 mm) diameter tuning shafts are provided. Clearance around each tuner shaft is as follows:

        Dimensions are from top of mounting flange
        Dimension 0 to .594 (15.09 mm) - no clearance.
        Dimension .594 (15.09 mm) to 2.031 (51.59 mm) - .750 (19.05 mm) diameter minimum clearance.
        Dimension 2.031 (51.59 mm) and above - 1.625 (41.28 mm) diameter minimum clearance.
11. Output resonator tuning shaft located on 'U' diameter. (Mark "OUTPUT" on counter - Veeder-Root catalog No. 114143, or equal) see 10a above.
12. Tube ground connection .250 (6.35 mm) -20 stud for AN-4 lug.
13. Corrosion-resistant steel coupling (input water cooling for drift tubes) on 'R' diameter. (Mark "DRIFT TUBE INLET" on water fitting and "DO NOT LIFT HERE"). Drift tube connectors shall be 37° flare nut AN-818-6C.
14. Thermal interlock connections.
15. Input connector type C, UG-571/U - mates with UG-573/U, on 'N' diameter, with protective cover AN type MX-1142/U.
16. Output waveguide - mates with AN type UG - 148 B/U choke flange.
17. Middle resonator tuning shaft - located on 'P' diameter. (Mark "MIDDLE" on counter - Veeder-Root catalog no. 114143, or equal) see 10a above.
18. Tube mounting holes - 'Q' diameter on 'S' diameter and marked 'T' (five holes).
19. Eyebolt - 1.00 inch (25.40 mm) (two required).
20. Alinement holes - 'DD' diameter on 'S' diameter (two holes).
21. Auxiliary tuner mounting holes - (No. 10) .190 (4.83 mm) -32 UNF-3B on 'K' diameter.
22. Manual tuning knob shall be provided on each resonator shaft.

FIGURE 1. Outline drawing of electron tube type DOD- ___ - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.

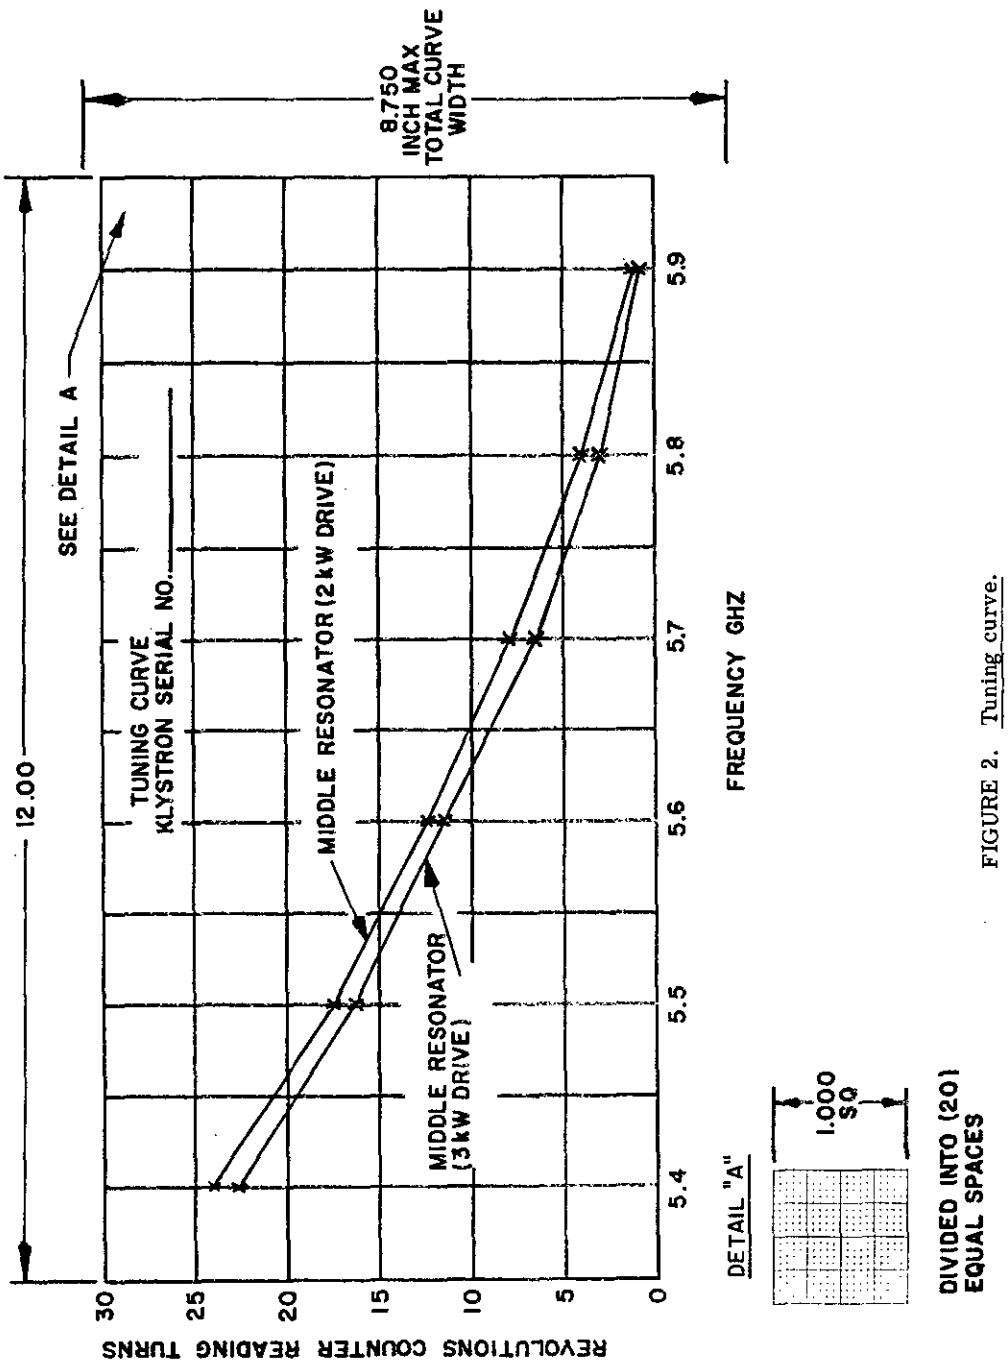


FIGURE 2. Tuning curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.

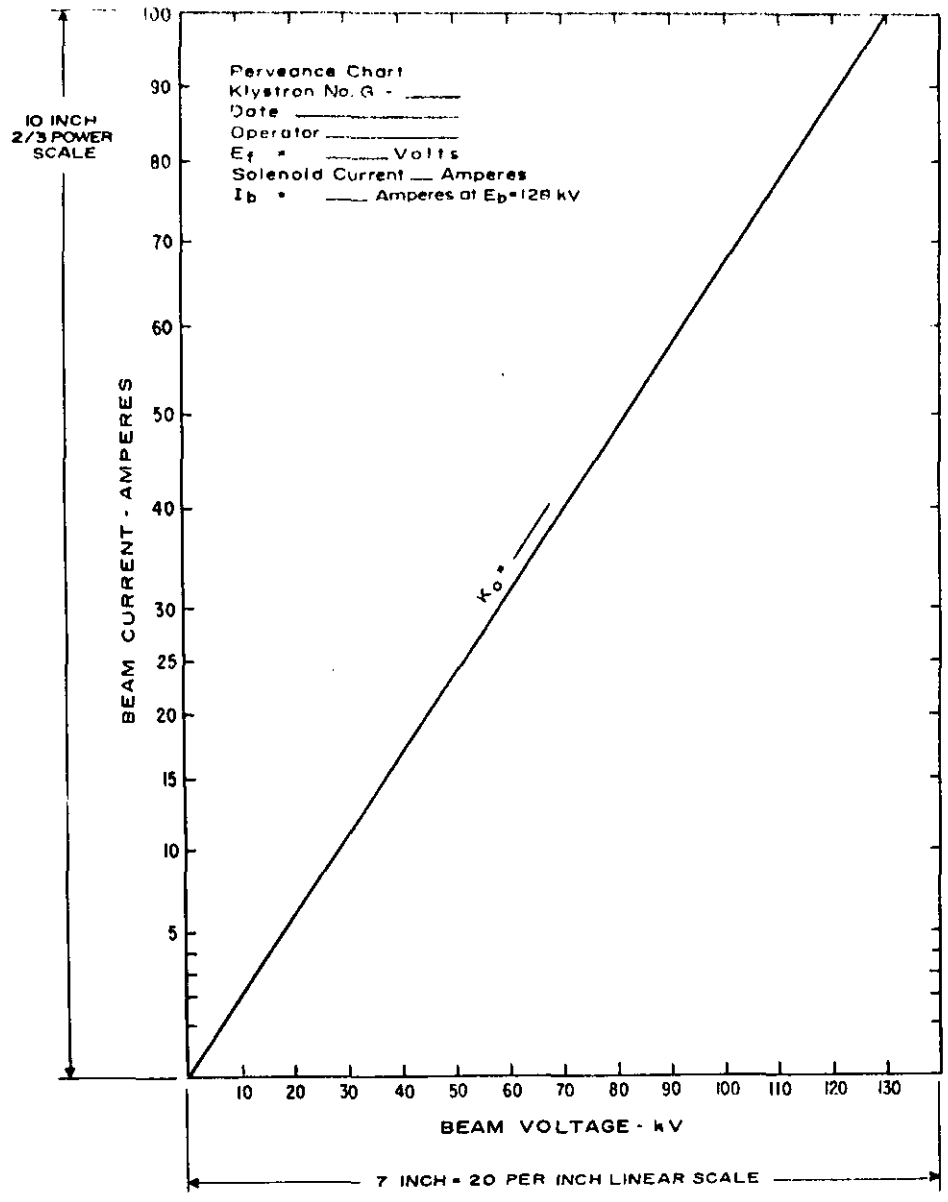


FIGURE 3. *Perveance chart.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:32Z
Check the source to verify that this is the current version before use.