MILITARY SPECIFICATION SHEET

ELECTRON TUBE, KLYSTRON

TYPE DOD-001

This amendment forms a part of Military Specification Sheet MIL-E-1/1687, dated 13 April 1970, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 5

Figure 1: Delete and substitute the new Figure 1.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - ER
Air Force - 11, 17, 99
DLA - ES


User activities:
Army - AR
Navy - AS, CG, MC, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5960-3260)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:18Z
Check the source to verify that this is the current version before use.

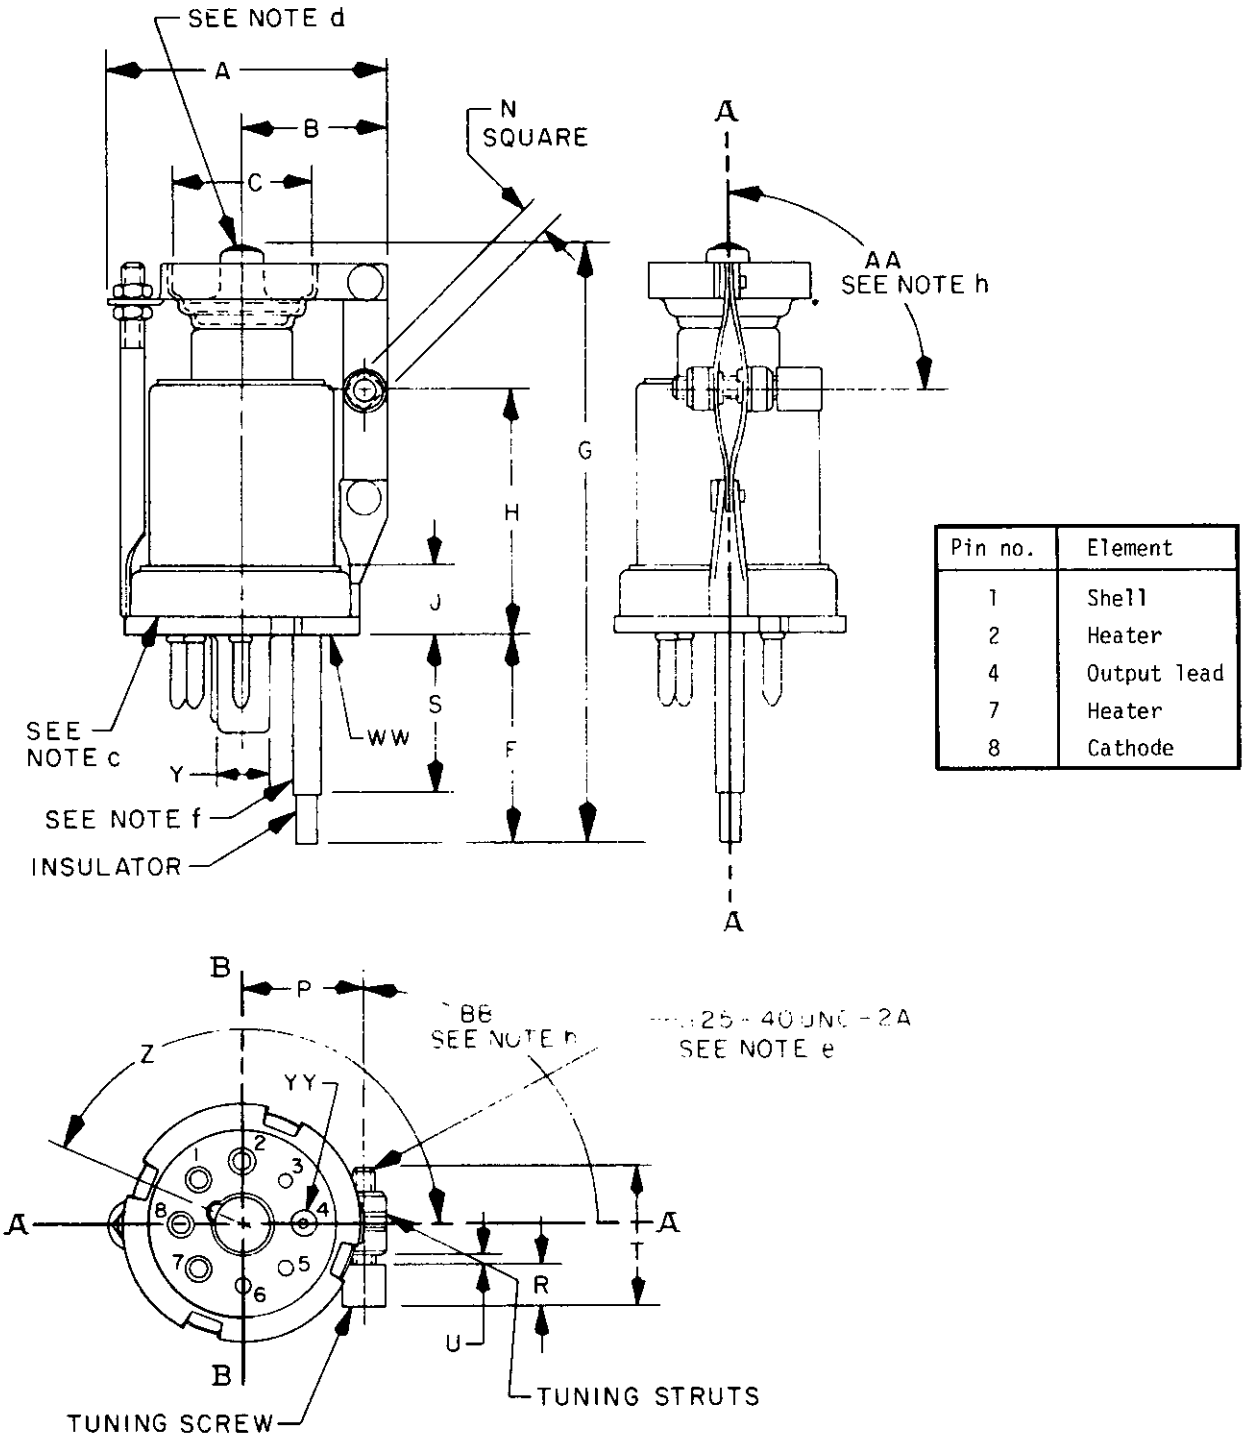

Pin no.	Element
1	Shell
2	Heater
4	Output lead
7	Heater
8	Cathode

FIGURE 1. Outline drawing of electron tube DOD-001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:18Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
Quality conformance inspection, part 1				
H	1.313	1.437	33.35	36.50
P	.656	.719	16.66	18.26
Z	154° 30'	160° 30'	154° 30'	160° 30'
AA	87°	93°	87°	93°
BB	87°	93°	87°	93°
Quality conformance inspection, part 2				
A	---	1.609	---	40.87
G	---	3.562	---	90.47
N	.182	.192	4.62	4.88
R	.203	.234	5.16	5.94
U	---	.135	---	3.43
Quality conformance inspection, part 3 (see note i)				
B	---	.859	---	21.82
C	.767	.797	19.48	20.24
F	1.203	1.235	30.56	31.35
J	.330	.400	8.38	10.16
S	.875	.985	22.22	25.02
T	.804	.835	20.42	21.21

NOTES:
a. Reference plane "A-A" passes thru the center of diameter "Y" and "Y-Y" at surface "WW", perpendicular to "WW".
b. Reference plane "B-B" passes thru the center of diameter "Y" at surface "WW", perpendicular to "WW" and plane "A-A".
c. Base: B6-92 (except dimension "S").
d. Cap: C1-4.
e. The tuning screw shall be lubricated with oildag or equivalent non-corrosive lubricant - it shall be capable of being operated smoothly through its entire range without perceptable binding.
f. Nickel (30 MSI silver plate permissible).
g. Applies to centerline of output lead and centerline of tuner through struts.
h. Dimensions "AA" and "BB" to be measured with bow springs opened.
i. This test shall be performed during the initial production and once each succeeding 12-calendar months in which there is production. A regular double sampling plan shall be used, with the first sample of three tubes with an acceptance number of zero, and a second sampling of three tubes with a combined acceptance number of one. In the event of failure, the test will be made as a part of quality conformance inspection, part 2, code level D, with an AQL of 6.5. The regular "12-calendar month" double sampling plan shall be reinstated after three consecutive samples have been accepted.

FIGURE 1. Outline drawing of electron tube DOD-001 - Continued.

☆U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/1269

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:18Z
Check the source to verify that this is the current version before use.