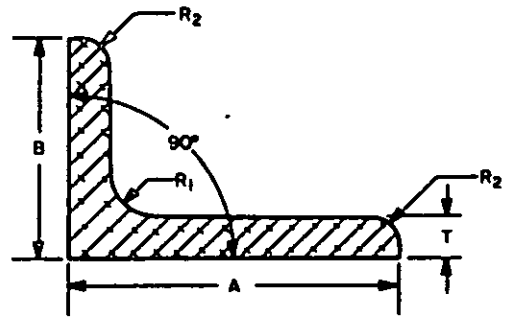


TABLE I. DASH NUMBERS.

DASH NO.	A	B	T	R_1	R_2	TEMPER
001	.875	.875	.125	.045	SQUARE	T6
003	1.000	.750	.040	.062	SQUARE	T6
005	1.000	1.000	.080	.120	SQUARE	T6
007	1.120	1.020	.070	.090	SQUARE	T6511
009	1.250	1.000	.125	.125	.125	T6511
011	1.500	1.000	.063	.156	.063	T6511
013	1.500	1.250	.125	.156	.125	T6511
015	1.500	1.250	.156	.156	.156	O
017	1.600	1.060	.070	.094	SQUARE	T6
019	1.750	.750	.063	.094	SQUARE	O
021	1.750	1.000	.094	.156	.094	T75511
023	1.750	1.750	.250	.250	.250	T6511
025	1.750	1.750	.190	.250	.032	T6
027	1.950	1.750	.080	.125	SQUARE	O
029	2.000	1.000	.125	.156	.125	T75511
031	2.000	1.500	.125	.188	.125	T6511
033	2.500	1.500	.156	.188	.156	O
035	3.000	2.500	.375	.250	.375	T76511
037	3.500	1.750	.093	.156	SQUARE	T6511
039	3.625	3.625	.404	.190	SQUARE	T6

USER ACTIVITIES:
NAVY - OS, SH

REVIEWER ACTIVITIES
AIR FORCE - 84
DLA - 19

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 29 Feb 1984 REVISED

P. A.	AS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	MR		ANGLE, SHAPE STYLE I ALUMINUM ALLOY 7075	MSI4287
	99			
PROCUREMENT SPECIFICATION QQ-A-200		SUPERSEDES:		PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. MATERIAL. ALUMINUM ALLOY 7075, (UNS A97075), AS SPECIFIED IN QQ-A-200/11.
2. FORMING PROCESS. EXTRUDED.
3. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS14287H001

- H001 — DASH NUMBER FROM TABLE I
- H — EXTRUDED (SEE REQUIREMENT 2)
- MS14287 — BASIC MS NUMBER

4. MARKING. ALUMINUM AND ALUMINUM ALLOYS SHALL BE MARKED WITH THE PRODUCER'S NAME OR REGISTERED TRADE MARK, THE PART NUMBER (MILITARY STANDARD (MS) NUMBER PLUS THE APPLICABLE DASH NUMBER), AND THE LOT NUMBER, AND THIS MARKING SHALL BE APPLIED IN ACCORDANCE WITH FED-STD-184.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. STANDARD LENGTH OF STRUCTURAL ANGLE IS 10 FEET MINIMUM, 12 FEET MAXIMUM.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
4. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:
NAVY - OS,SH

REVIEWER ACTIVITIES.
AIR FORCE - 84
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document

APPROVED 29 Feb 1984 REVISED

P. A.	AS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	MR		ANGLE, SHAPE STYLE I ALUMINUM ALLOY 7075	MS14287
	99			
PROCUREMENT SPECIFICATION QQ-A-200		SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:39Z
Check the source to verify that this is the current version before use.