
FSC CLASS
5320

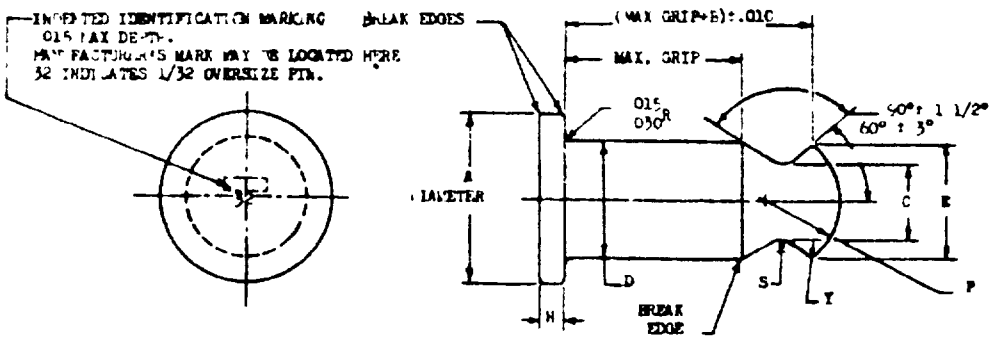

NOMINAL DIAMETER	A DIA.	B	(a) C DIA.	D DIA.	(a) E DIA	H	P SPHER RAD	S RAD	T MAX RAD
7/32	.315 .295	.125	.119 .115	2197 .2186	.185 .181	.059 .049	.128 .118	.034 .030	.0075
9/32	.412 .387	.165	.156 .152	2822 .2811	.245 .241	.069 .059	.167 .155	.044 .040	.0075
11/32	.505 .475	.206	.194 .189	3447 .3436	.307 .302	.078 .068	.206 .194	.054 .050	.0075
13/32	.630 .565	.248	.232 .227	.4072 .4061	.370 .365	.088 .078	.250 .237	.066 .062	.0075
15/32	.670 .641	.289	.270 .265	.4697 .4686	.432 .426	.108 .098	.295 .280	.077 .073	.0125
17/32	.770 .735	.330	.308 .303	.5322 .5311	.494 .488	.118 .108	.337 .322	.089 .085	.0125

NOMINAL DIAMETER	(b) MAX. GRIP LENGTH AND DASH NUMBERS													
	3/16	1/4	5/16	3/8	7/16	1/2	9/16	5/8	11/16	3/4	13/16	7/8	15/16	1
7/32	7-3	7-4	7-5	7-6	7-7	7-8	7-9	7-10	7-11	7-12	7-13	7-14	7-15	7-16
9/32		9-4	9-5	9-6	9-7	9-8	9-9	9-10	9-11	9-12	9-13	9-14	9-15	9-16
11/32			11-5	11-6	11-7	11-8	11-9	11-10	11-11	11-12	11-13	11-14	11-15	11-16
13/32				13-6	13-7	13-8	13-9	13-10	13-11	13-12	13-13	13-14	13-15	13-16
15/32					15-7	15-8	15-9	15-10	15-11	15-12	15-13	15-14	15-15	15-16
17/32						17-8	17-9	17-10	17-11	17-12	17-13	17-14	17-15	17-16

(a) "C" AND "E" SHALL BE CONCENTRIC WITH "D" WITHIN .003 TOTAL RUNOUT FOR 7/32, 9/32, 11/32 AND 13/32; WITHIN .005 FOR 15/32 AND 17/32 SIZES.

(b) FOR PINS WITHIN GRIP LENGTH IN EXCESS OF 1 INCH, CODE SECOND DASH NUMBER INDICATES MAX. GRIP IN 1/16 INCREMENTS.

MATERIAL: STEEL, SPEC AN-S-9, AN-QQ-S-690, MIL-S-5626, MIL-S-6049, MIL-S-6050, MIL-S-6096 OR MIL-S-6758.

HEAT TREAT: 160,000 TO 180,000 PSI, SPEC. MIL-H-6875.

FINISH: CADMIUM PLATE, SPEC QQ-P-416, TYPE I, CLASS C.

ROUGHNESS OF SURFACES OUTSIDE OF MAX. GRIP SHALL NOT EXCEED 80 RMS MICRO INCHES MEASURED BEFORE PLATING.

ROUGHNESS OF SURFACES WITHIN MAX GRIP SHALL NOT EXCEED 60 RMS MICRO INCHES MEASURED BEFORE PLATING.

HEAD AND SHANK TO BE CONCENTRIC WITHIN .010 FULL INDICATOR READING.

EXAMPLES OF PART NO. 9-14 = PIN, 9/32 DIA., 7/8 MAX. GRIP LENGTH.
9-19 = PIN, 9-32 DIA., 1-3/16 MAX GRIP LENGTH.

DIMENSIONS IN INCHES TO BE MET AFTER PLATING.

NOT FOR DESIGN.
FOR REPLACEMENT PURPOSES ONLY.

REINSTATED 6 JUNE 1966

APPROVED 20 JULY 58 REVISED

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIAN	MILITARY STANDARD	MS21000
Air Force		
PROCUREMENT SPECIFICATION None	PIN-FLATHEAD, HI-SHEAR, OVERSIZE, 160,000 PSI	(SHEAR)

DD FORM 1 NOV 58 1233

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:24Z
Check the source to verify that this is the current version before use.