
FED. SUP CLASS
6620

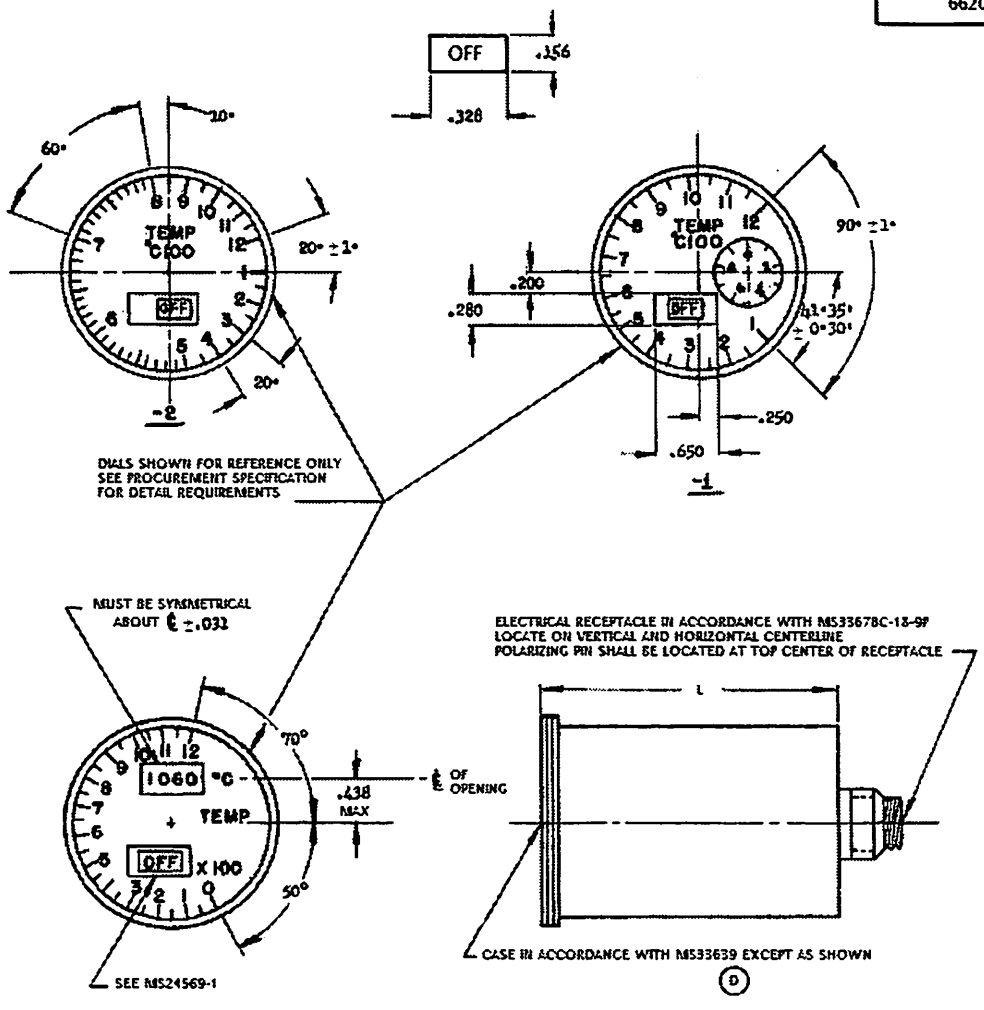

DASH NO.	APPROXIMATE SCALE LENGTH DEGREES	L ±.250
-1	270	5.750
-2	340	
-3	240	6.250

BREAK SHARP EDGES APPROX .010 RAD.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .016.

THE "OFF" WARNING SHALL BE LOCATED WITHIN THE AREA DEFINED.
THE NUMERAL 4 MAY BE OMITTED FROM THE -3 DIAL.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 29 Jan 60 REVISED (A) 13 Feb 61 (B) 15 Aug 61 (C) 15 Nov 65 (D) 18 Feb 66

Review activities: USAF - 11 Navy - WP

This military standard is approved by the Department of the Air Force and the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. USAF-11 Other Cust Navy - WP	TITLE INDICATOR, TEMPERATURE - THERMOCOUPLE, SELF BALANCING POTENTIOMETER TYPE	MILITARY STANDARD MS24569(ASG)
PROCUREMENT SPECIFICATION MIL-I-27209 (ASG)	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 97 672-1 (Limited coordination)

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:57Z
Check the source to verify that this is the current version before use.