FED. SUP CLASS
6150

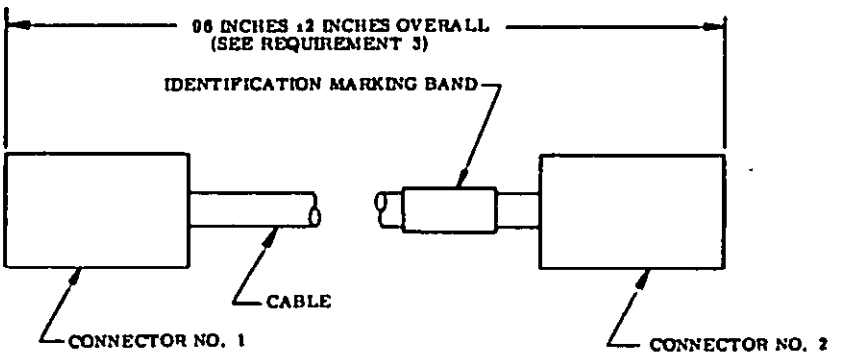


FIGURE 1

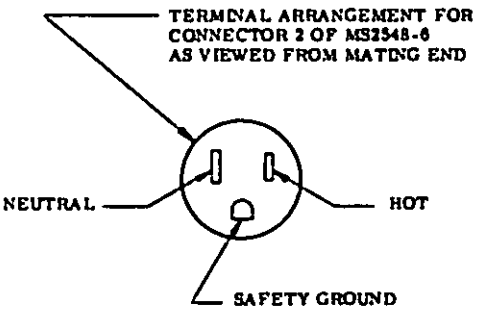


FIGURE 2

inch	mm
1.00	25.40
2.00	50.80
8.00	203.20
96.00	2438.40

APPROVED 7 JUNE 1957 REVISED (A) 12 JUNE 1973 (B) 9 JAN 1974 (C) 18 JULY 1979

© ENTIRE STANDARD REVISED

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by; that activity. All other military activities are required to comply with standard where suitable.

P.A. NAVY - AS Other Cost	TITLE CABLE ASSEMBLIES, ELECTRIC POWER, FOR PORTABLE GROUND SUPPORT TEST EQUIPMENT	MILITARY STANDARD MS2548(AS)
PROCUREMENT SPECIFICATION MIL-C-3885	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 JAN 72 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO 17709

(PROJECT NO. 6150-N177)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:57Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 6150

DASH NO.	CABLE ASSEMBLY	CONNECTOR NO. 1		CABLE		CONNECTOR NO. 2	
		TYPE	TERMINALS	TYPE	WIRE COLOR	TYPE	TERMINALS
-1	115 VOLTS 1-φ 60 Hz	W-C-596/13-3	HOT PIN	CO-03MGF (3/16) 0365	BLACK	MS3106A-10SL-3S	C
			NEUTRAL		WHITE		A
			GROUND		GREEN		B
-2	115 VOLTS 1-φ 60 Hz	MIL-C-28777/5 CABLE ASSEMBLY WITH MOLDED PLUG			BLACK	MS3106A-10SL-3S	C
					WHITE		A
					GREEN		B
-3	115 VOLTS 1-φ 400 Hz	MS3507A-20-4P	A	CO-03MGF (3/16) 0365	BLACK	MS3436A20-4S	A
			D		WHITE		D
			SHELL		GREEN		SHELL
-4	115/200 VOLTS 3φ 400 Hz	MS3507A-20-4P	A	CO-05MGF (5/16) 0455	BLACK	MS3436A20-4S	A
			B		RED		B
			C		ORANGE		C
			D		WHITE		D
			SHELL		GREEN		SHELL
-5	28 VOLTS D. C.	MS3107A-16-11P	A	CO-02MGF (2/14) 0400	WHITE	MS3106A-16-11S	A
			B		BLACK		B
-6	ADAPTER* 60/400 Hz	MS3507A-20-4P	A	CO-03MGF (3/16) 0365	BLACK	W-C-596/14-2	HOT
			D		WHITE		NEUTRAL
			SHELL		GREEN		GROUND

* SEE REQUIREMENT 3

REQUIREMENTS:

1. CABLE SHALL BE IN ACCORDANCE WITH MIL-C-3432.
2. CABLE CLAMPS SHALL BE USED WITH CONNECTORS WHEN APPLICABLE.
3. MS2548-6 ADAPTER CABLE ASSEMBLY SHALL BE 8 INCHES ± 1 INCH IN LENGTH.
4. IDENTIFICATION MARKING BANDS. IDENTIFICATION MARKINGS AND BANDS SHALL BE IN ACCORDANCE WITH MIL-N-18307.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. METRIC EQUIVALENTS (TO THE NEAREST .01 mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm.
3. INTENDED USE. - THESE CABLES ARE INTENDED FOR INSTALLATION ON AVIONICS SUPPORT EQUIPMENT WHICH REQUIRE ELECTRIC POWER AS DESCRIBED ABOVE.
4. MS2548-1 SUPERSEDES CX-3277/U CABLE ASSEMBLY.
5. MS2548-1 IS NOT TO BE USED FOR NEW DESIGN. USE MS2548-2.
6. 60/400Hz EQUIPMENT WITH MS2548-1 OR MS2548-2 CABLE ASSEMBLIES CAN BE OPERATED ON 400 Hz POWER WHEN MS2548-6 ADAPTER IS USED.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
8. FOR DESIGN FEATURE PURPOSES. THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

FOR CHANGES SEE SHEET 2

APPROVED 7 JUNE 1957 REVISED ©

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to comply with this standard where suitable.

P.A. NAVY - AS Other Cust	TITLE: CABLE ASSEMBLIES, ELECTRIC POWER, FOR PORTABLE GROUND SUPPORT TEST EQUIPMENT	MILITARY STANDARD MS2548(AS)
PROCUREMENT SPECIFICATION MIL-C-3885	SUPERSEDES:	SHEET 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:57Z
Check the source to verify that this is the current version before use.