


FED. SUP CLASS
2920

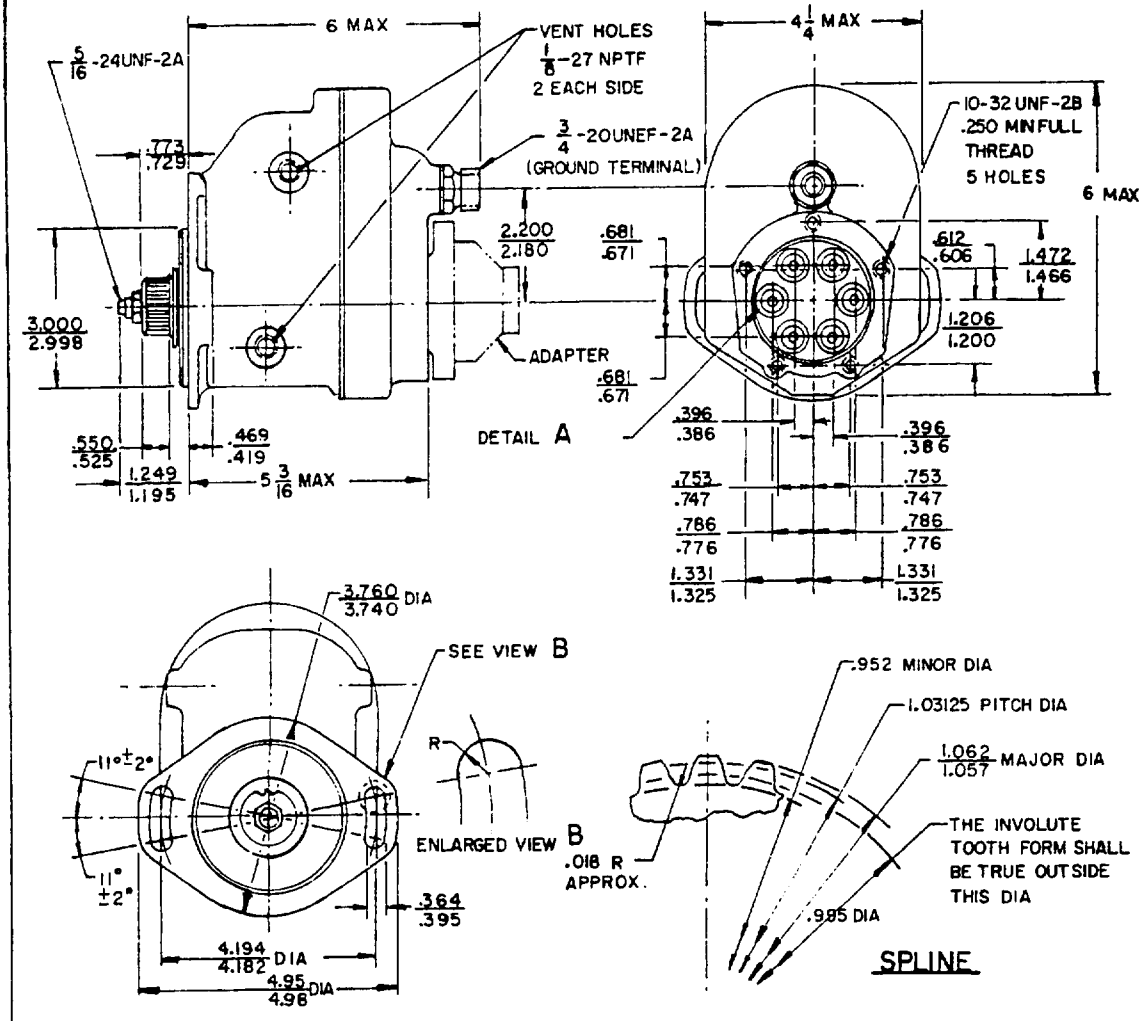

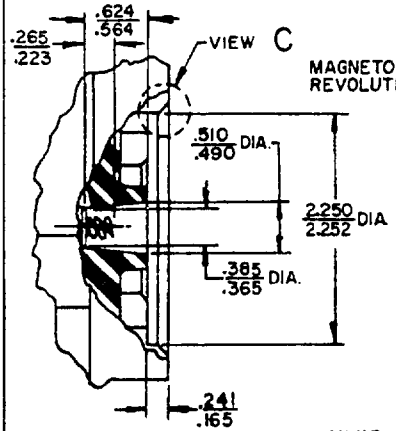

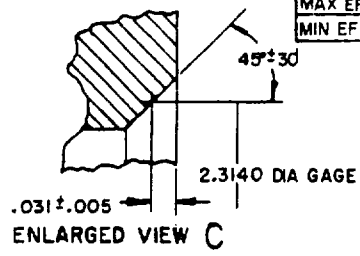

SPLINE DATA	
NO. OF TEETH	33
DIAMETRAL PITCH	32/64
TOOTH FORM INVOLUTE	20°
MIN ACTUAL CIRCULAR TOOTH THICKNESS	.0451
MAX EFFECTIVE TOOTH THICKNESS	.0481
MIN EFFECTIVE TOOTH THICKNESS	.0456

THIS IS A DESIGN STANDARD

APPROVED 18 AUGUST 1960 REVISED (A) 1 SEPTEMBER 1967

REVIEW ACTIVITIES: ARMY-ME; NAVY-SH, MC
USER ACTIVITIES: ARMY-AT

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust	TITLE MAGNETO, IGNITION: HIGH TENSION, 6 CYLINDER	MILITARY STANDARD MS 51333
PROCUREMENT SPECIFICATION MIL-M-13839	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

*U.S. GOVERNMENT PRINTING OFFICE: 1967-301-512/1627

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:59Z
Check the source to verify that this is the current version before use.