

FED SUP CLASS
5306



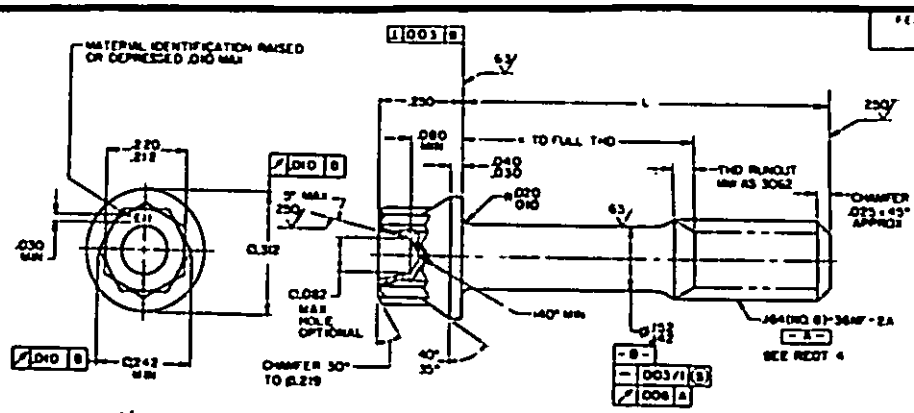

SECTION THRU THREAD PROFILE



OPTIONAL SHAPE OF HEAD

TABLE I DASH NUMBERS AND DIMENSIONS

DASH NO.	L	K +.000 -.060	APPROX WEIGHT LB/100
-03	.312	1/	.451
-04	.375	1/	.482
-05	.438	1/	.513
-06	.500	1/	.543
-07	.562	1/	.573
-08	.625	1/	.604
-09	.688	1/	.634
-10	.750	.125	.664
-11	.812	.188	.695
-12	.875	.250	.725
-13	.938	.312	.756
-14	1.000	.375	.786
-15	1.062	.438	.816
-16	1.125	.500	.847

DASH NO.	L	K +.000 -.060	APPROX WEIGHT LB/100
-17	1.188	.562	.878
-18	1.250	.625	.908
-19	1.312	.688	.938
-20	1.375	.750	.969
-21	1.438	.812	.999
-22	1.500	.875	1.029
-23	1.562	.938	1.060
-24	1.625	1.000	1.090
-25	1.688	1.062	1.121
-26	1.750	1.125	1.151
-27	1.875	1.250	1.212
-28	2.000	1.375	1.273

1/ THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

REQUIREMENTS:

1. MATERIAL: STEEL AMS 6322 (UNS G87400).
2. HARDNESS: 26-32 HRC
3. FINISH: BLACK OXIDE TREATMENT IN ACCORDANCE WITH AMS 2485
4. THREADS: THREADS IN ACCORDANCE WITH MIL-S-7742. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
6. KNURLING CONFIGURATION: KNURLING CONFIGURATION IN ACCORDANCE WITH AS 870.
7. SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD.
8. MAGNETIC PARTICLE INSPECTION: MAGNETIC PARTICLE INSPECTION PER AMS 2640.
9. TOLERANCE: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010 , ANGULAR DIMENSIONS ±5° .
10. EDGES: BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

INACTIVE FOR NEW DESIGN AFTER 26 OCT 72

Ⓑ ENTIRE STANDARD REVISED

P.A. NAVY-AS; Other Cust: AIR FORCE-11	INTERNATIONAL INTEREST	TITLE: BOLT-MACHINE, STEEL, 12 POINT HEAD, .164(NO. 8)-36, BLACK OXIDE	MILITARY STANDARD MS9190
PROCUREMENT SPECIFICATION: AMS 7452	SUPERSEDES:		PAGE 1 OF 2

APPROVED 31 MAR 58 REVISED Ⓑ 13 JUL 87

USER ACTIVITIES:

REVIEWER ACTIVITIES: DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Reference for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-1175

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5306

11. PART NUMBER: THE PART SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9190-03

- DASH NUMBER
- BASIC MS NUMBER

MS9190-03 INDICATES: BOLT-MACHINE, STEEL, 12 POINT HEAD, .164-36, BLACK OXIDE, .312 LONG

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 31 MAR 58 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES:
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. NAVY-AS / Other Cust AIR FORCE-11	INTERNATIONAL INTEREST	TITLE: BOLT-MACHINE, STEEL, 12 POINT HEAD, .164(NO.8)-36, BLACK OXIDE	MILITARY STANDARD MS9190
PROCUREMENT SPECIFICATION: AMS 7452	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-1175

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1988 505-033/90229