MS9923 (ASG)

FED SUP CLASS
5306

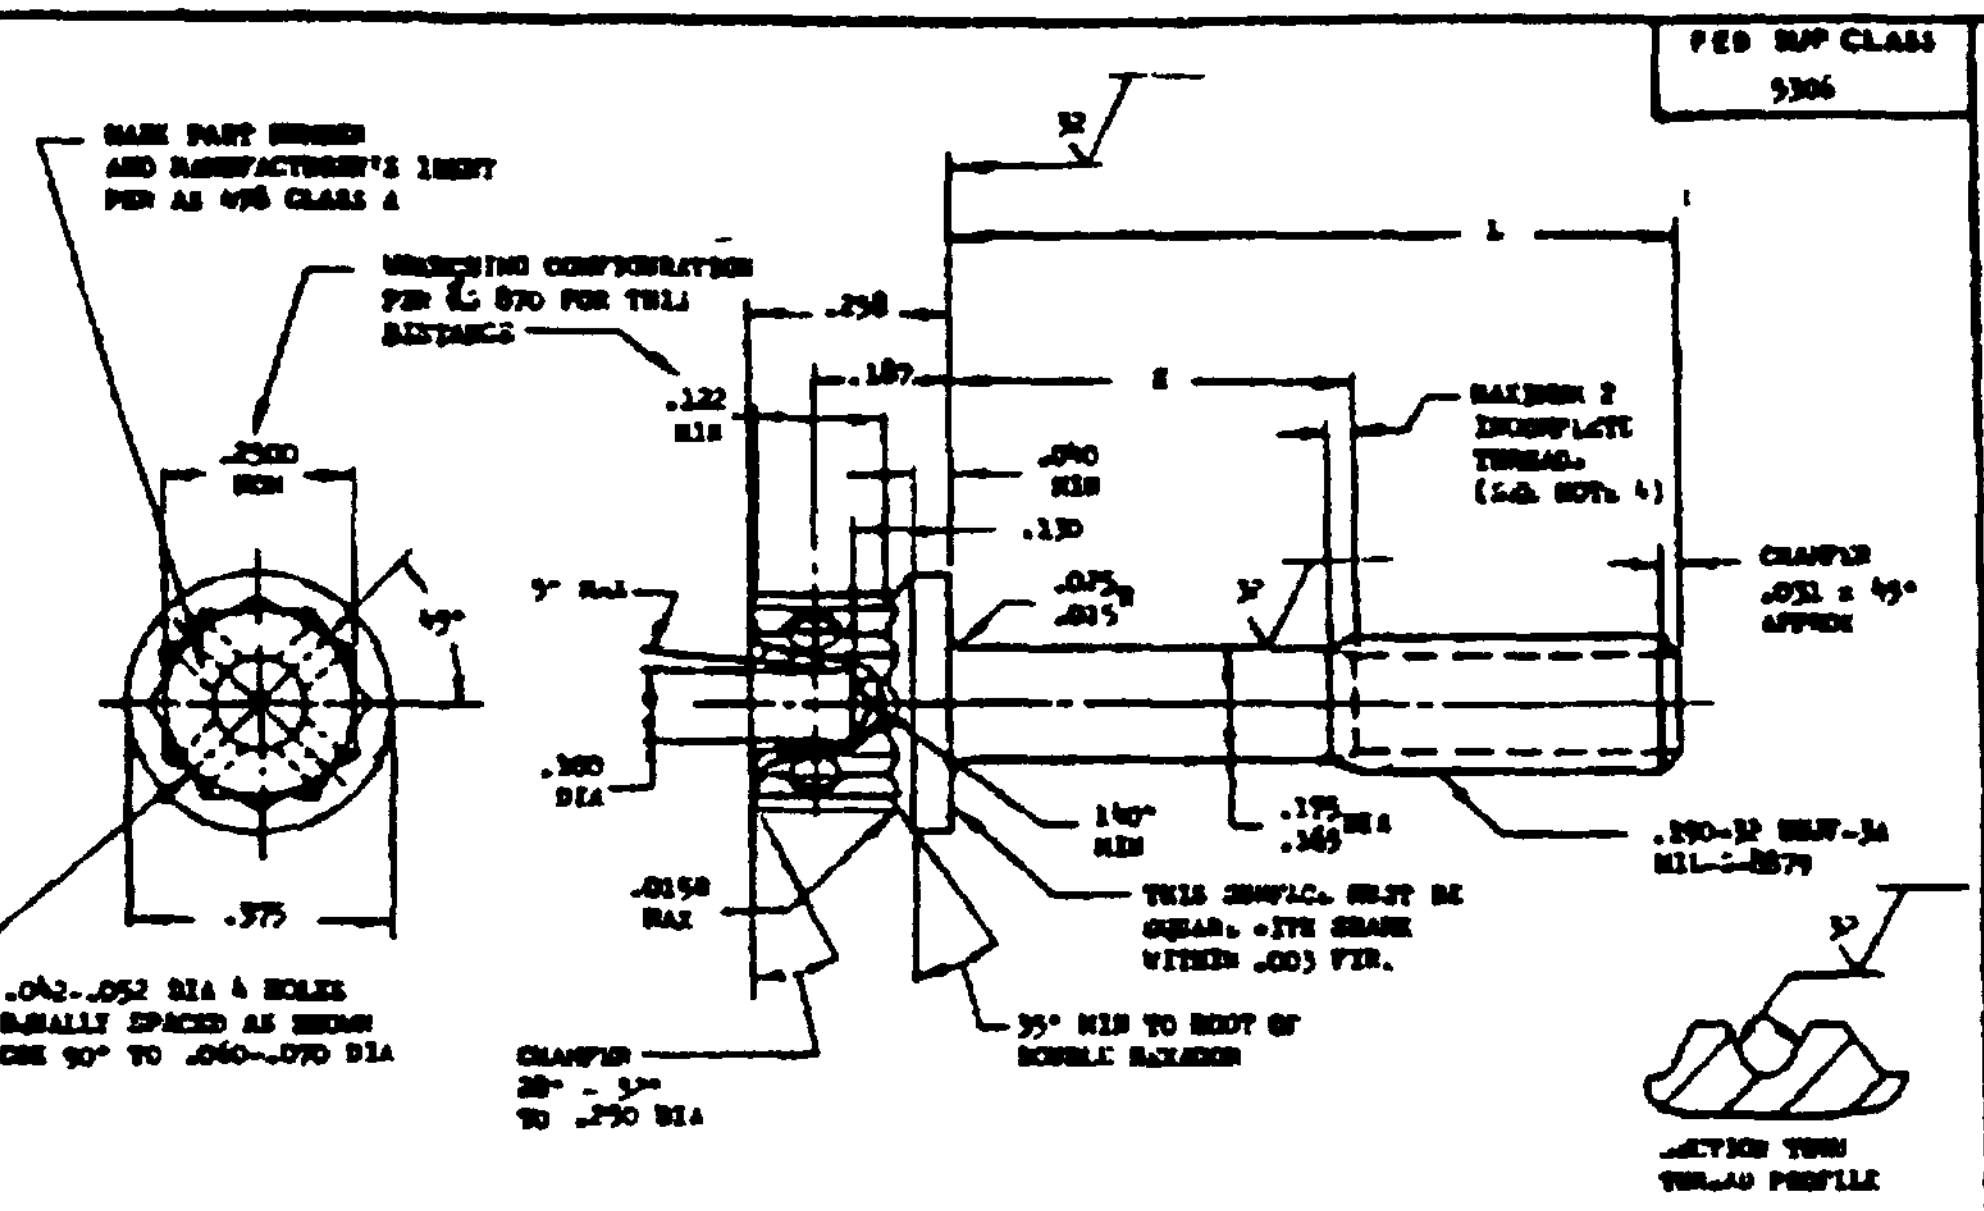

MARK PART NUMBER AND MANUFACTURER'S IDENT PER AS 478 CLASS A
WRENCHING CONFIGURATION PER AS 870 FOR THIS DISTANCE
.2500 MIN
45°
.375
.042-.052 DIA 4 HOLES EQUALLY SPACED AS SHOWN CSK 90° TO .060-.070 DIA
.250
.187
.122 MIN
.040 MIN
.130
.075 / .015 R
5° MAX
.380 DIA
.0150 MAX
CHAMFER 28° - 32° TO .250 DIA
140° MIN
.175 / .165 R
THIS SURFACE MUST BE SQUARE WITH SHANK WITHIN .003 FIR.
35° MIN TO ROOT OF DOUBLE HEXAGON
32
L
K
MAXIMUM 2 INCOMPLETE THREADS (SEE NOTE 4)
32
CHAMFER .031 x 45° APPROX
.190-32 UNJF-3A MIL-S-8879
32
SECTION THRU THREAD PROFILE

PART NO.	L	K	APPROX WEIGHT LB/100	PART NO.	L	K	APPROX WEIGHT LB/100	PART NO.	L	K	APPROX WEIGHT LB/100
MS9923-03	.312	.072- .092	.65	MS9923-21	1.438	.748- .808	1.36	MS9923-39	3.125	2.435-2.495	2.44
MS9923-04	.375	.072- .092	.69	MS9923-22	1.500	.810- .870	1.40	MS9923-40	3.250	2.560-2.620	2.52
MS9923-05	.438	.072- .092	.72	MS9923-23	1.562	.872- .932	1.45	MS9923-41	3.375	2.685-2.745	2.61
MS9923-06	.500	.072- .092	.76	MS9923-24	1.625	.935- .995	1.48	MS9923-42	3.500	2.810-2.870	2.69
MS9923-07	.562	.072- .092	.80	MS9923-25	1.688	.998-1.058	1.52	MS9923-43	3.625	2.935-2.995	2.77
MS9923-08	.625	.072- .092	.84	MS9923-26	1.750	1.060-1.120	1.56	MS9923-44	3.750	3.060-3.120	2.85
MS9923-09	.688	.072- .092	.88	MS9923-27	1.812	1.122-1.182	1.60	MS9923-45	3.875	3.185-3.245	2.93
MS9923-10	.750	.072- .120	.92	MS9923-28	1.875	1.185-1.245	1.64				
MS9923-11	.812.	.122- .182	.96	MS9923-29	1.938	1.248-1.308	1.68				
MS9923-12	.875	.185- .245	1.00	MS9923-30	2.000	1.310-1.370	1.72				
MS9923-13	.938	.248- .308	1.04	MS9923-31	2.125	1.435-1.495	1.80				
MS9923-14	1.000	.310- .370	1.08	MS9923-32	2.250	1.560-1.620	1.88				
MS9923-15	1.062	.372- .432	1.12	MS9923-33	2.375	1.685-1.745	1.96				
MS9923-16	1.125	.435- .495	1.16	MS9923-34	2.500	1.810-1.870	2.04				
MS9923-17	1.188	.498- .558	1.20	MS9923-35	2.625	1.935-1.995	2.12				
MS9923-18	1.250	.560- .620	1.24	MS9923-36	2.750	2.060-2.120	2.20				
MS9923-19	1.312	.622- .682	1.28	MS9923-37	2.875	2.185-2.245	2.28				
MS9923-20	1.375	.685- .745	1.32	MS9923-38	3.000	2.310-2.370	2.36				

1. SHANK SHALL BE STRAIGHT WITHIN .003 PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON SHALL BE WITHIN .006 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6322.
6. HARDNESS: ROCKWELL C26-32.
7. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
8. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD SHALL BE UPSET.
9. HEAD TO SHANK FILLET SHALL BE COLD WORKED
10. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
11. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
12. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
13. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°
14. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AIRCRAFT PART STANDARDS DIVISION

APPROVED 15 Aug 69 REVISED

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

[illegible] activities:
USAF - 82, 85

P.A. USAF - 11 Other Cust Navy - AS	TITLE BOLT, MACHINE - DOUBLE HEXAGON EXTENSION WASHER HEAD [illegible] ON SHANK, STEEL AMS 6322, CADMIUM PLATED [illegible]	MILITARY STANDARD MS9923 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 MAY 59 672-1 (Limited coordination)
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U.S. GOVERNMENT PRINTING OFFICE: [illegible]

DATE

DRAWN BY ____________ ______

TYPED BY ____________ ______

CHECKED BY ____________ ______

NOTES TO PRINTER: REDUCE BORDER TO 6-27/32x9 3/4. PRINT LEFT BORDER-LINE ONE INCH FROM LEFT EDGE OF 8x10-1/2 SHEET. PRINT BOTTOM BORDER LINE 3/8 INCH FROM BOTTOM EDGE OF 8x10-1/2 SHEET. SIGNATURE FORM NOT TO BE INCLUDED ON 8x10-1/2 SHEET.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.