
MILITARY SPECIFICATION SHEET

CABLE, ELECTRICAL (FLEXIBLE, FLAT, UNSHIELDED) (FLAT CONDUCTOR-UNPLATED) 300 VOLTS, 105°C

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cables described herein shall consist of this document and the latest issue of Specification MIL-C-49059.

NOT FOR USE IN
AIRBORNE EQUIPMENT

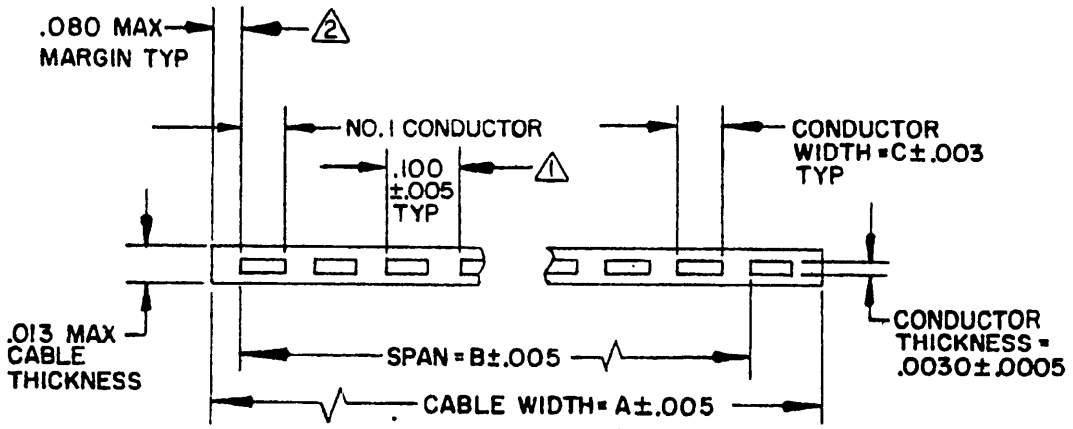

INCHES	MM	INCHES	MM
.0004	.01	.015	.38
.0005	.01	.021	.53
.001	.03	.025	.64
.002	.05	.050	1.27
.003	.08	.065	1.65
.005	.13	.080	2.03
.008	.20	.100	2.54
.013	.33	.200	5.08

NOTES:
1. The vertical axis of the identification marking characters shall be parallel to the longitudinal axis of the cable.
2. Identification marking shall be placed over the number one conductor, and shall not cover more than one conductor.
3. Individual conductor identification optional.
4. Conductor width and cable margin as specified in 3.1.

AWG Equiv. (Note 1)	Dimension (inches)				
	A See Table I	B (±.001)	C (±.002)	D (±.0004)	E (Note 4)
28	0.5, 1.0, 2.0	.015	.025	.005	.050
24	0.5, 1.0, 2.0	.015	.065	.005	.100
22	0.5, 1.0, 2.0	.018	.065	.008	.100
20	1.0, 2.0	.015	.160	.005	.200
18	1.0, 2.0	.018	.160	.008	.200

FIGURE 1. Identification marking.

FSC 6145

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.
Temperature rating: 105°C.
Voltage rating: 300 volts (rms) at sea level.
Cable weight: See table I.
Insulation flaws: Test voltage - AC - 1,500 volts (rms)
Test voltage - DC - 2,100 volts
Dielectric withstanding voltage: 1,500 volts (rms).
Insulation: Polethylene terephtalate.
Conductor resistance: Bare copper - 55.2 ohms per 1,000 feet at 20°C.
Flexing endurance:

Test temperature	Cycles
-55 ±5°C	600
105 ±5°C	600

Solderability: Not applicable.
Vacuum stability: Not applicable.
Fluid immersion: Not applicable.
Stripping tool: Carpenter's stripper, model number 44.
Part number: M49059/1 - (dash number from table I).

TABLE I. Dimensions and cable weight.

Dash no.	Supersedes code 00779 P/N	No. of conductors	A IN	B IN	C IN	AWG equiv.	Cable wt. max lb/1000 ft.
01	88762- 1	2	.300	.100	.062	26	2.7
02	- 2	3	.400	.200			4.1
03	- 3	4	.500	.300			5.4
04	- 4	5	.600	.400			6.7
05	- 5	6	.700	.500			8.1
06	- 6	7	.800	.600			9.4
07	- 7	8	.900	.700			10.8
08	- 8	9	1.000	.800			12.1
09	- 9	10	1.100	.900			13.4
10	1- 0	11	1.200	1.000			14.8
11	1- 1	12	1.300	1.100			16.1
12	1- 2	13	1.400	1.200			17.4
13	1- 3	14	1.500	1.300			18.8
14	1- 4	15	1.600	1.400			20.1
15	1- 5	16	1.700	1.500			21.5
16	1- 6	17	1.800	1.600			22.8
17	1- 7	18	1.900	1.700			24.2
18	1- 8	19	2.000	1.800			25.5
19	1- 9	20	2.100	1.900			26.8
20	2- 0	21	2.200	2.000			28.2
21	2- 1	22	2.300	2.100			29.5
22	2- 2	23	2.400	2.200			30.9
23	2- 3	24	2.500	2.300			32.2
24	2- 4	25	2.600	2.400			33.5
25	2- 5	26	2.700	2.500			34.9
26	2- 6	27	2.800	2.600			36.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:46Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and cable weight - Continued.

Dash no.	Supersedes code 00779 P/N	No. of conductors	A IN	B IN	C IN	AWG equiv.	Cable wt. max lb/1000 ft.
27	2- -7	28	2.900	2.700			37.6
28	2- -8	29	3.000	2.800			38.9
29	2- -9	30	3.100	2.900			40.2
30	3- -0	31	3.200	3.000			41.6
31	3- -1	32	3.300	3.100			42.9
32	3- -2	33	3.400	3.200			44.3
33	3- -3	34	3.500	3.300			45.6
34	3-88762 -4	35	3.600	3.400	.062	26	46.9

Custodians:
Army - CR
Navy - AS
Air Force - 11

Review activities:
Army - AR, AV, MI
Navy - EC, OS
Air Force - 17, 99
DLA - ES, IS
NSA
NAS
NASA - MSFC

User activities:
Army - AT, ME
Navy - SH
Air Force - 71, 99

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 6145-0718-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:46Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

)OCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-49059/1A

IAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

☐ VENDOR ☐ USER ☐ MANUFACTURER

. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT ISE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

. REMARKS

JBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

)D FORM 1426 1 OCT 76 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:46Z
Check the source to verify that this is the current version before use.

FOLD

HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID



HQ, USA CORADCOM
ATTN: DRDCO-CM-DM
Fort Monmouth, NJ 07703

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:46Z
Check the source to verify that this is the current version before use.