MIL-C-50344B (AR)
15 May 1990
SUPERSEDING
MIL-C-50344A (MU)
15 April 1971

MILITARY SPECIFICATION

COUNTER, ELECTRONIC: 10548009

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an electronic counter hereinafter, referred to as PRF (Pulse Repetition Frequency) counter, used in Subassembly Test Set MX-8048/TPM-22;, part of Radar Test Set AN/TPM-22, and Range Computer CP-888/VPS-2, part of Radar Set AN/VPS-2 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Materiel, Manufacture and Inspection General Specification for

Beneficial comments (recommendations, additions, deletions] and any pertinent data which may be of use in improving this document, should be addressed to: Commander U.S. Army ARDEC, ATTN: SMCAR-BAC-S, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

MIL-I-45607 Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-T-55164/l Terminal Boards, Molded, Barrier, Screw type, **Class** 37TB

STANDARDS

MILITARY

MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-810 - Environmental Test Methods and Engineering Guidelines
MIL--STD-2000 - Standard Requirements for Soldering Electrical and Electronic Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from Standardization Documents order Desk, Bldg. 4D, 700 Robbins Avenue. Philadelphia, PA 19111-5094.)

2.1.2 other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (see 6.4)

U.S. **ARMY** ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

10548009 – PRF Counter

PACKAGING DATA SHEET

PS10548009 - Packaging of PRF Counter

(Copies of drawings, publications, and other Government documents required by contractors in connection with specific **acquis** ition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T20:22Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 10548009, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the PRF counter shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and tolerances
b. Inorganic protective surface finishings
c. Part identification and marking
d. Workmanship

3.3 Environmental service conditions.

3.3.1 Vibration. The PRF counter shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
10 to 15 hertz	0.06 inches double amplitude
15 to 25 hertz	0.04 inches double amplitude
25 to 55 hertz	0.02 inches double amplitude

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% per decade.
The 10-55-10 hertz sweep time is 3 minutes 45 seconds ± 10%.

3.3.2 Shock. The PRF counter shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

3.3.3.1 Operating. The PRF counter shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).

3.3.3.2 Non-operating. The PRF counter shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

3.3.4 Temperature.

3.3.4.1 Operating. The PRF counter shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between-40 degrees F and +155 degrees F.

3.4.2 Non-operating (storage). The PRF counter shall not suffer permanent damage when subjected to the constant temperature extremes of -60 degrees F for a period of 24 hours and +160 degrees F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to and stabilized at room ambient.

3.3.5 Humidity (non-operating) The PRF counter shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the PRF counter.

3.5 Performance. When supplied with the inputs specified in Table I, the PRF counter shall yield the outputs specified in Table I.

TABLE I. Input and output characteristics

REQUIREMENT	CHARACTERISTIC	TERMINALS
INPUT POWER	5.0 ± 0.3 Vdc, regulated; ac ripple less than 50 mv peak-to-peak capacity 300 mA	P1-30, P1-31, & P1-32 (+5 V): P1-24, P1-25, & P1-26 (RET)
INPUT SIGNALS:		
Cp	7.5 MHz square wave or sine wave amplitude 4.3 to 5.2 V Peak-to-peak.	P1-47
Cpd	Same as Cp, except delayed 20 to 40 ns from **Cp.**	P1-45
OUTPUT SIGNALS:		
PRF RESET	20-KHz negative pulse (from not less than +3 Vdc level to zero V and return), 0.067 us wide.	P1-52 & P1-53

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

TABLE 1. Input and output characteristics(continued)

REQUIREMENT	CHARACTERISTICS	TERMINALS
PRF CAL	20-KHz negative pulse pair (from not less than +3 Vdc level to zero V and return), displaced 127 clock pulses (16.89 us) from PRF RESET.	P1-37
STROBE	Train of 15 negative pulses (from not less than +3 Vdc level to zero V and return), 0.133 usec wide, on 1.064 us centers, leading edge of first pulse displaced 261 clock pulses (34.713 us) from leading edge of PRF RESET.	P1-12
T1	20-KHz negative pulse (from not less than +3 Vdc level to O V and return), 0.798 usec wide; displaced 258 clock pulses (34.314 usec) from PRF RESET.	P1-22
T2	Same as T1, except displaced 266 clock pulses (35.378 usec) from PRF RESET.	P1-16
T3	Same as T1, except displaced 274 clock pulses (36.442 usec) from PRF RESET.	P1-15
T4	Same as T1, except displaced 282 clock pulses (37.506 usec) from PRF RESET.	P1-17
T5	Same as T1, except displaced 290 clock pulses (38.570 usec) from PRF RESET.	P1-7
T6	Same as T1, except displaced 298 clock pukes (39.634 usec) from PRF RESET.	P1-3
T7	Same as T1, except displaced 306 clock pulses (40.698 usec) from PRF RESET.	P1-13

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

TABLE I. Input and output characteristics (Continued)

REQUIREMENT	CHARACTERISTICS	TERMINALS
$\overline{T8}$	Same as T1, except displaced 314 clock pulses (41.762 us), from .	P1-11
$\overline{T9}$	Same as T1, except displaced 322 clock pulses (42.826 us) from PRF RESET.	P1-1
$\overline{T10}$	Same as T1, except displaced 330 clock pulses (43.890 us) from PRF RESET.	P1-9
$\overline{T11}$	Same as T1, except displaced 338 clock pulses (44.954 us) from PRF RESET.	P1-4
$\overline{PRF}$	1) When P1-53 is connected to P1-41, 20-KHz negative pulse (from not less than +3 Vdc level to zero V and return), approximately 0.6 us wide, leading edge delayed 20 $^{+20}_{-lo}$ ns from leading edge of PRF RESET .	Pi-lo
	2) When P1-37 is connected to P1-41, 20-KHz negative pulse (from not less than +3 Vdc level to zero V and return), approximately 0.73 us wide, leading edge delayed 127 clock pulses (approximately 16.89 us) from leading edge of PRF RESET.	

NOTE : The delays specified in this table may be slightly longer because of propagation delays. Frequencies and time delays specified will vary with changes of the input frequency.

3.6 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3) .

3.7 Workmanship. The workmanship requirements of MIL-F-13926, shall apply except for soldering.

Source: https://assist.dla.mil Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

3.8 Soldering. All soldering shall be in accordance with the general requirements of MIL-STD-2000 in addition to detail requirement (task) F of paragraph 1.2 of MIL-STD-2000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4*1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and s and all applicable drawings. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c* Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. - Unless otherwise spececified, all examinations and tests shall be conducted at the following standard ambient conditions:

	Temperature	+50 deg to +90 deg F.
b.	Relative humidity	90% RH Max.
c.	Pressure	28 to 32 inches of Hg.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

4.3 First article inspection.

4.3.1 First article submission. The requirement for first article and the responsibility (Government or contractor) for the first article testing shall be as specified in the contract and the applicable drawing. The sample for the first article tests shall consist of three PFR counters manufactured in the same manner, using the same materials, equipment, processes and procedure as in regular production. All parts and materials, including packaging and packing, shall be obtained from the dame source of supply as used in regular production.

4.3.2 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any PRF counter to comply with any of the stated requirements.

4.4 Quality conformance inspection.

4.401 Inspection lot formation. The term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100 percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies. All components, assemblies and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed in accordance with sampling plans specified in 4.4.2. 3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated Classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot .

4.4.2.3 Functional tests. The tests in Table II shall be performed on a 100% basis.

TABLE II. Functional tests
(100% Inspection)

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		None	N/A
Major:			
101.	Electrical	3*4	4.7.2
102.	Performance	3.5	4.7.3
Minor:		None	N/A

4.5 Special sampling. One PRF counter out of the first 50 produced and one out of each 100 Produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table II and shall then meet the tests in Table III. Unless otherwise specified in the contract the items shall be returned to the lot upon successful completion of testing.

TABLE III . Special sampling

CHARACTERISTIC		REQUIREMENTS	TEST PROCEDURE
Critical:		None	N/A
Major:			
103.	Vibration	3.3.1	4.7.1.1
104.	Shock	3.3.2	4.7.1.2
105.	Altitude	3*3.3	4.7.1.3
106.	Temperature	3.3.4	4.7.1.4
107.	Humidity	3.3.5	4.7.1.5
Minor:		None	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

4.5.1 Failure of Sample. Should any one item of a special sampling fail to meet any of the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment. Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment.

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number iN specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.3.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" **specified in 4.7 of this** specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.3.


4.6.2.3 Test equipment. In conjunction with **4.6.2.1 and** 4.6.2.2, **the test** equipment listed in Table IV shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

TABLE IV. Test equipment list

ITEM NUMBER	DESCRIPTION
1. Power Supply	5.0 + 0.3 vdc, regulated; ac ripples less that 50 mv peak-to-peak; capacity 300 mA.
2. Signal generator	7.5 MHz square wave or sine wave amplitude 5.0 ± 0.2 v peak-to-peak, into 50-ohm load.
3. Test fixture	As specified in Figure 1. See Table V for test fixture parts list.
4. Oscilloscope	Dual channel rise time of scope plus measuring probe 10 ns or less. Sweep period 50 ns per division or greater. Input resistance greater than 8 megohms. Input capacitance less than 25 uF.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

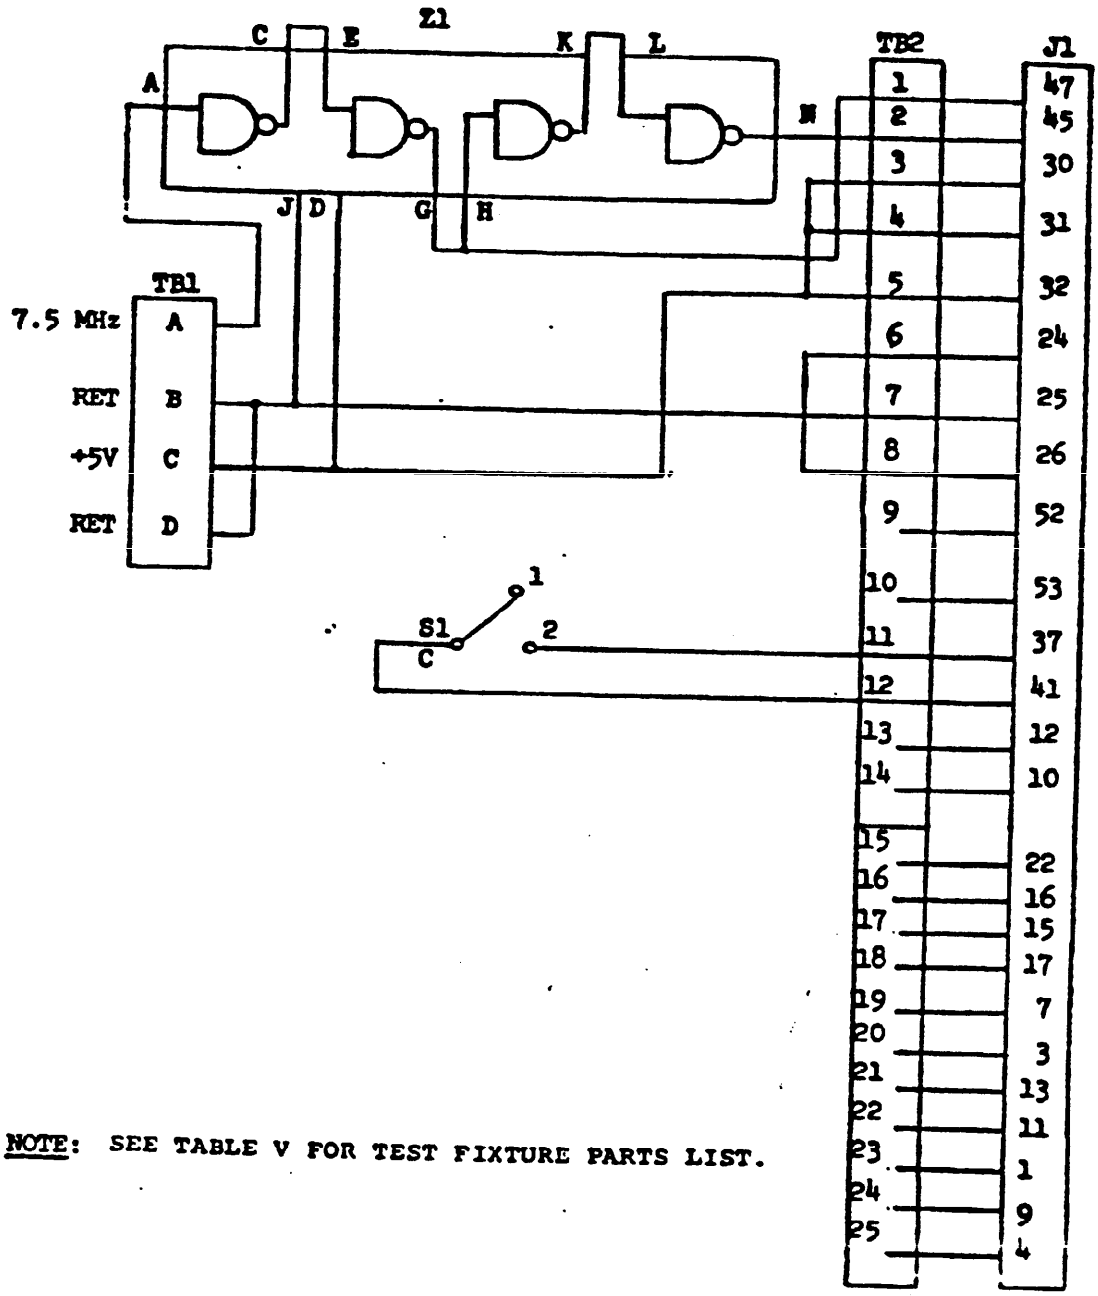

NOTE: SEE TABLE V FOR TEST FIXTURE PARTS LIST.

FIGURE 1. Test fixture setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

TABLE V. Test fixture parts list

DESIGNATION	NOMENCLATURE AND DESCRIPTION
TB1	Terminal board, 37TB-4 conforming to MIL-T-55164/1 or equivalent.
TB2	Terminal board, 37TB-4 conforming to MIL-T-55164/1 or equivalent.
TB3	Terminal board 37TB-12 conforming to MIL-T-55164/1 or equivalent.
J1	Connector; any of the following or equivalent: (1) 5893232-1, Malco Mfg. Co., Inc. Chicago, Illinois. (2) 500946-1, National Connector Corp. Minneapolis, Minn. (3) **07-5422-0198-01**, Elco Corp., Willow Grove, Pa.
Z1	Integrated Circuit, SG-140-03, Sylvania or equivalent.
S1	Switch, SPDT.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810 except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be **capable of meeting the conditions required.**

4.7.1.1 Vibration. The test shall be performed as specified in Method 514.3, Category 8, Procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of **Procedure I** only steps 4 through 8 of paragraph II-2.1 apply. The PRF counter shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the PRF counter shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

4.7.1.2 Shock . This test shall be performed as specified in Procedure I, Section II of Method 516.3 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

b. The shock pulses shall **be 15 g's ± 10% amplitude** and 11 ms ± 10% duration.

c. The **maximum g** shall occur at **5.5** milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the PRF counter shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating) This test shall be performed as specified in Procedures II and III, Method 500.2 of MIL-STD-810. The operational checkout shall be as specified in 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.1.4.1 High (operating and non-operating~. This test shall be performed as specified in procedures I and II, Method 501.2 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.4.2 Low (operating and non-operating). This test shall be performed as specified in Procedures I and II, Method 502.2 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.

4.7.1.5 Humidity (non-operating) This test shall be performed in accordance with Procedure III, Method 507.2 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions.

4.7.2 Electrical. Continuity shall be inspected by standard measuring equipment (SME) and visual examination for compliance with 3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

4.7.3 Performance.

a. Connect test equipment (Table IV, items 1 through 4) as shown in Figure 2.

b. Adjust power supply and signal generator, items 1 and 2 of Table IV, to deliver outputs described as "Input power" and "Input signal (Cp)" in Table I.


Insert PRF counter into jack J1 in test fixture, (Table IV,item 3). Output signal labeled PRF RESET in Table I shall appear on channel A of oscilloscope (Table IV, item 4.).

d. Use channel B of oscilloscope to check for presence of output signals of Table I at the terminals of test fixture (Table IV, item 3) shown in Table VI.

TABLE VI. Test fixture output signal terminals

OUTPUT SIGNAL	TEST FIXTURE TERMINAL
$\overline{\text{PRF RESET}}$	TB2-9 & TB2-10
$\overline{\text{PRF CAL}}$	TB2-11
$\overline{\text{STROBE}}$	TB2-13
T1	TB3-15
$\overline{\text{T2}}$	TB3-16
$\overline{\text{T3}}$	TB3-17
T4	TB3-18
T5	TB3-19
$\overline{\text{T6}}$	TB3-20
$\overline{\text{T7}}$	TB3-21
$\overline{\text{T8}}$	TB3-22
T9	TB3-23

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

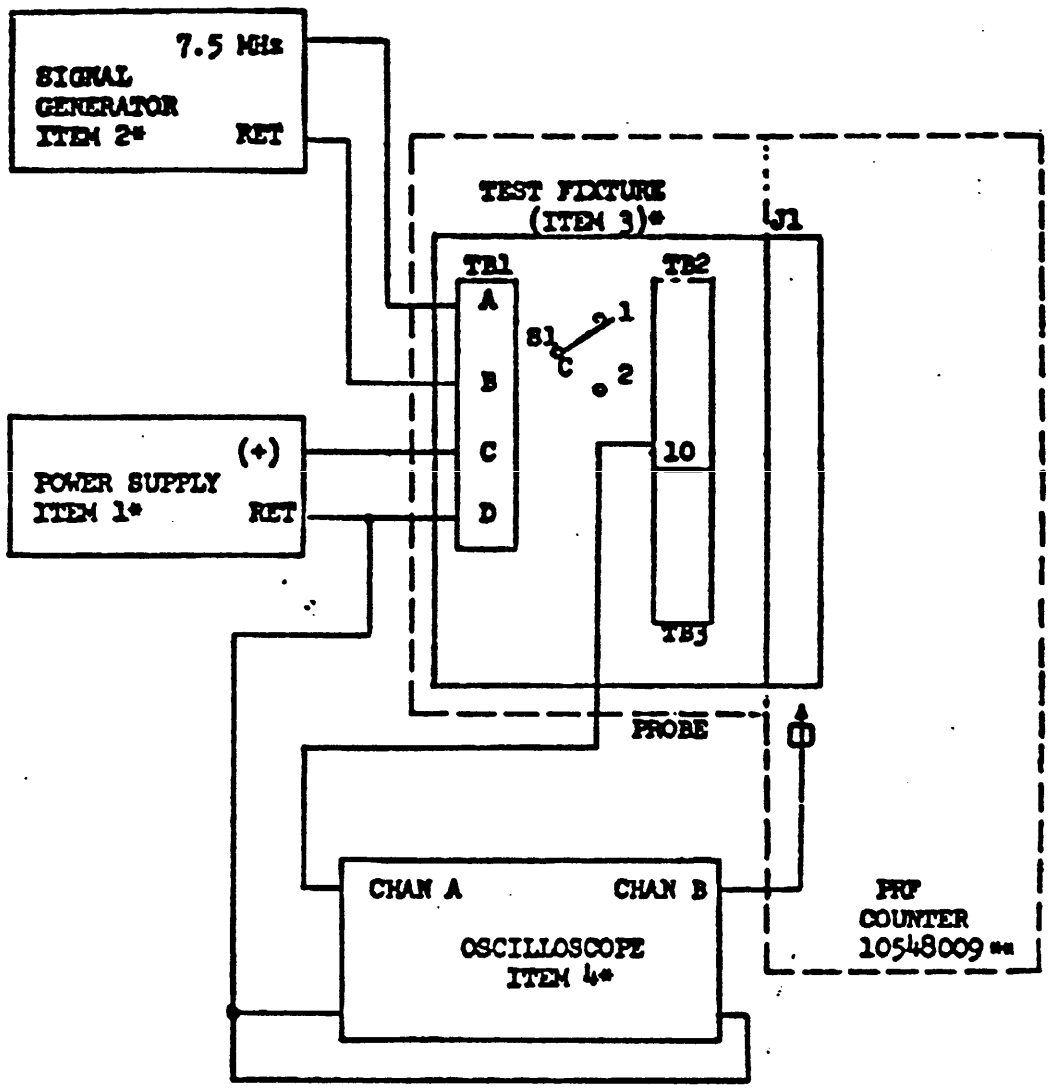

*REFER TO 4.6.2.3

** REFER TO 2.1

FIGURE 2. PRF counter test setup

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:22Z
Check the source to verify that this is the current version before use.

TABLE VI. Test fixture output signal terminals (Continued)

OUTPUT SIGNAL	TEST FIXTURE TERMINAL
T10 TB3-25	TB3-24
$\overline{PRF}$, condition 1	TB2-14, with switch S1 in pos. 1
$\overline{PRF}$, condition 2	TB2-14, with switch S1 in pos. 2

5. PACKAGING

5.1 General. Preservation, packing, and marking shall be in accordance with Packaging Data Sheet PS10548009. The level of protection shall be as specified in the procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The PRF counter is used in Subassembly Test Set MX-8048/TPM-22, part of Radar Test Set AN/TPM-22, and in Range Computer CP-888/VPS-2, part of Radar Set AN/VPS-2. The PRF counter is a digital counter. It counts down from a 7.5 megahertz (MHz) input signal and yields output signals of specified duration at fixed intervals. In the radar set these output signals are used to generate the radar PRF and timing pulses while in the test set they are used in checking the performance of the receiver of Radar Set AN/VPS-2.

6.2 Acquisition requirements. Procurement documents shall specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. Applicable stock number.
c. First Article Sample requirements.
d. Packaging requirements, if other than specified in Section 5.
e. Serialization requirements, if applicable.
f. Certificate of conformance for each lot of shipment of product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

6.3 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC .

6.5 Subject term (Key word listing).

Fire Control System
PRF counter
Radar Set AN/VPS-2
Radar Test Set AN/TPM-22
Range Computer CP-888/VPS-2
Subassembly Test Set MX-8048/TPM-22
VADS

6.6 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A698)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-50344B (AR)	15 May 1990

3. DOCUMENT TITLE

COUNTER, ELECTRONIC: 10548009

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
US Army ARDEC Standardization & Specification Office	(1) Commercial (201) 724-6674	(2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S/Bldg 6 Picatinny Arsenal, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T20:22Z
Check the source to verify that this is the current version before use.